



Experiments

Noiseless regression: $y_i = 2(6x_i \bmod 1) - 1$, $x_i \sim \mathcal{U}([0, 1])$ i.i.d. for $i = 1, \dots, 200$.


Step 1/3000

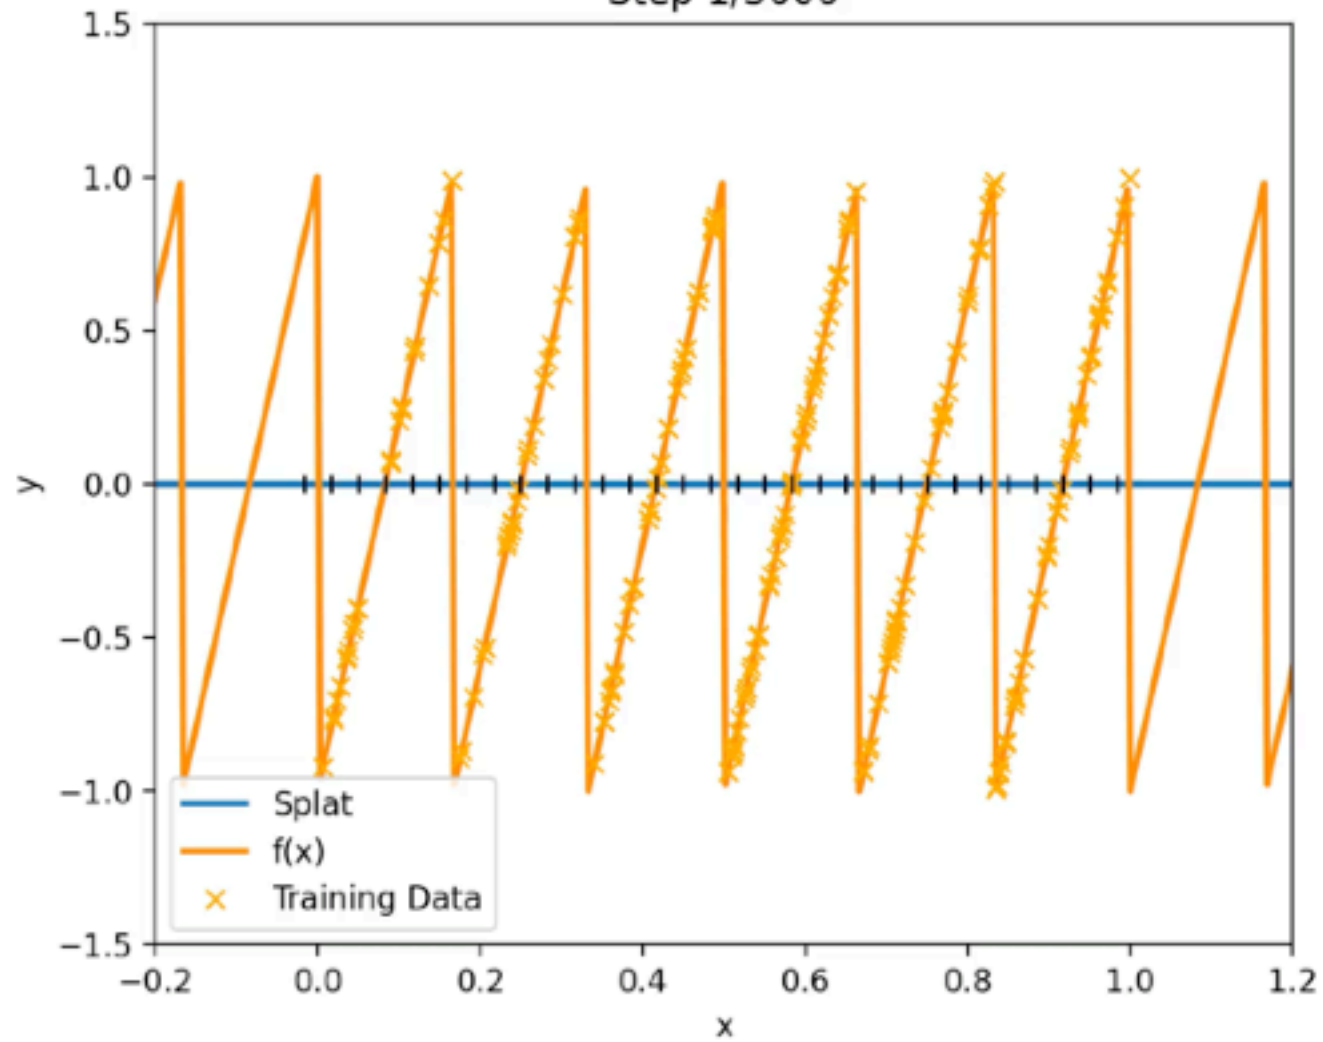


log(MSE)

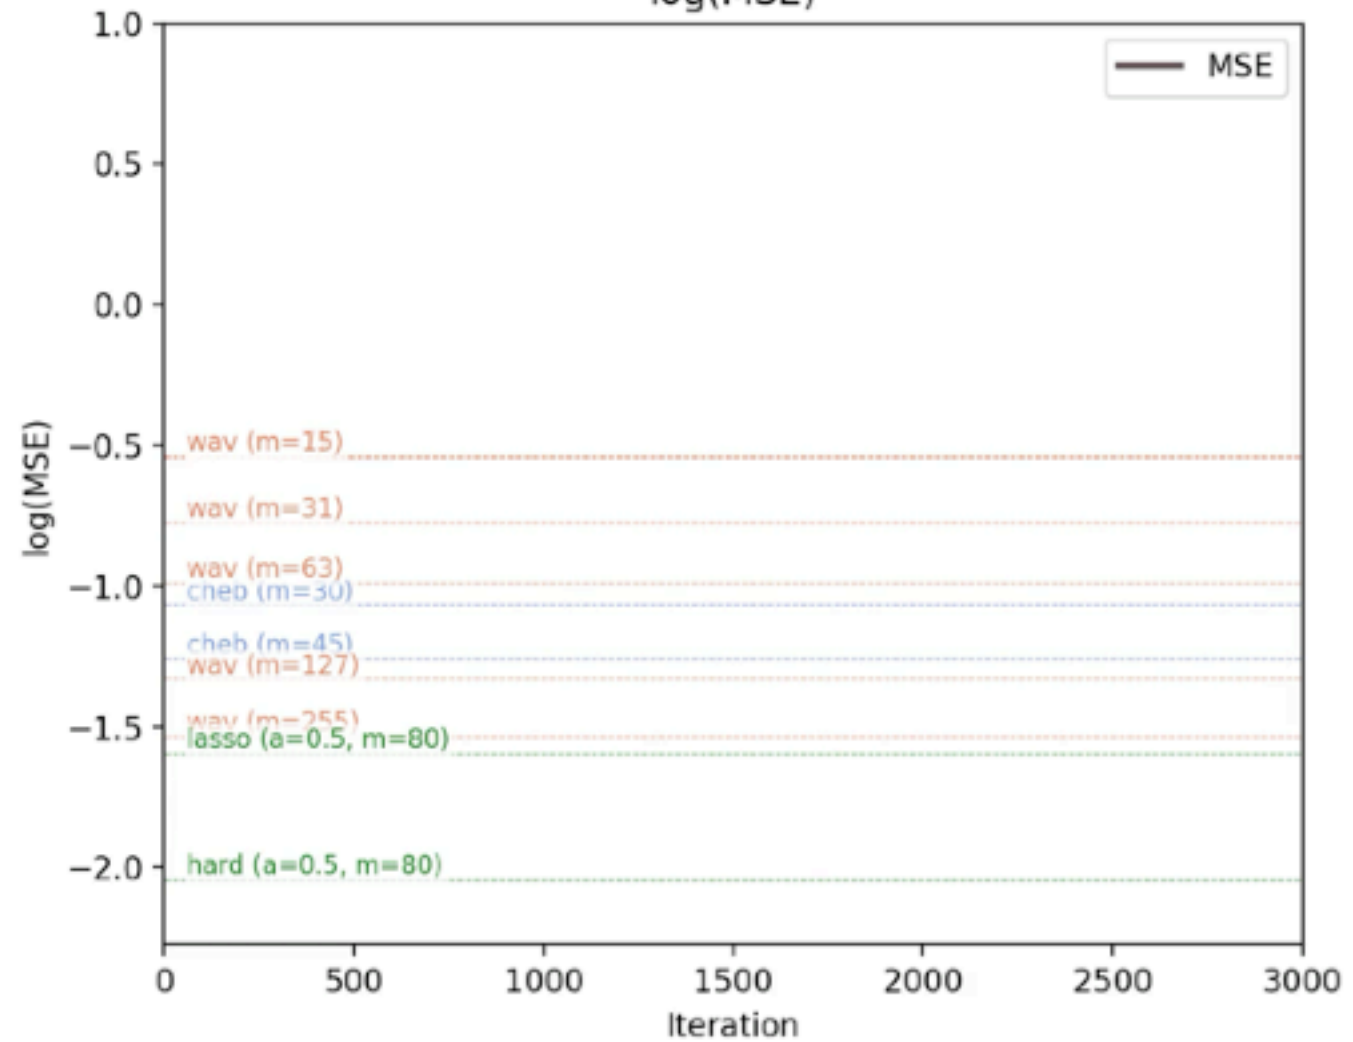


Step 1/3000

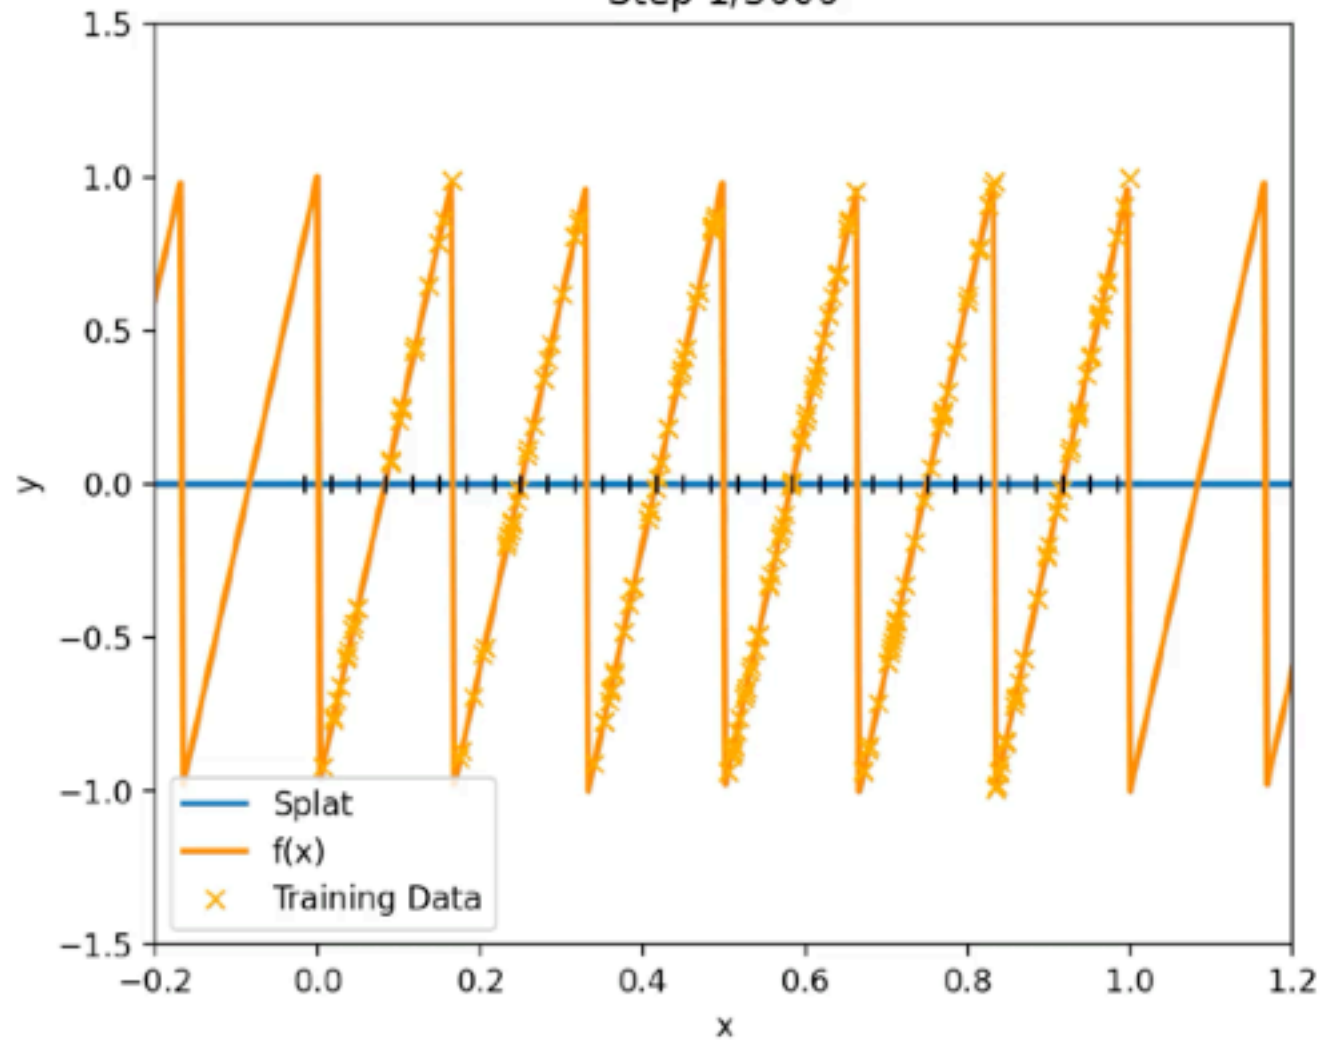


log(MSE)

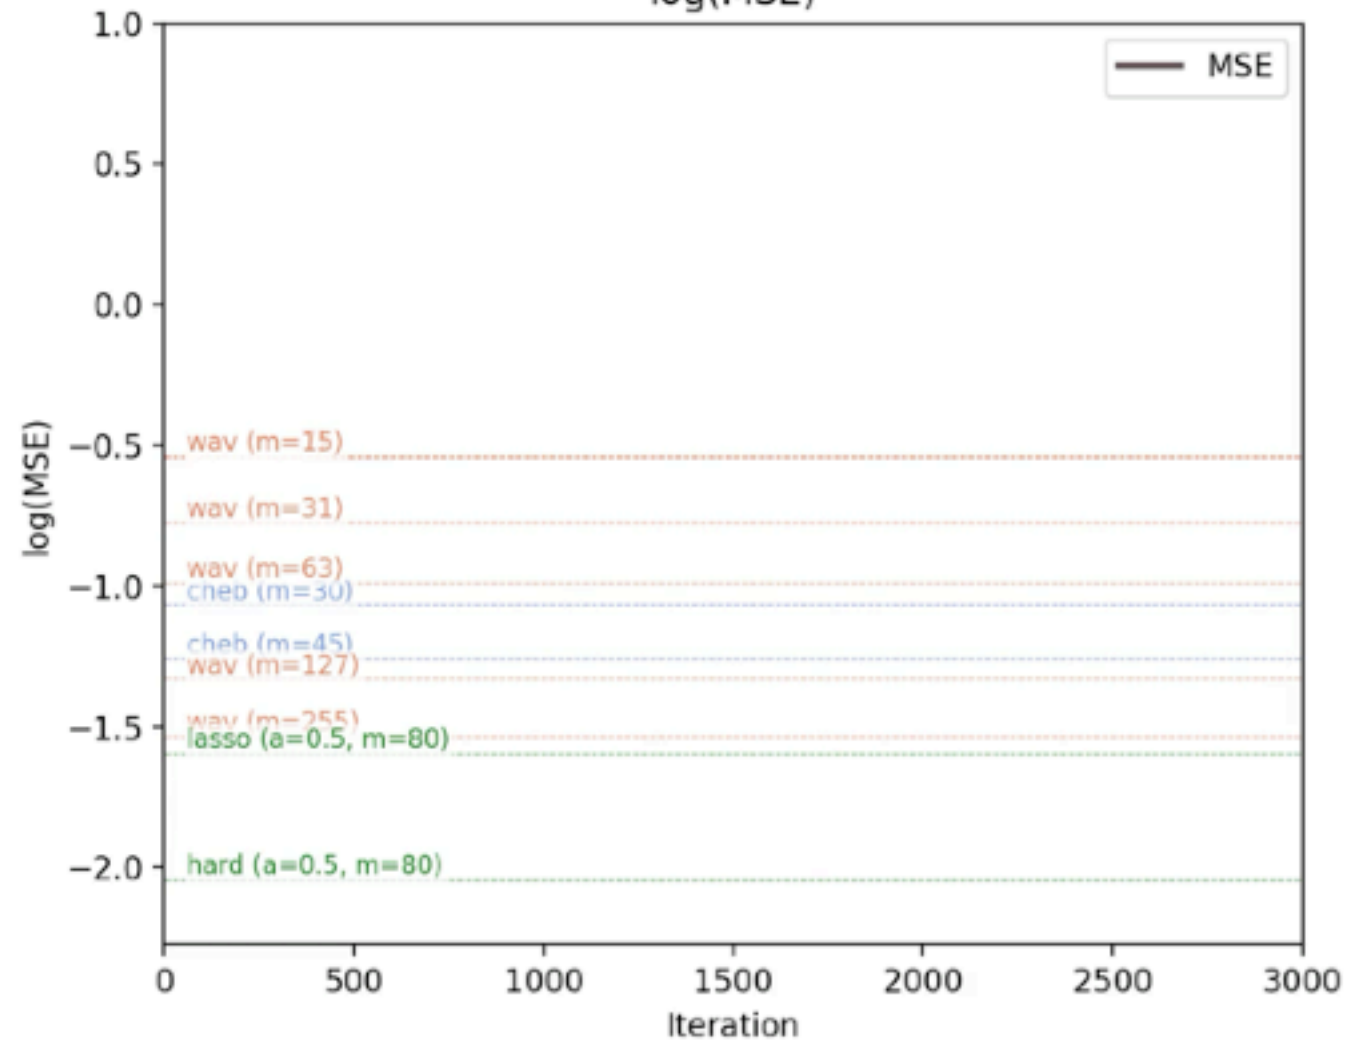



Step 1/3000

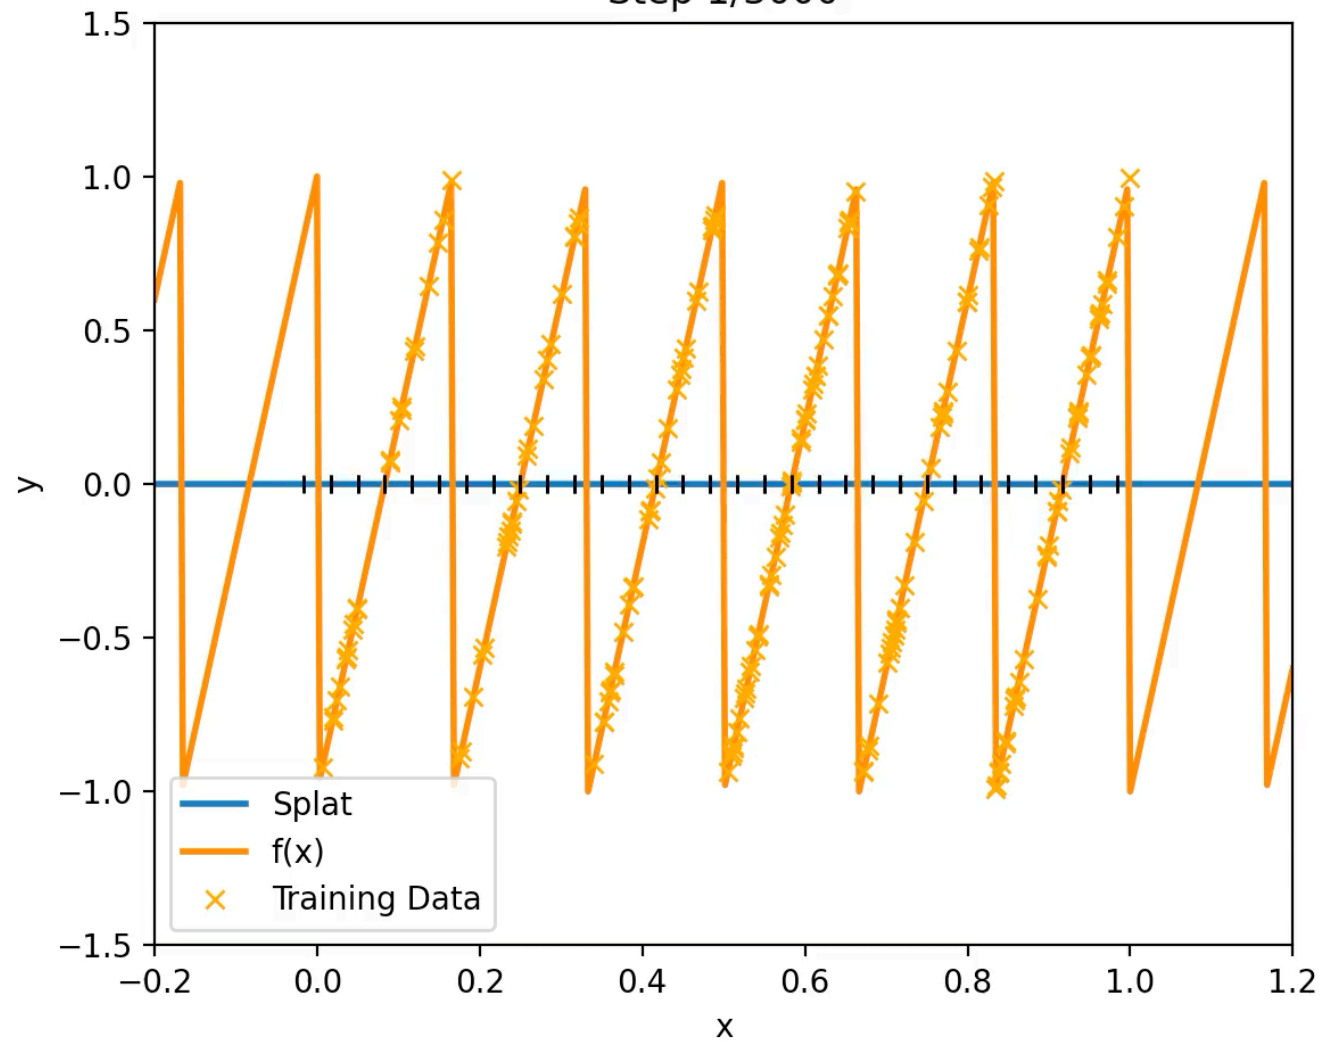

log(MSE)

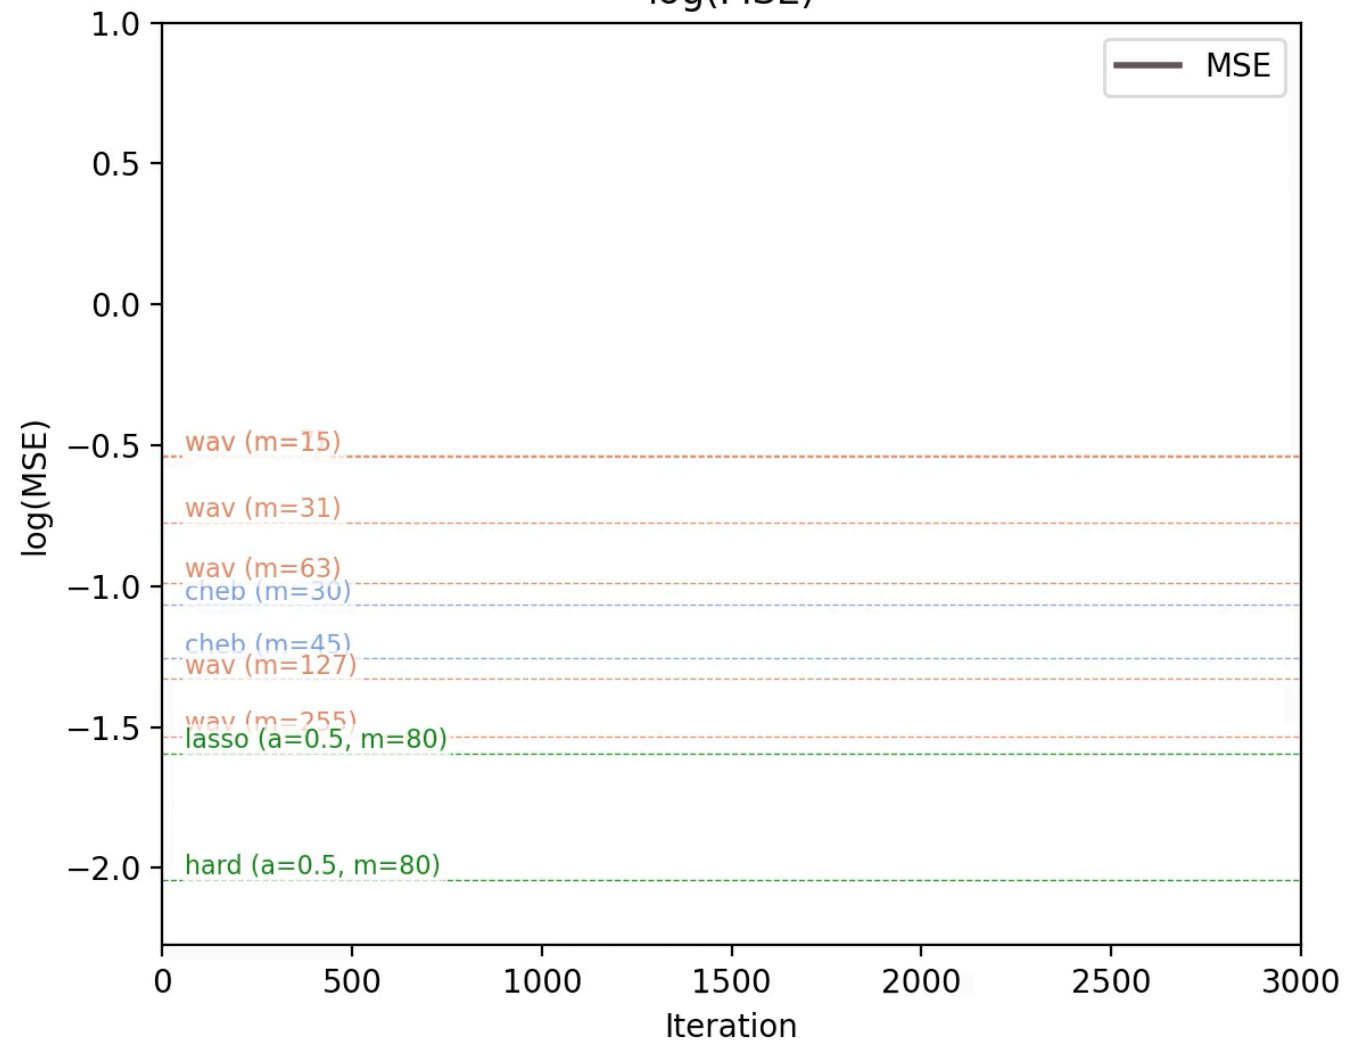


Experiments

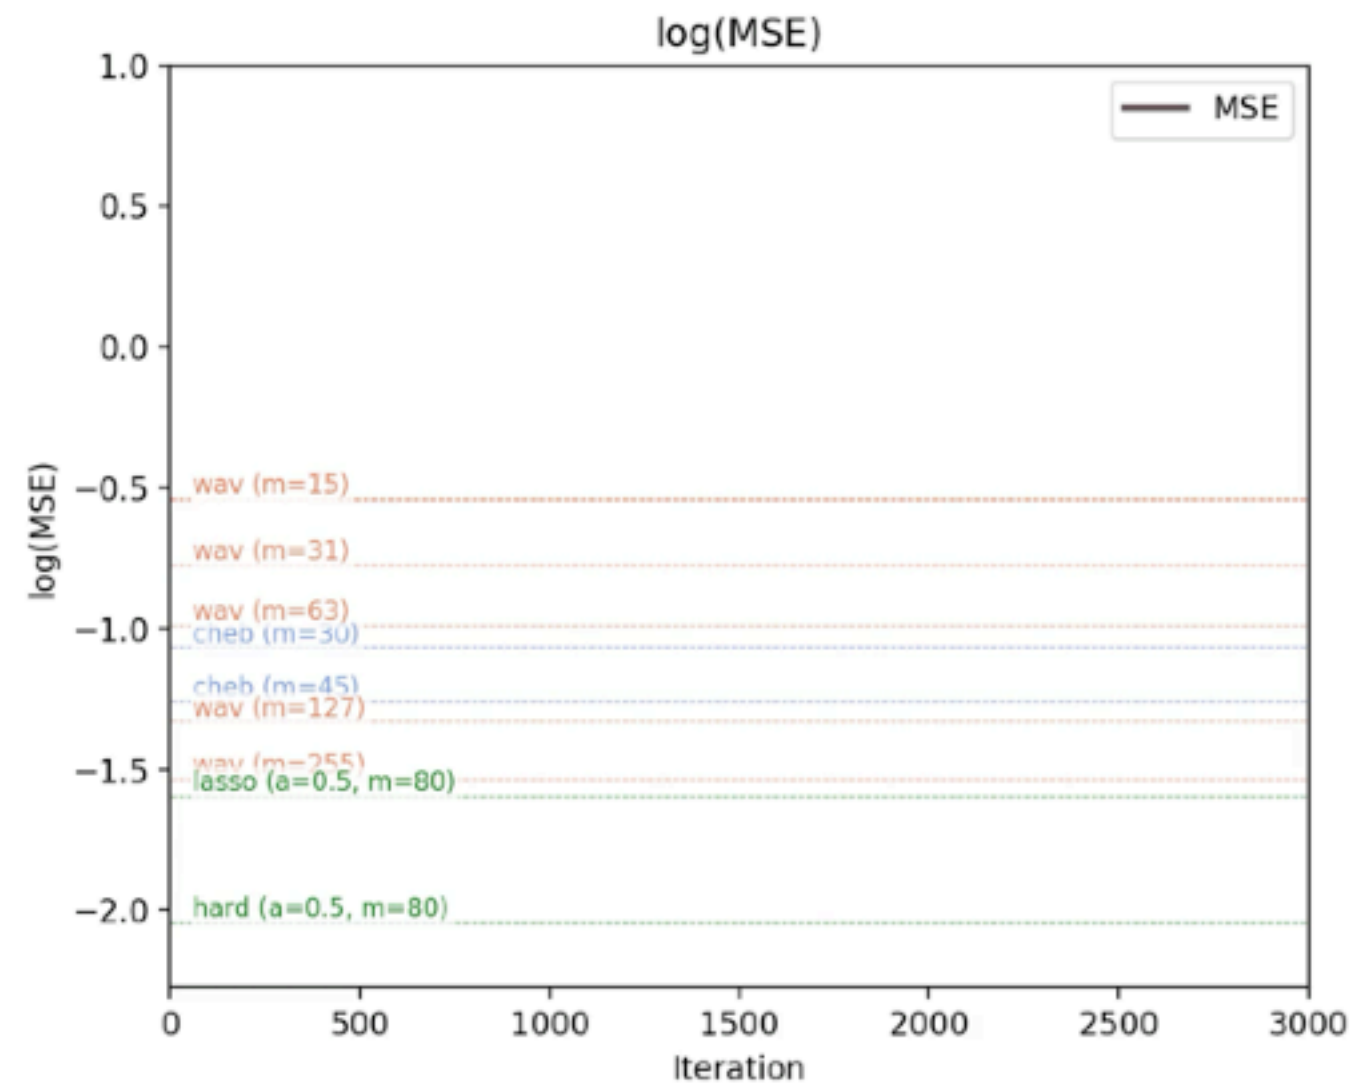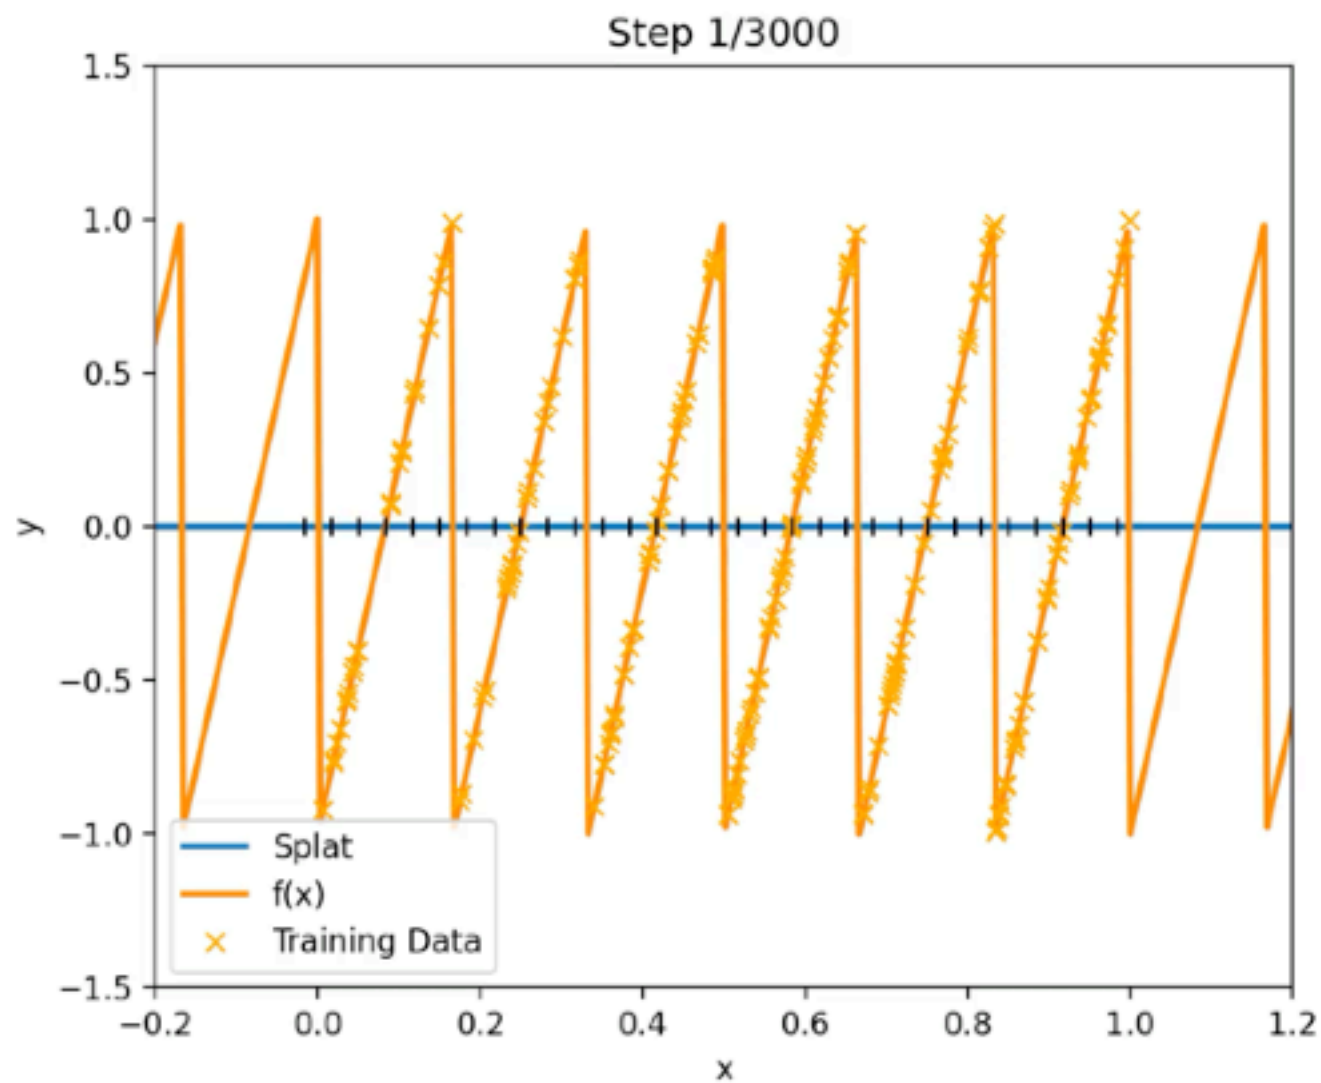

Noiseless regression: $y_i = 2(6x_i \bmod 1) - 1$, $x_i \sim \mathcal{U}([0,1])$ i.i.d. for $i = 1, \dots, 200$.

Experiments

Splat Function Training Progress

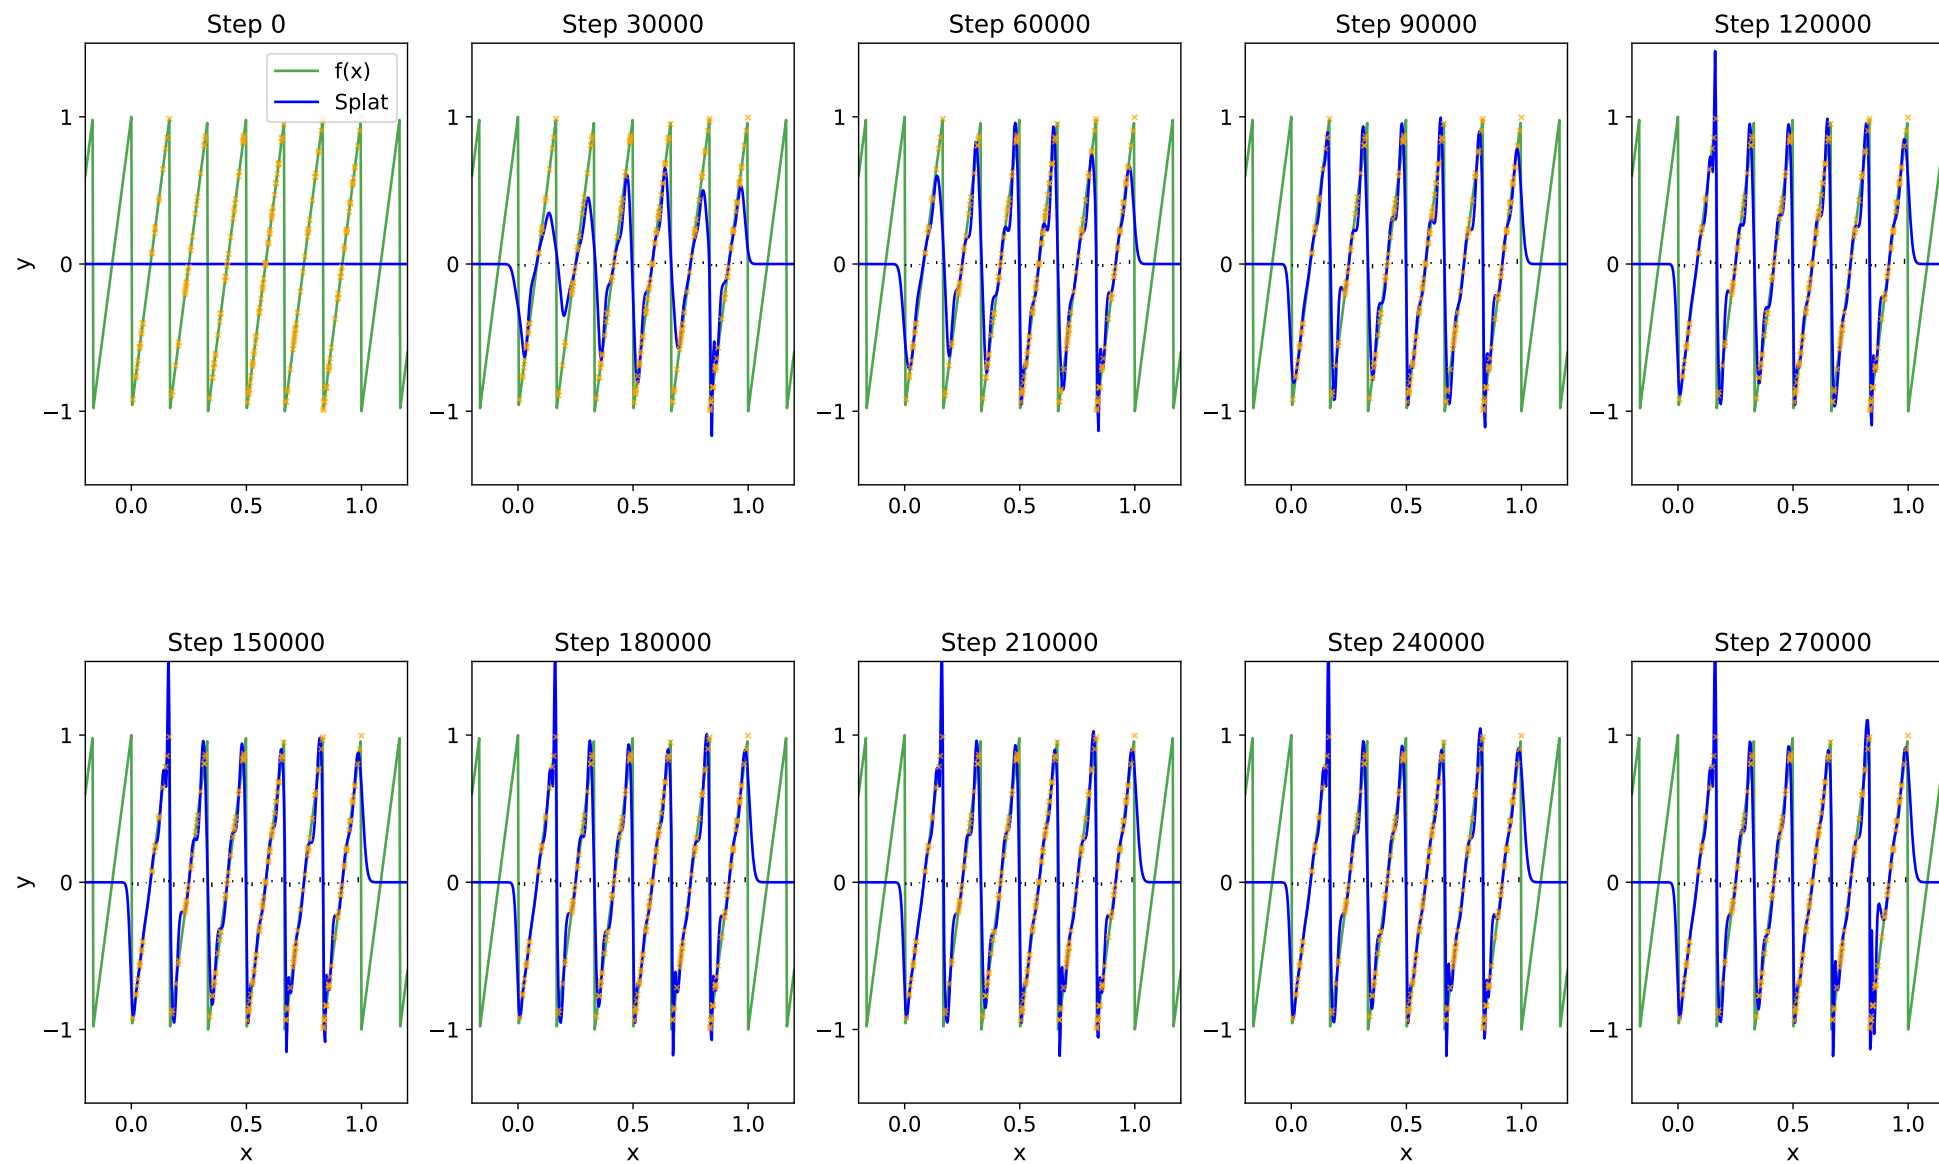

Training Progress

