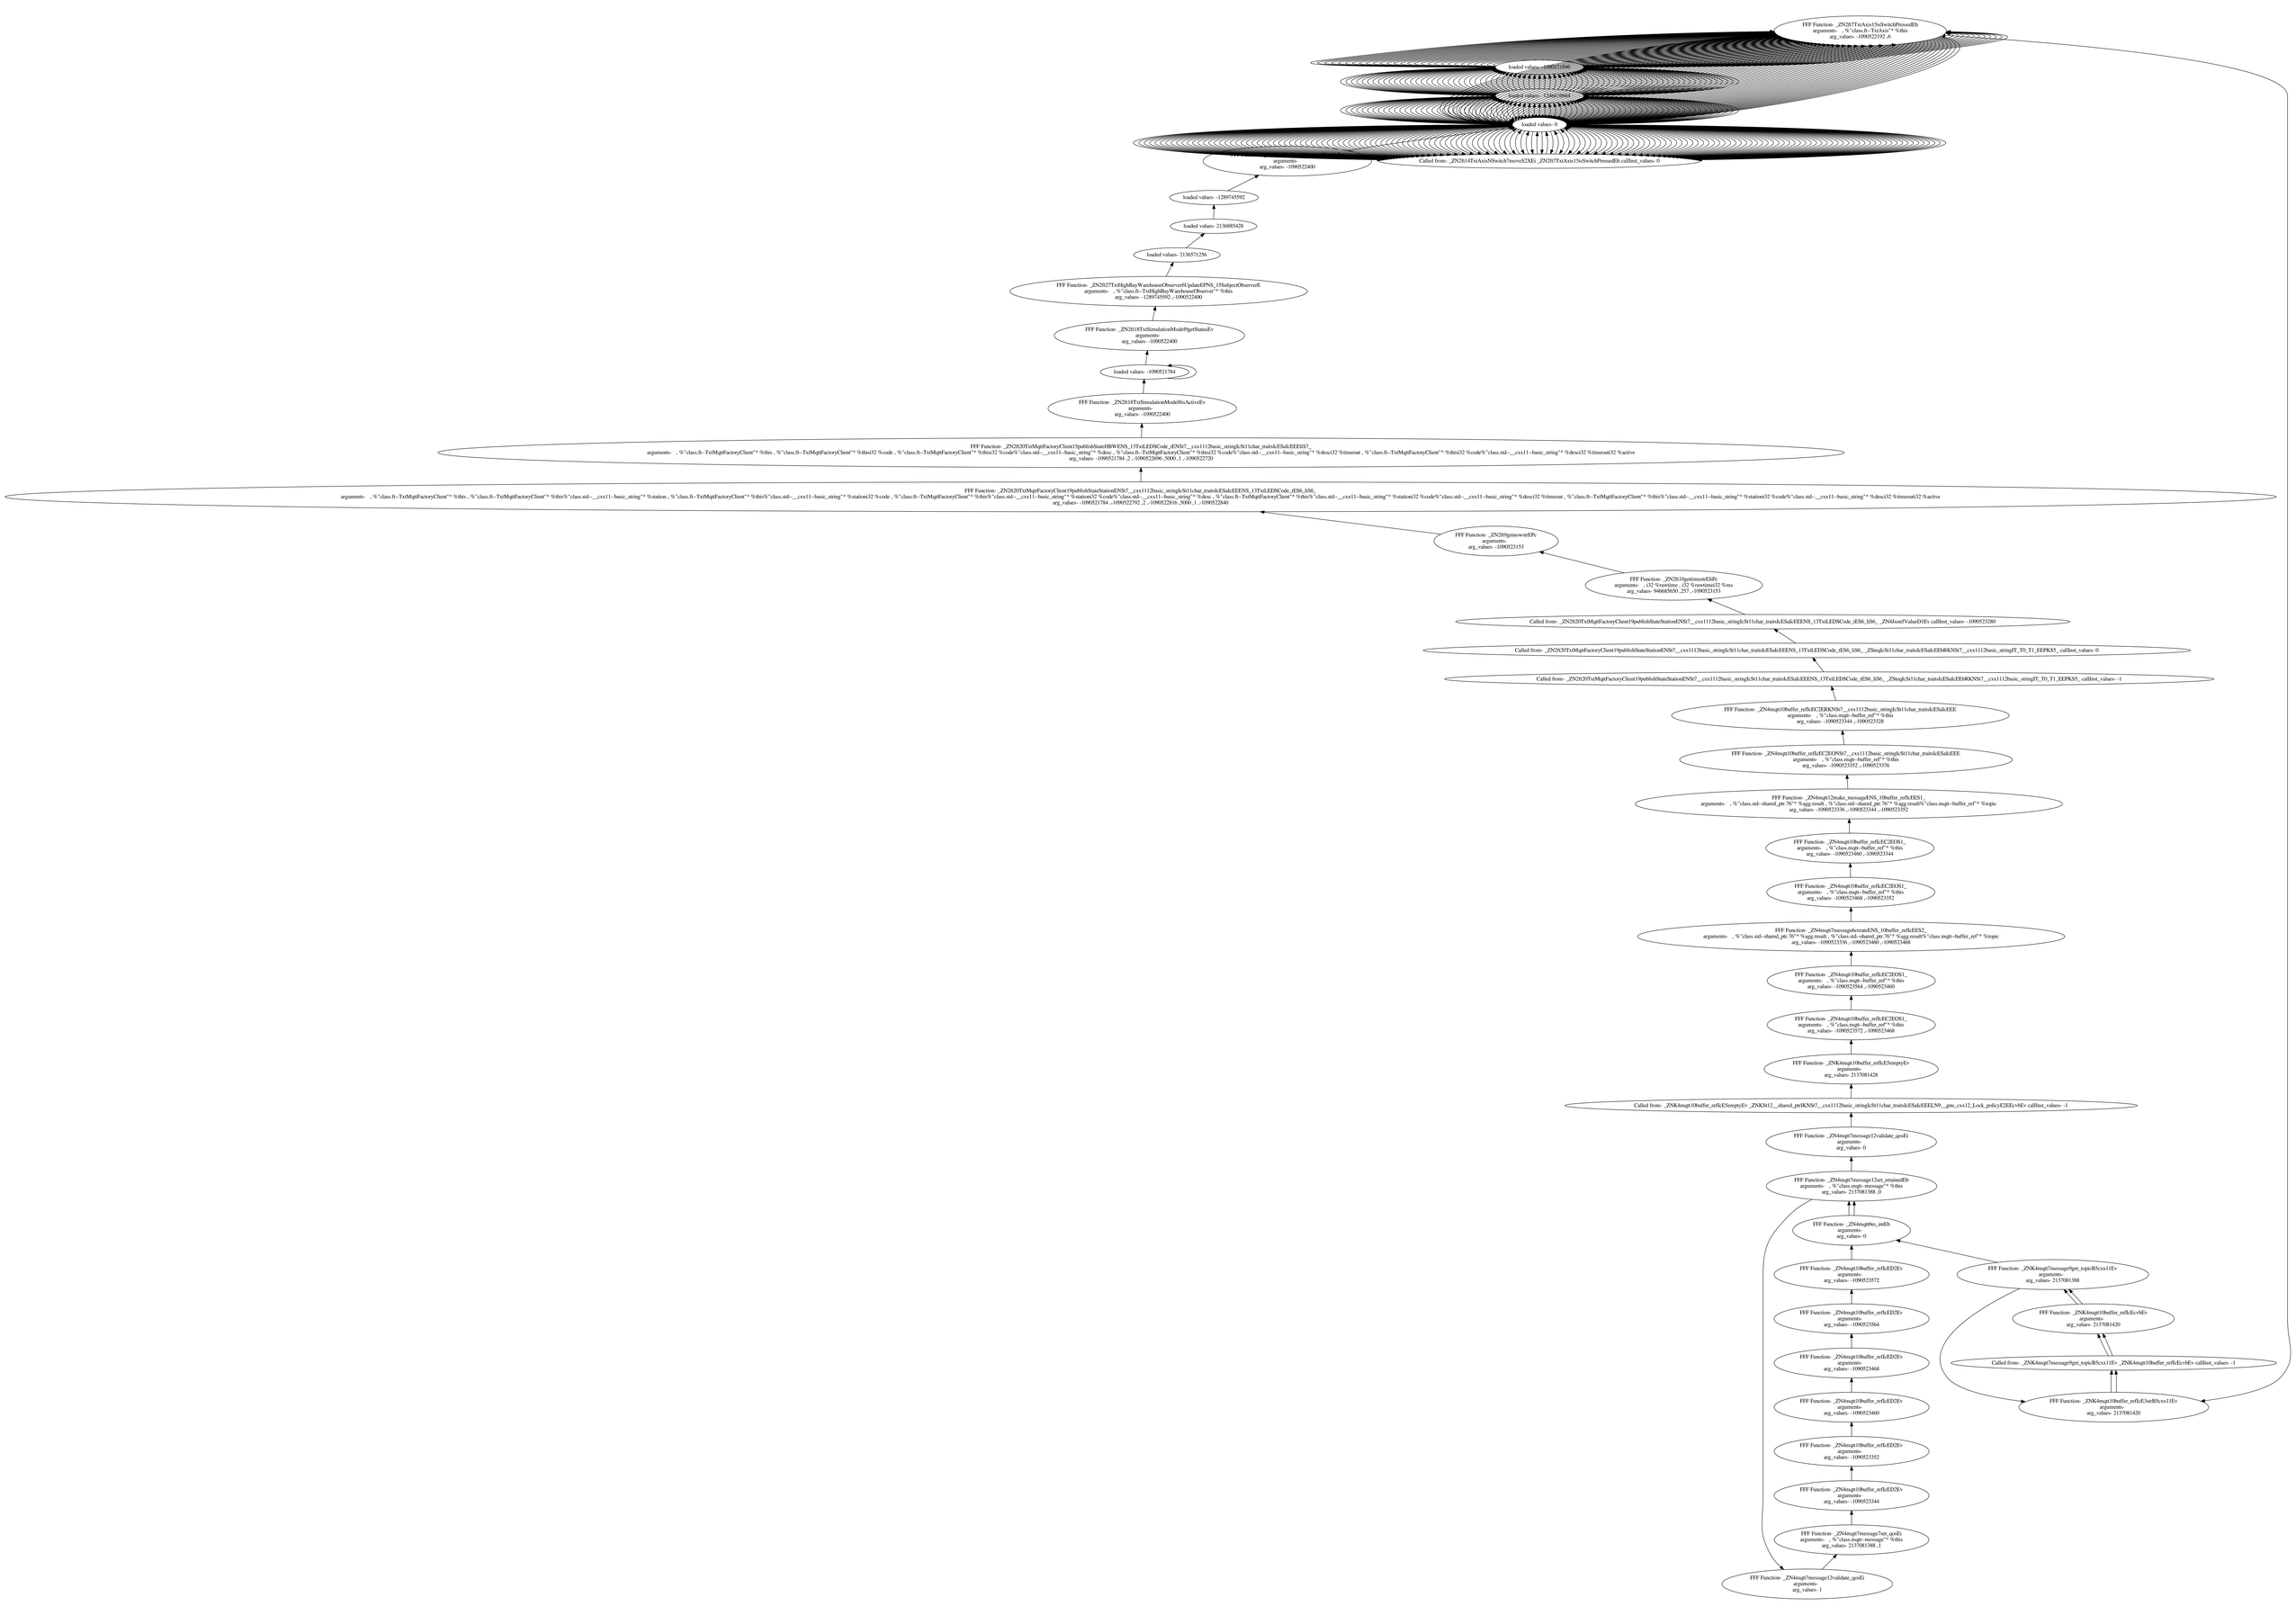
FFF Function: _ZN2027TxtAxis15SwitchPressedEb
arguments: , %"class.fb--TxtAxis"* %this
arg_values: -1090522192, fi
loaded values: -1090521984
loaded value: -1286139448
loaded values: 0
arguments:
arg_values: -1090522400
Called from: _ZN2814TxtAxisNSwitch7moveS2XEi _ZN2027TxtAxis15SwitchPressedEb callInst_values: 0
loaded values: -1289745592
loaded values: 2136885428
loaded values: 2136571256
FFF Function: _ZN2027TxtHighBayWarehouseObserver6UpdateEPNS_15SubjectObserverE
arguments: , %"class.fb--TxtHighBayWarehouseObserver"* %this
arg_values: -1289745592, -1090522400
FFF Function: _ZN2015TxtSimulationModel9getStatusEv
arguments:
arg_values: -1090522400
loaded values: -1090521784
FFF Function: _ZN2015TxtSimulationModel8IsActiveEv
arguments:
arg_values: -1090522400
FFF Function: _ZN2020TxtMqttFactoryClient15publishStateHBWENS_13TxtLEDSCode_tENS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEEIS7_
arguments: , %"class.fb--TxtMqttFactoryClient"* %this , %"class.fb--TxtMqttFactoryClient"* %this32 %code , %"class.fb--TxtMqttFactoryClient"* %this32 %code0{"class.std--___cxx11--basic_string"* %desc , %"class.fb--TxtMqttFactoryClient"* %this32 %code9{"class.std--___cxx11--basic_string"* %desc32 %timeout , %"class.fb--TxtMqttFactoryClient"* %this32 %code6{"class.std--___cxx11--basic_string"* %desc32 %timeout32 %active
arg_values: -1090521784 ,2 ,-1090522096 ,5000 ,1 ,-1090522720
FFF Function: _ZN2020TxtMqttFactoryClient19publishStateStationENS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEENS_13TxtLEDSCode_tES6_lS6_...
arguments: , %"class.fb--TxtMqttFactoryClient"* %this , %"class.fb--TxtMqttFactoryClient"* %this9{"class.std--___cxx11--basic_string"* %station , %"class.fb--TxtMqttFactoryClient"* %this6{"class.std--___cxx11--basic_string"* %station32 %code , %"class.fb--TxtMqttFactoryClient"* %this9{"class.std--___cxx11--basic_string"* %station32 %code9{"class.std--___cxx11--basic_string"* %desc , %"class.fb--TxtMqttFactoryClient"* %this9{"class.std--___cxx11--basic_string"* %station32 %code9{"class.std--___cxx11--basic_string"* %desc32 %timeout , %"class.fb--TxtMqttFactoryClient"* %this6{"class.std--___cxx11--basic_string"* %station32 %code6{"class.std--___cxx11--basic_string"* %desc32 %timeout32 %active
arg_values: -1090521784 ,-1090522792 ,2 ,-1090522816 ,5000 ,1 ,-1090522840
FFF Function: _ZN20JptmnostrEPc
arguments-
arg_values: -1090523153
FFF Function: _ZN20JptmnostrEIPc
arguments: , i32 %runtime , i32 %runtime32 %ms
arg_values: 946685650 ,257 ,-1090523153
Called from: _ZN2020TxtMqttFactoryClient19publishStateStationENS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEENS_13TxtLEDSCode_tES6_lS6_ _ZN4json5ValueD1Ev callInst_values: -1090523280
Called from: _ZN2020TxtMqttFactoryClient19publishStateStationENS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEENS_13TxtLEDSCode_tES6_lS6_ _ZNSoqIcSt11char_traitsIcESaIcEEI8RKNS7_...cxx1112basic_stringIT_T0_T1_EEPKS5_ callInst_values: 0
Called from: _ZN2020TxtMqttFactoryClient19publishStateStationENS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEENS_13TxtLEDSCode_tES6_lS6_ _ZNSoqIcSt11char_traitsIcESaIcEEI8RKNS7_...cxx1112basic_stringIT_T0_T1_EEPKS5_ callInst_values: -1
FFF Function: _ZN4mqtt10buffer_refIcEC2ERKNS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEE
arguments: , %"class.mqtt--buffer_ref"* %this
arg_values: -1090523344 ,-1090523328
FFF Function: _ZN4mqtt10buffer_refIcEC2EONS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEE
arguments: , %"class.mqtt--buffer_ref"* %this
arg_values: -1090523352 ,-1090523376
FFF Function: _ZN4mqtt12make_messageENS_10buffer_refIcEES1_
arguments: , %"class.std--shared_ptr.76"* %agg.result , %"class.std--shared_ptr.76"* %agg.result0{"class.mqtt--buffer_ref"* %topic
arg_values: -1090523336 , -1090523344 , -1090523352
FFF Function: _ZN4mqtt10buffer_refIcEC2EOS1_
arguments: , %"class.mqtt--buffer_ref"* %this
arg_values: -1090523400 ,-1090523344
FFF Function: _ZN4mqtt10buffer_refIcEC2EOS1_
arguments: , %"class.mqtt--buffer_ref"* %this
arg_values: -1090523468 ,-1090523352
FFF Function: _ZN4mqtt7message6createENS_10buffer_refIcEES2_
arguments: , %"class.std--shared_ptr.76"* %agg.result , %"class.std--shared_ptr.76"* %agg.result0{"class.mqtt--buffer_ref"* %topic
arg_values: -1090523536 , -1090523400 , -1090523468
FFF Function: _ZN4mqtt10buffer_refIcEC2EOS1_
arguments: , %"class.mqtt--buffer_ref"* %this
arg_values: -1090523564 ,-1090523460
FFF Function: _ZN4mqtt10buffer_refIcEC2EOS1_
arguments: , %"class.mqtt--buffer_ref"* %this
arg_values: -1090523572 ,-1090523468
FFF Function: _ZNK4mqtt10buffer_refIcE5emptyEv
arguments:
arg_values: 2137081428
Called from: _ZNK4mqtt10buffer_refIcE5emptyEv _ZNKSt12__shared_ptrIKNS7_...cxx1112basic_stringIcSt11char_traitsIcESaIcEEELN9__gnu_cxx12_Lock_policyE2EEcvbEv callInst_values: -1
FFF Function: _ZN4mqtt7message12validate_qosEi
arguments:
arg_values: 0
FFF Function: _ZN4mqtt7message12set_retainedEb
arguments: , %"class.mqtt--message"* %this
arg_values: 2137081388 ,0
FFF Function: _ZN4mqtt8to_intEb
arguments:
arg_values: 0
FFF Function: _ZN4mqtt10buffer_refIcED2Ev
arguments:
arg_values: -1090523572
FFF Function: _ZN4mqtt10buffer_refIcED2Ev
arguments:
arg_values: -1090523564
FFF Function: _ZN4mqtt10buffer_refIcED2Ev
arguments:
arg_values: -1090523468
FFF Function: _ZN4mqtt10buffer_refIcED2Ev
arguments:
arg_values: -1090523460
FFF Function: _ZN4mqtt10buffer_refIcED2Ev
arguments:
arg_values: -1090523352
FFF Function: _ZN4mqtt10buffer_refIcED2Ev
arguments:
arg_values: -1090523344
FFF Function: _ZN4mqtt7message7set_qosEi
arguments: , %"class.mqtt--message"* %this
arg_values: 2137081388 ,1
FFF Function: _ZN4mqtt7message12validate_qosEi
arguments:
arg_values: 1
FFF Function: _ZNK4mqtt7message9get_topicB5cxx11Ev
arguments:
arg_values: 2137081388
FFF Function: _ZNK4mqtt10buffer_refIcEcvbEv
arguments:
arg_values: 2137081420
Called from: _ZNK4mqtt7message9get_topicB5cxx11Ev _ZNK4mqtt10buffer_refIcEcvbEv callInst_values: -1
FFF Function: _ZNK4mqtt10buffer_refIcE3strB5cxx11Ev
arguments:
arg_values: 2137081420