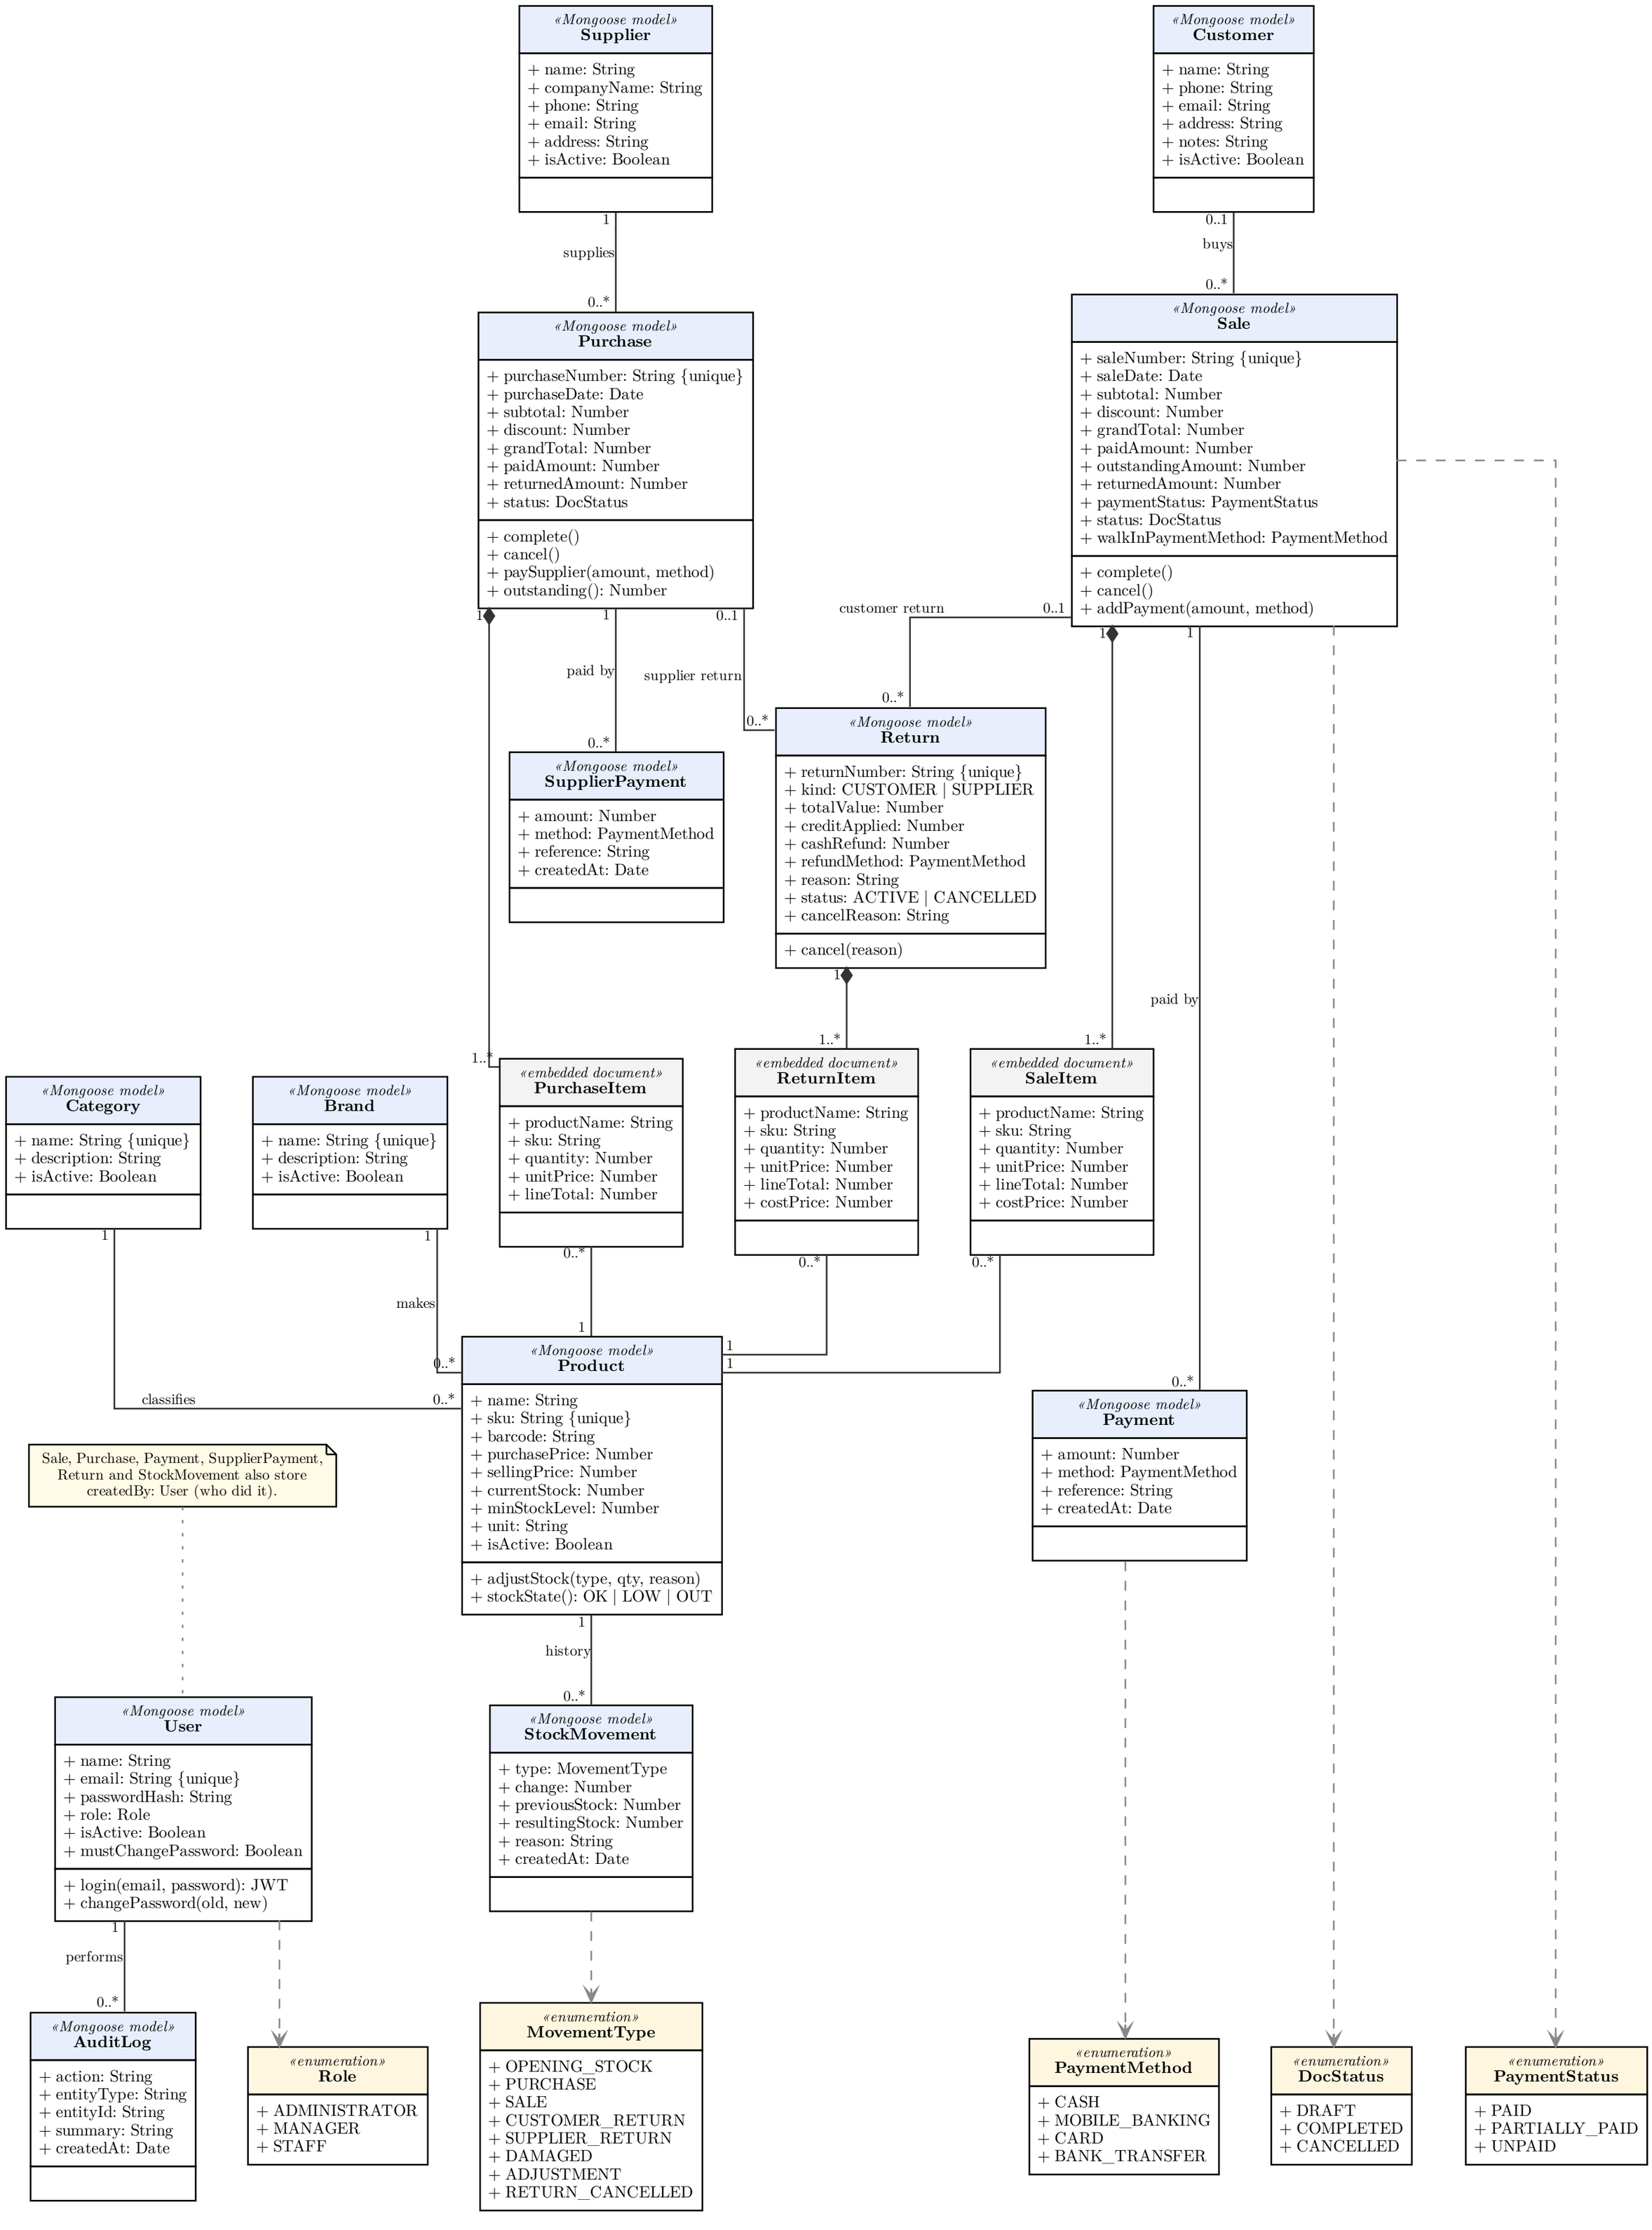
«Mongoose model»
Supplier
+ name: String
+ companyName: String
+ phone: String
+ email: String
+ address: String
+ isActive: Boolean
1
supplies
0..*
«Mongoose model»
Purchase
+ purchaseNumber: String {unique}
+ purchaseDate: Date
+ subtotal: Number
+ discount: Number
+ grandTotal: Number
+ paidAmount: Number
+ returnedAmount: Number
+ status: DocStatus
+ complete()
+ cancel()
+ paySupplier(amount, method)
+ outstanding(): Number
1
1
paid by
0..*
«Mongoose model»
SupplierPayment
+ amount: Number
+ method: PaymentMethod
+ reference: String
+ createdAt: Date
0..1
supplier return
0..*
«Mongoose model»
Return
+ returnNumber: String {unique}
+ kind: CUSTOMER | SUPPLIER
+ totalValue: Number
+ creditApplied: Number
+ cashRefund: Number
+ refundMethod: PaymentMethod
+ reason: String
+ status: ACTIVE | CANCELLED
+ cancelReason: String
+ cancel(reason)
1
1..*
«embedded document»
ReturnItem
+ productName: String
+ sku: String
+ quantity: Number
+ unitPrice: Number
+ lineTotal: Number
+ costPrice: Number
0..*
«Mongoose model»
Customer
+ name: String
+ phone: String
+ email: String
+ address: String
+ notes: String
+ isActive: Boolean
0..1
buys
0..*
«Mongoose model»
Sale
+ saleNumber: String {unique}
+ saleDate: Date
+ subtotal: Number
+ discount: Number
+ grandTotal: Number
+ paidAmount: Number
+ outstandingAmount: Number
+ returnedAmount: Number
+ paymentStatus: PaymentStatus
+ status: DocStatus
+ walkInPaymentMethod: PaymentMethod
+ complete()
+ cancel()
+ addPayment(amount, method)
customer return
0..1
0..*
1
1
paid by
1..*
«embedded document»
SaleItem
+ productName: String
+ sku: String
+ quantity: Number
+ unitPrice: Number
+ lineTotal: Number
+ costPrice: Number
0..*
1..*
«embedded document»
PurchaseItem
+ productName: String
+ sku: String
+ quantity: Number
+ unitPrice: Number
+ lineTotal: Number
0..*
«Mongoose model»
Category
+ name: String {unique}
+ description: String
+ isActive: Boolean
1
classifies
0..*
«Mongoose model»
Brand
+ name: String {unique}
+ description: String
+ isActive: Boolean
1
makes
0..*
«Mongoose model»
Product
+ name: String
+ sku: String {unique}
+ barcode: String
+ purchasePrice: Number
+ sellingPrice: Number
+ currentStock: Number
+ minStockLevel: Number
+ unit: String
+ isActive: Boolean
+ adjustStock(type, qty, reason)
+ stockState(): OK | LOW | OUT
1
1
1
history
0..*
«Mongoose model»
Payment
+ amount: Number
+ method: PaymentMethod
+ reference: String
+ createdAt: Date
0..*
Sale, Purchase, Payment, SupplierPayment, Return and StockMovement also store createdBy: User (who did it).
«Mongoose model»
User
+ name: String
+ email: String {unique}
+ passwordHash: String
+ role: Role
+ isActive: Boolean
+ mustChangePassword: Boolean
+ login(email, password): JWT
+ changePassword(old, new)
1
performs
0..*
«Mongoose model»
AuditLog
+ action: String
+ entityType: String
+ entityId: String
+ summary: String
+ createdAt: Date
«enumeration»
Role
+ ADMINISTRATOR
+ MANAGER
+ STAFF
«Mongoose model»
StockMovement
+ type: MovementType
+ change: Number
+ previousStock: Number
+ resultingStock: Number
+ reason: String
+ createdAt: Date
«enumeration»
MovementType
+ OPENING_STOCK
+ PURCHASE
+ SALE
+ CUSTOMER_RETURN
+ SUPPLIER_RETURN
+ DAMAGED
+ ADJUSTMENT
+ RETURN_CANCELLED
«enumeration»
PaymentMethod
+ CASH
+ MOBILE_BANKING
+ CARD
+ BANK_TRANSFER
«enumeration»
DocStatus
+ DRAFT
+ COMPLETED
+ CANCELLED
«enumeration»
PaymentStatus
+ PAID
+ PARTIALLY_PAID
+ UNPAID