AWS EC2-TASK-1

Create a Jira ticket for this assignment, work on the tasks listed below, and submit the task completion document by EOD with clear steps and required evidence (outputs/screenshots)

Launch one EC2 using Amazon Linux 2 image and add a script in user data to install Apache.

Launch one EC2 using Ubuntu image and add a script in user data to install Nginx.

Launch one Windows server and install Tomcat on Windows.

Take a snapshot of the instance created in Task 1.

Assign passwordless authentication for the EC2 created in Task 2.


Launch any EC2 using the spot purchasing option.

Enable termination policy on the EC2 created in Task 2.

Launch one EC2 using AWS CLI.

Launch one EC2 using Amazon Linux 2 image and add a script in user data to install Apache.

Here I have Launch an Amazon Linux 2 instance and automatically install Apache using User Data.
Steps:
Navigate the Amazon EC2 Console and click Launch instance.
Name: Web-Server-AmazonLinux
AMI: Select Amazon Linux 2 (HVM, SSD Volume Type).
Instance Type: t2.micro
Network Settings: Configure Security Group to allow HTTP (Port 80) and SSH (Port 22).
Expand Advanced details, scroll to User data, and paste the script:

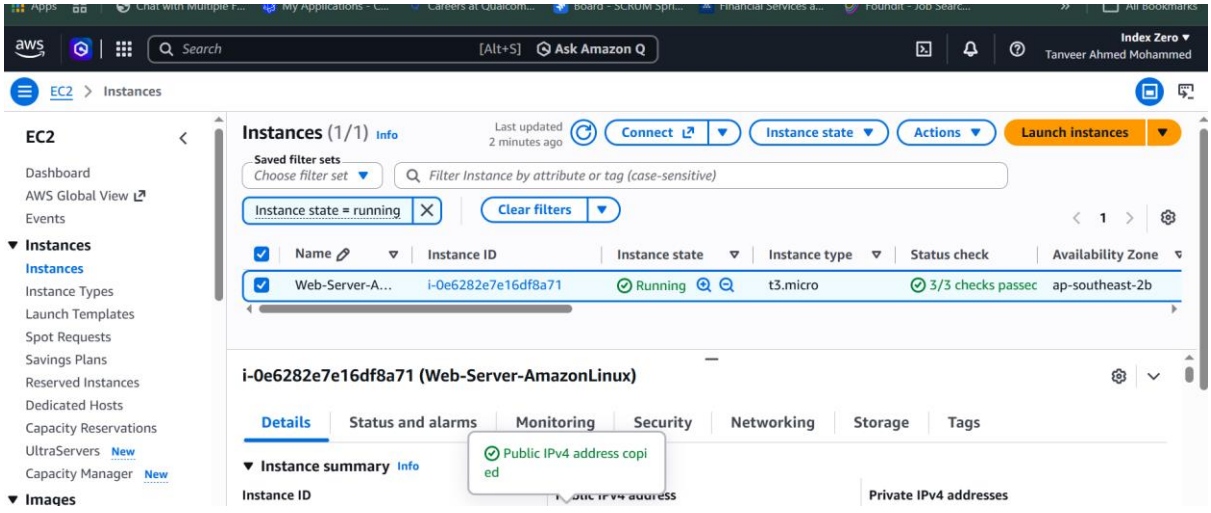



```
#!/bin/bash
yum update -y
```

yum install -y httpd
systemctl start httpd
systemctl enable httpd
echo "<h1>Hello welcome to my dell Ec2 from Amazon Linux 2 Apache Server</h1>" > /var/www/html/index.html
Check the Security Ports and save and click Launch Instance.
And check the page is displayed or not using Public IP Address and port.




2)Launch one EC2 using Ubuntu image and add a script in user data to install Nginx.

Steps:
Click Launch instance in the EC2 Console.
Name: Web-Server-Ubuntu
AMI: Select Ubuntu Server (22.04 LTS or 24.04 LTS).
Instance Type: t2.micro
Network Settings: Allow HTTP (Port 80) and SSH (Port 22).
Expand Advanced details -> User data:
#!/bin/bash
apt-get update -y
apt-get install -y nginx
systemctl start nginx
systemctl enable nginx
echo "<h1>Hello from Ubuntu Nginx Server</h1>" > /var/www/html/index.html
Check the security groups bounds and Lauch instance.

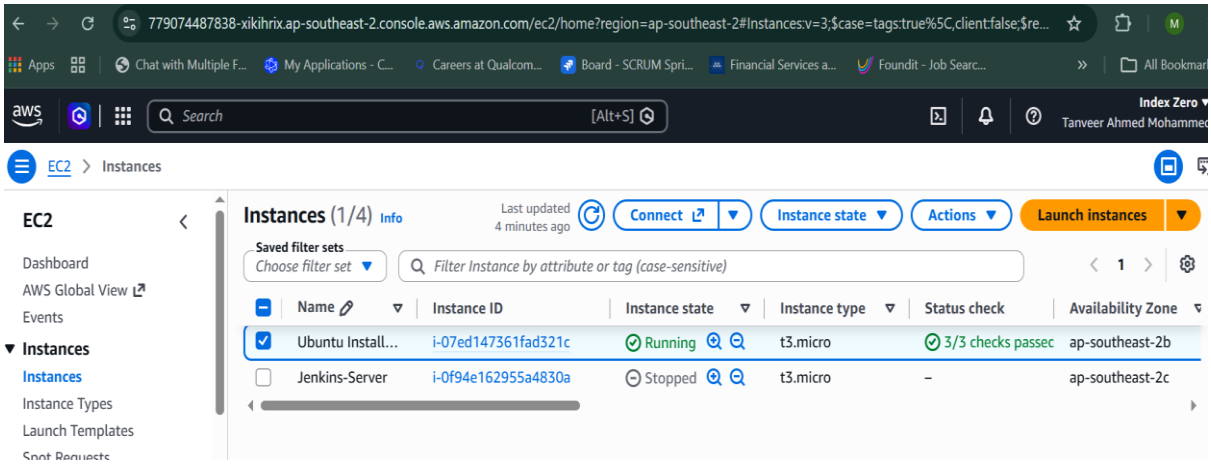

```
ubuntu@ip-172-31-38-90:~$ systemctl status nginx
● nginx.service - A high performance web server and a reverse proxy server
     Loaded: loaded (/usr/lib/systemd/system/nginx.service; enabled; preset: en>
     Active: active (running) since Wed 2026-10-28 14:04:36 UTC; 32min ago
 Invocation: 7d2ba6be5a754c529ee272392558a14b
       Docs: man:nginx(8)
   Main PID: 1459 (nginx)
      Tasks: 3 (limit: 627)
     Memory: 3.1M (peak: 7.3M)
        CPU: 48ms
     CGroup: /system.slice/nginx.service
             ├─1459 "nginx: master process /usr/sbin/nginx -g daemon on; master>
             ├─1461 "nginx: worker process"
             └─1462 "nginx: worker process"

Oct 28 14:04:36 ip-172-31-38-90 systemd[1]: Starting nginx.service - A high per>
Oct 28 14:04:36 ip-172-31-38-90 systemd[1]: Started nginx.service - A high perf>
ubuntu@ip-172-31-38-90:~$ sudo
```



Welcome to Dell from Ubuntu Nginx Server


3) Launch one Windows server and install Tomcat on Windows.

Step-by-Step Documentation: Launching a Remote Windows Instance & Installing Apache Tomcat

Phase 1: Launching a Windows EC2 Instance on AWS

Step 1: Configure Instance Launch Settings


- **Action:** Navigate to the AWS EC2 Console and click **Launch Instance**.
- **Configuration Details (as seen in Screenshot 390):**
  - **Name/OS Image (AMI):** Microsoft Windows Server 2025 Base (64-bit x86).
  - **Virtual Server Type (Instance Type):** t3.micro (Free tier eligible).
  - **Firewall (Security Group):** Create a new security group allowing RDP access.
- **Command / Action:** Click **Launch instance** to spin up the virtual machine.

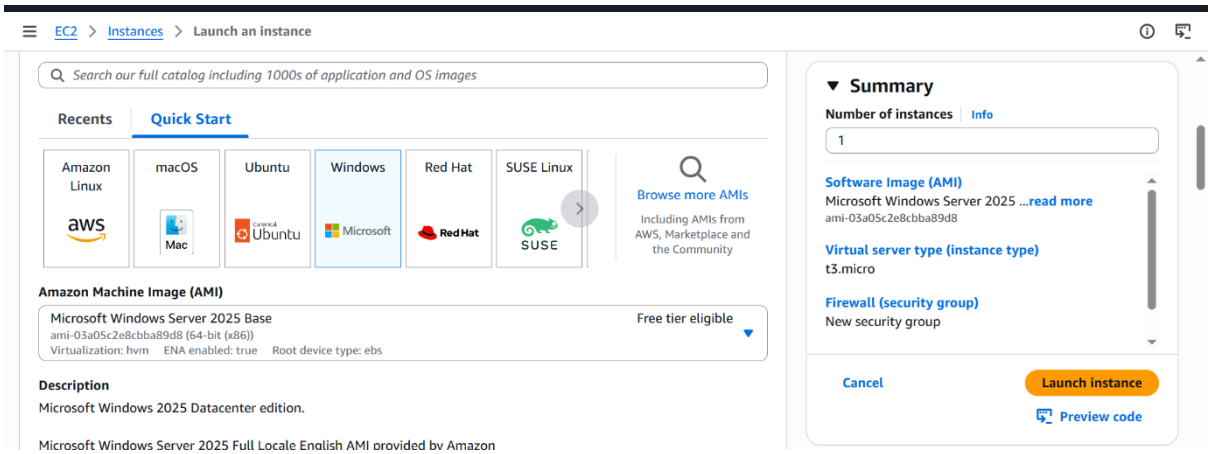

Phase 2: Connecting to the Remote Windows Instance


Step 2: Retrieve the Windows Administrator Password

- **Action:** Select your newly launched instance (i-0612684543ccadce5 / Windows-Tomcat-Server) in the EC2 Console and click **Connect** -> **RDP client** -> **Get Windows password**.
    - **Instance ID:** i-0612684543ccadce5
    - **Username:** Administrator
    - **Password:** Decrypted using your private .pem key file.

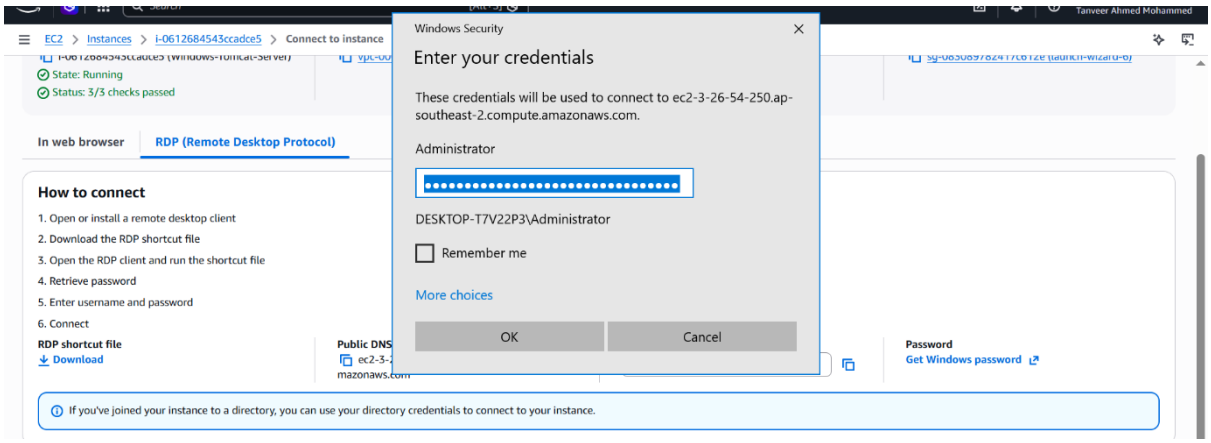

Step 3: Establish a Remote Desktop Connection (RDP)


- **Action:** Download the RDP shortcut file from the AWS console, open it, and enter your credentials.
- **Details**
    - **Computer Address:** ec2-3-26-54-250.ap-southeast-2.compute.amazonaws.com (example public DNS).
    - **Credentials:** Enter Administrator and the decrypted password when prompted by Windows Security.
    - **Certificate Warning:** Click **Yes** to bypass the self-signed certificate warning and establish the remote session.

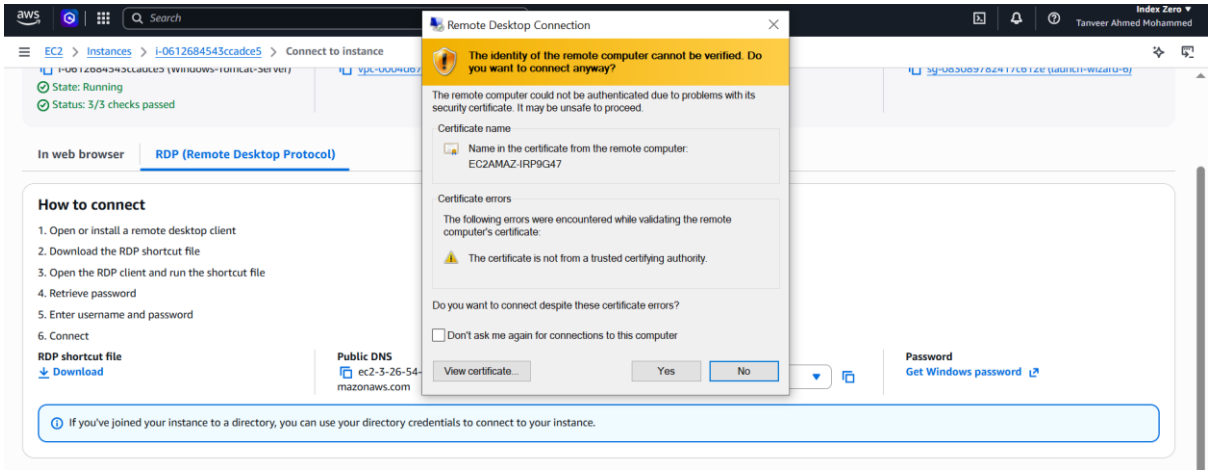

Phase 3: Setting up the Remote Desktop Environment

Step 4: Access the Remote Windows Desktop

- **Action:** Once connected, you will be greeted by the default Windows Server 2025 desktop environment.
- **Details** You have full remote administrative access via Remote Desktop Protocol (RDP). Open **PowerShell** as Administrator to run the installation script.

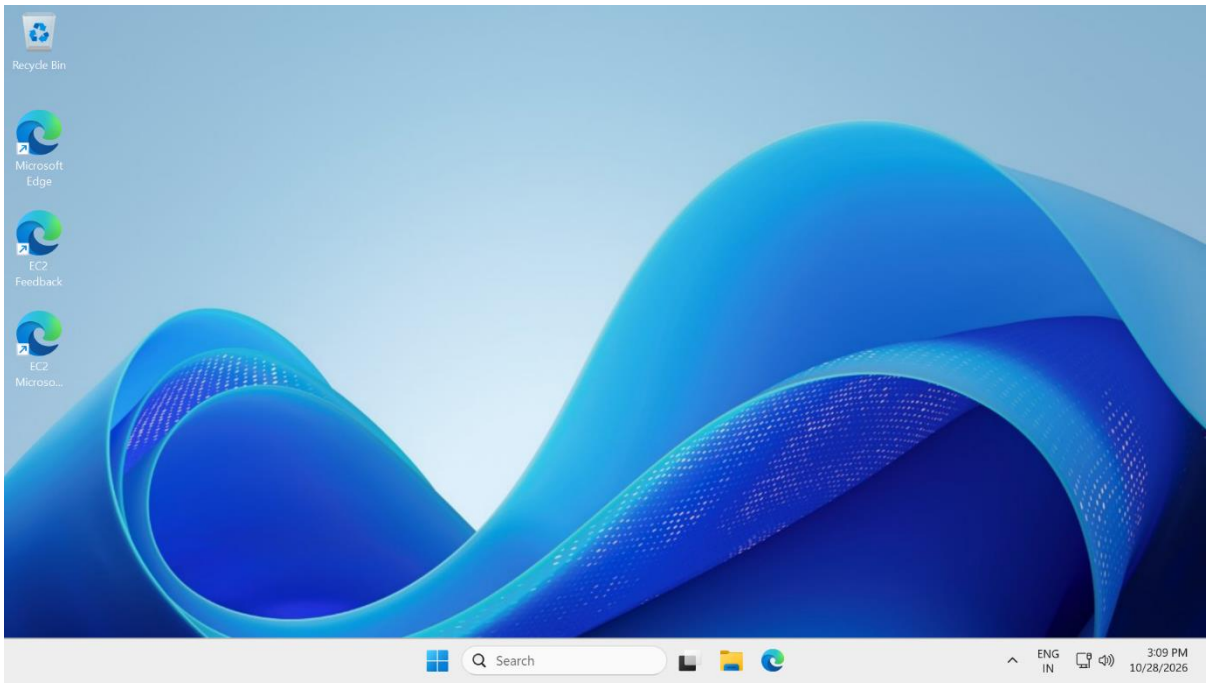

Phase 4: Installing Java and Apache Tomcat via PowerShell

Step 5: Define Variables and Download Tomcat

- **Description:** Set up version variables and fetch the Tomcat archive directly from the Apache archive server.
- **Commands:**

$TomcatVersion = "10.1.24" # Update to latest stable if needed

$DownloadUrl = "https://archive.apache.org/dist/tomcat/tomcat-10/v$TomcatVersion/bin/apache-tomcat-$TomcatVersion-windows-x64.zip"

$InstallPath = "C:\Tomcat"

Download Tomcat Zip

Invoke-WebRequest -Uri $DownloadUrl -OutFile "C:\tomcat.zip"

Step 6: Extract and Rename the Tomcat Directory

- **Description:** Extract the downloaded ZIP archive to the root C:\ drive and rename the folder to a clean directory name (C:\Tomcat).

- **Commands:**

Extract archive

Expand-Archive -Path "C:\tomcat.zip" -DestinationPath "C:\"

Rename-Item -Path "C:\apache-tomcat-$TomcatVersion" -NewName "Tomcat"

Step 7: Install Java (Temurin JDK 17) via Winget

- **Description:** Tomcat requires a Java Development Kit (JDK) to execute servlets. Install Eclipse Temurin JDK 17 using the Windows Package Manager (winget).
- **Command:**

winget install EclipseAdoptium.Temurin.17.JDK –source winget

Step 8: Configure JAVA_HOME Environment Variable

- **Description:** Dynamically locate the installed JDK directory path and assign it to the session's JAVA_HOME environment variable.
- **Commands:**

1. Find and set JAVA_HOME automatically for this session

$javaDir = Get-ChildItem "C:\Program Files\Eclipse Adoptium\" | Select-Object -First 1

$env:JAVA_HOME = $javaDir.FullName

Step 9: Start the Tomcat Server

- **Description:** Navigate into the Tomcat binary directory and execute the startup script.
- **Commands:**

2. Start Tomcat again


cd "$InstallPath\bin"

.\startup.bat

Phase 5: Verifying the Installation

Step 10: Access the Tomcat Web Interface


- **Action:** Open Microsoft Edge inside your remote Windows session and navigate to the local server address.
- **URL:** http://localhost:8080
- **On the Page the Apache Tomcat/10.1.24 homepage displaying the message:** ***"If you're seeing this, you've successfully installed Tomcat. Congratulations!***

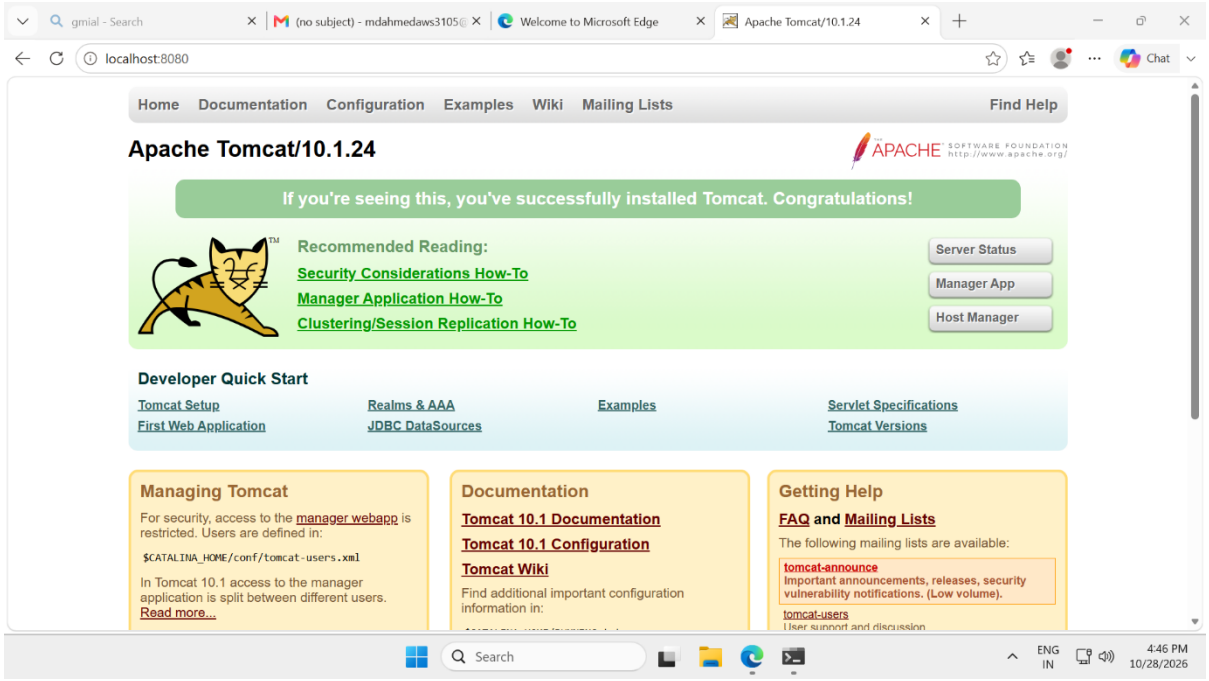



4)Take a snapshot of the instance created in Task 1.


Step-by-Step Guide

1. **Locate the Root Volume:**
    - **Open the Amazon EC2 Console and click on Instances.**
    - **Select your Amazon Linux instance (Web-Server-AmazonLinux).**
    - **In the lower details pane, click on the Storage tab.**
    - **Look for the Root device name and click on the associated Volume ID (it starts with vol-). This will open the EBS Volumes console.**
2. **Create the Snapshot:**
    - **With your root volume selected in the Volumes list, click the Actions dropdown at the top right.**
    - **Select Create snapshot.**
    - **Give it a description, such as: Root volume snapshot for Web-Server-AmazonLinux - Task 4.**
    - **Click Create snapshot.**
3. **Verify the Snapshot:**
    - **In the left-hand navigation menu of the EC2 console, go to Elastic Block Store -> Snapshots.**
    - **Locate your snapshot and check its State. Once it changes from pending to completed, your backup is successfully saved!**

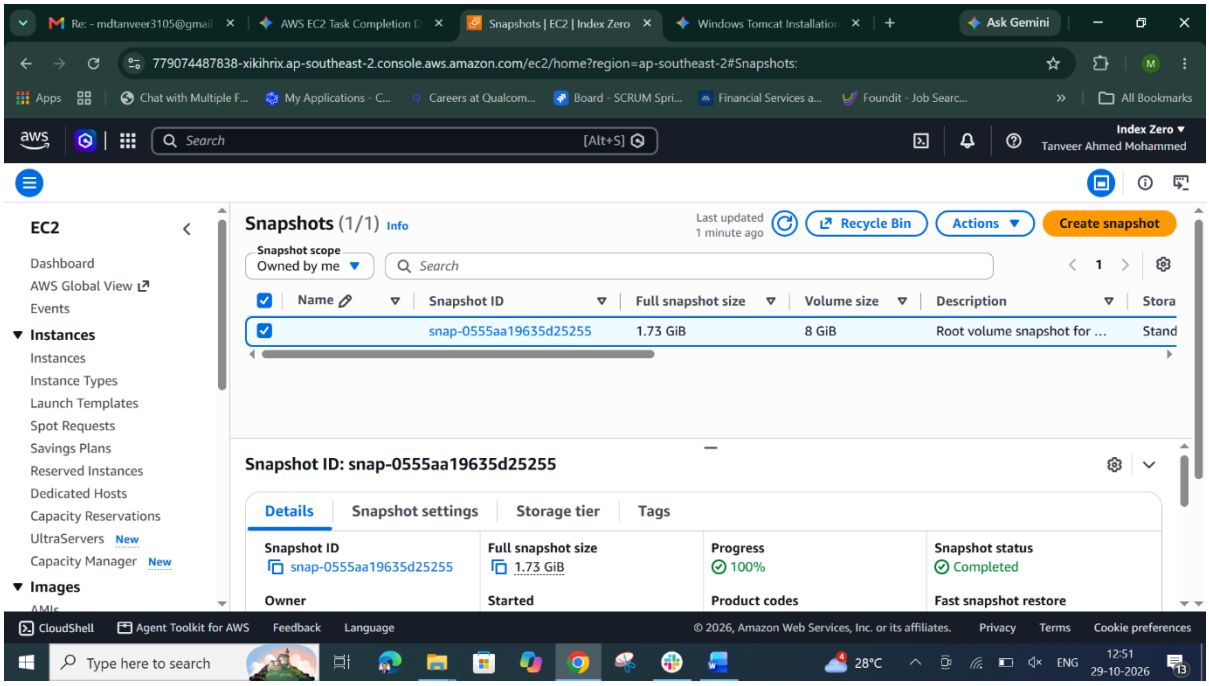
Snapshots | EC2 | Index Zero
779074487838-xikihrix.ap-southeast-2.console.aws.amazon.com/ec2/home?region=ap-southeast-2#Snapshots:
Search [Alt+S]
Index Zero
Tanveer Ahmed Mohammed
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
UltraServers New
Capacity Manager New
Images
Snapshots (1/1) Info
Last updated 1 minute ago
Recycle Bin
Actions
Create snapshot
Snapshot scope
Owned by me
Search
Name
Snapshot ID
Full snapshot size
Volume size
Description
snap-0555aa19635d25255
1.73 GiB
8 GiB
Root volume snapshot for ...
Snapshot ID: snap-0555aa19635d25255
Details
Snapshot settings
Storage tier
Tags
Snapshot ID
snap-0555aa19635d25255
Full snapshot size
1.73 GiB
Progress
100%
Snapshot status
Completed
Owner
Started
Product codes
Fast snapshot restore
CloudShell
Agent Toolkit for AWS
Feedback
Language
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
12:51
29-10-2026

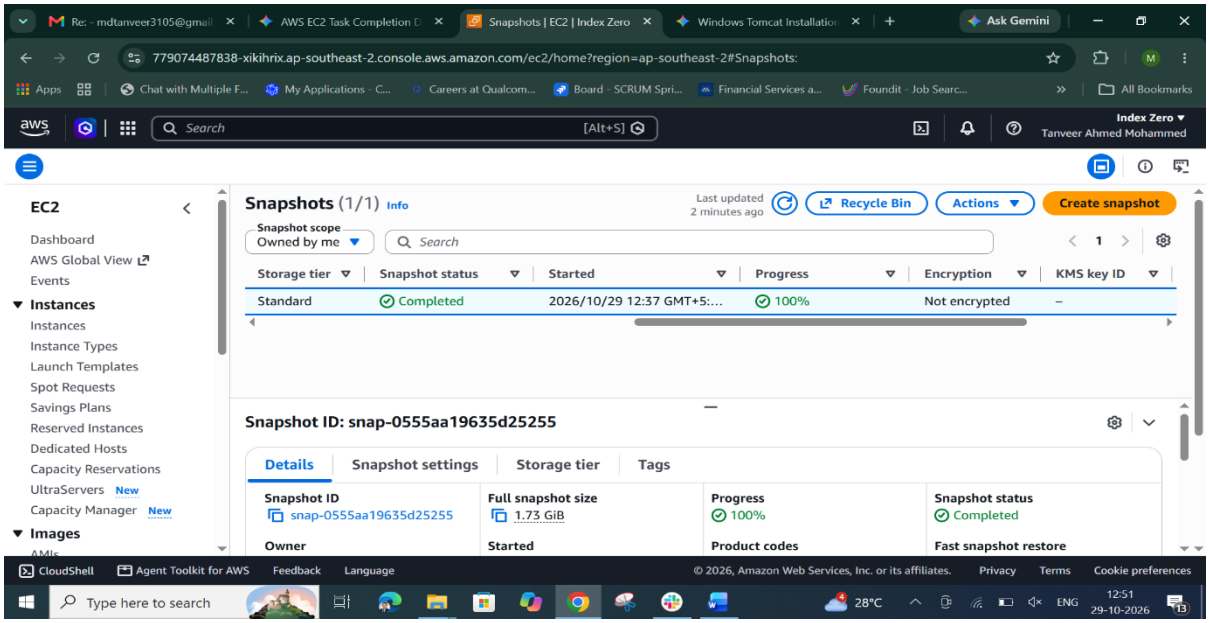
Snapshots | EC2 | Index Zero
779074487838-xikihrix.ap-southeast-2.console.aws.amazon.com/ec2/home?region=ap-southeast-2#Snapshots:
Search [Alt+S]
Index Zero
Tanveer Ahmed Mohammed
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
UltraServers New
Capacity Manager New
Images
Snapshots (1/1) Info
Last updated 2 minutes ago
Recycle Bin
Actions
Create snapshot
Snapshot scope
Owned by me
Search
Storage tier
Snapshot status
Started
Progress
Encryption
KMS key ID
Standard
Completed
2026/10/29 12:37 GMT+5:...
100%
Not encrypted
Snapshot ID: snap-0555aa19635d25255
Details
Snapshot settings
Storage tier
Tags
Snapshot ID
snap-0555aa19635d25255
Full snapshot size
1.73 GiB
Progress
100%
Snapshot status
Completed
Owner
Started
Product codes
Fast snapshot restore
CloudShell
Agent Toolkit for AWS
Feedback
Language
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
12:51
29-10-2026

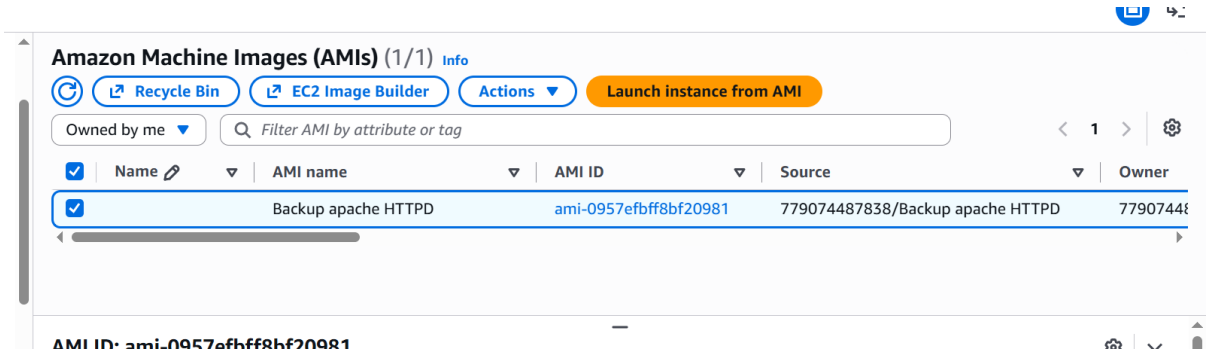
Amazon Machine Images (AMIs) (1/1) Info
Recycle Bin
EC2 Image Builder
Actions
Launch instance from AMI
Owned by me
Filter AMI by attribute or tag
Name
AMI name
AMI ID
Source
Owner
Backup apache HTTPD
ami-0957efbff8bf20981
779074487838/Backup apache HTTPD

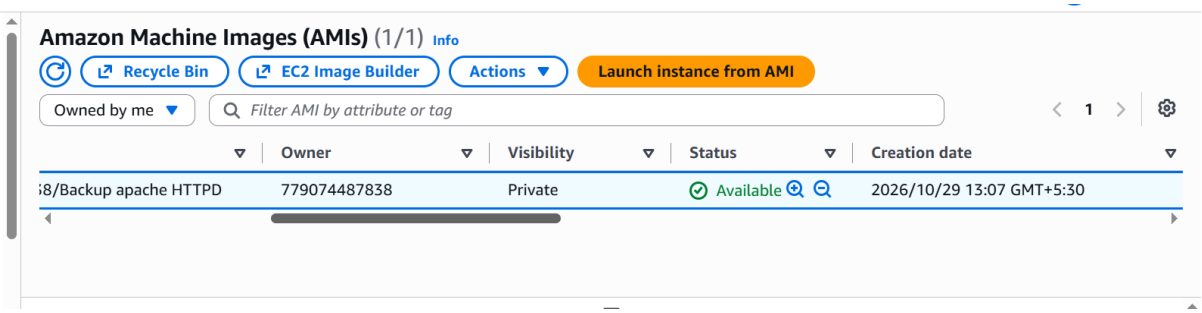


Here Created with AMI backup also.


5)Assign passwordless authentication for the EC2 created in Task 2.

Objective: Assign secure key-based (passwordless) authentication to the Ubuntu EC2 instance and disable insecure password-based SSH logins.

Implementation Steps:

1. **Generated a secure SSH key pair (ssh-keygen -t ed25519 -f clear) directly on the instance.**
2. **Registered the public key into the authorized keys directory (~/.ssh/authorized_keys with 600 file permissions).**
3. **Configured the SSH daemon (/etc/ssh/sshd_config) to explicitly allow PubkeyAuthentication yes and disallow PasswordAuthentication no.**
4. **Restarted the SSH service (sudo systemctl restart ssh) to apply changes.**

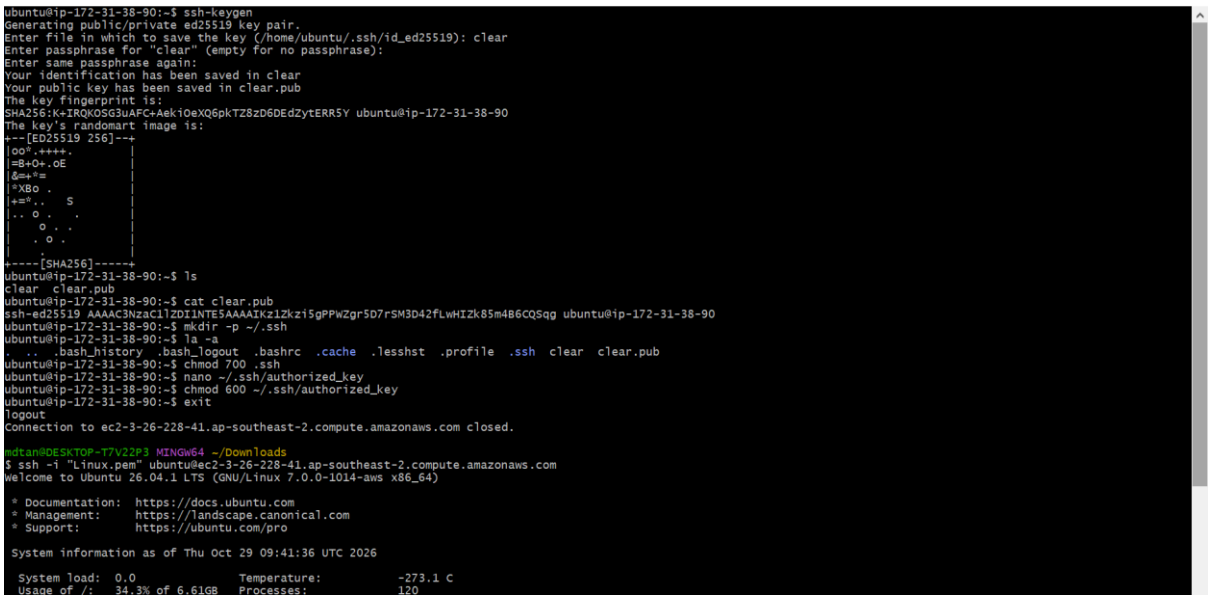

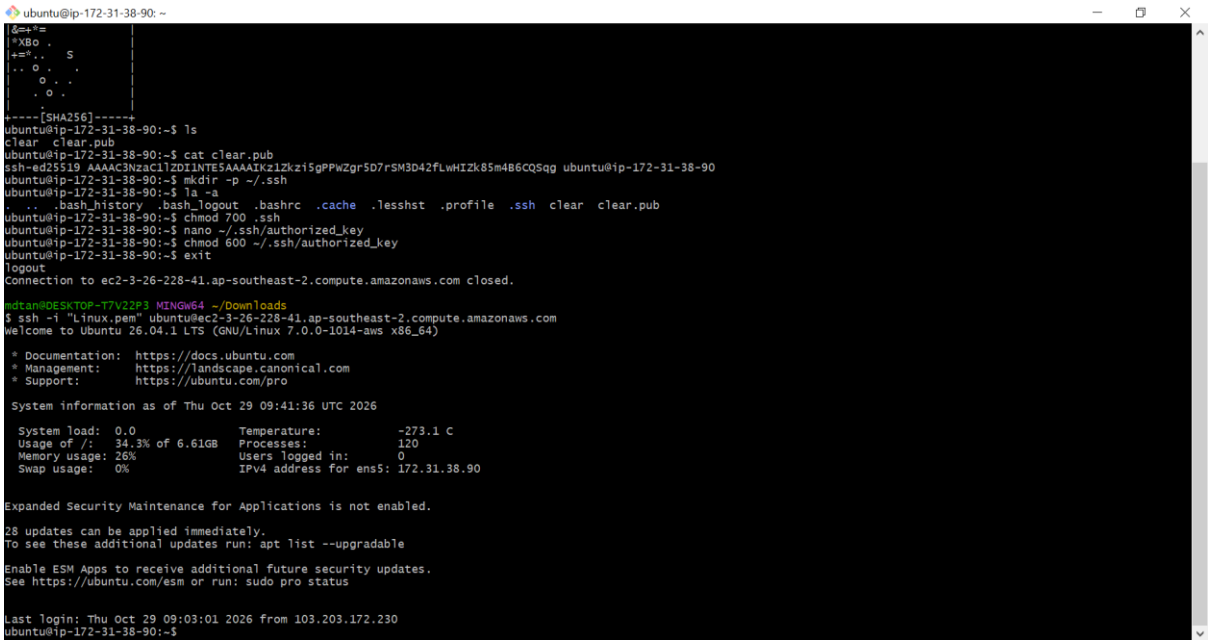


6)Launch any EC2 using the spot purchasing option.


 Launch the Instance:

- Open the Amazon EC2 Console and click Launch instance.
- Name: Spot-Instance-Demo
- AMI & Instance Type: Select Amazon Linux 2 and t2.micro.
- Key Pair & Security Group: Choose your preferred key pair and security group.

 Configure Spot Purchasing Options:

- Scroll down to the Advanced details or Pricing / Market options section.
- Check the box for Request Spot instances.
- Leave the default spot request configurations (e.g., Request type: *one-time*, Allocation strategy: *lowest-price*).
- Click Launch instance.

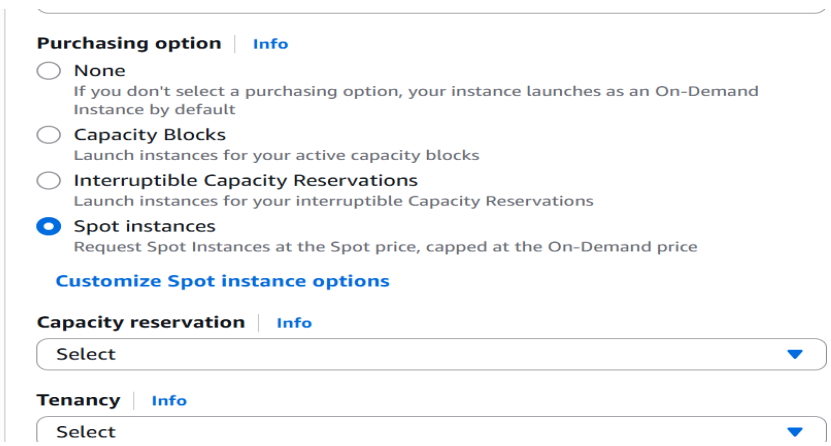

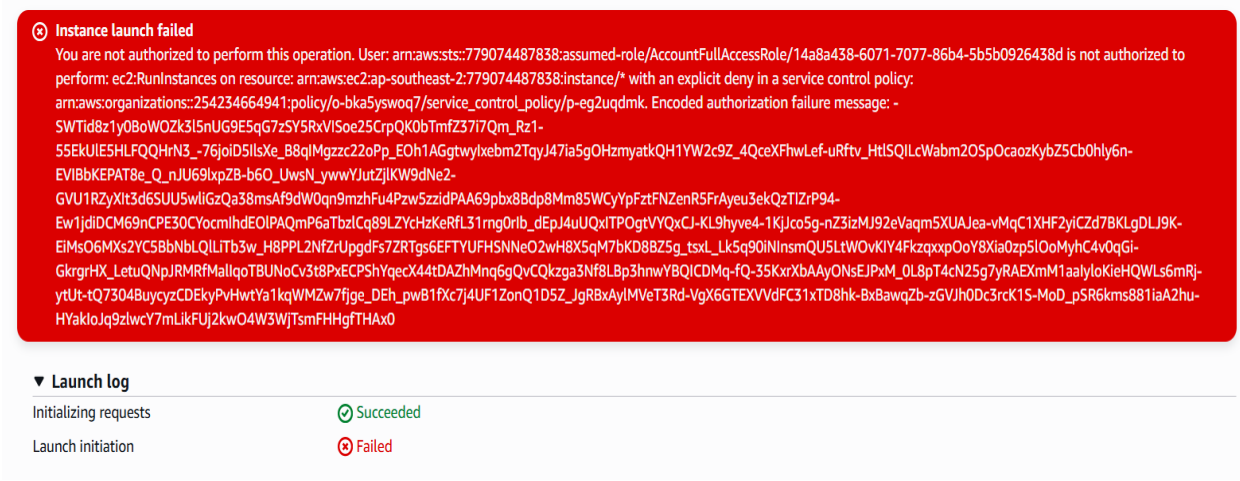

7)Enable termination policy on the EC2 created in Task 2.

Navigate to the EC2 Console:


- Open the Amazon EC2 Console and click on Instances.
- Select your Ubuntu instance (Web-Server-Ubuntu).


Enable Termination Protection:

- Click on the Actions dropdown menu located at the top of the console.
- Hover over Instance settings, then click on Change termination protection.
- Check the box for Enable under *Terminate protection*.
- Click Save.

Verify Protection:

- Try clicking Actions -> Instance state -> Terminate instance for this instance. AWS will display an error popup blocking the termination, confirming that protection is successfully enabled!

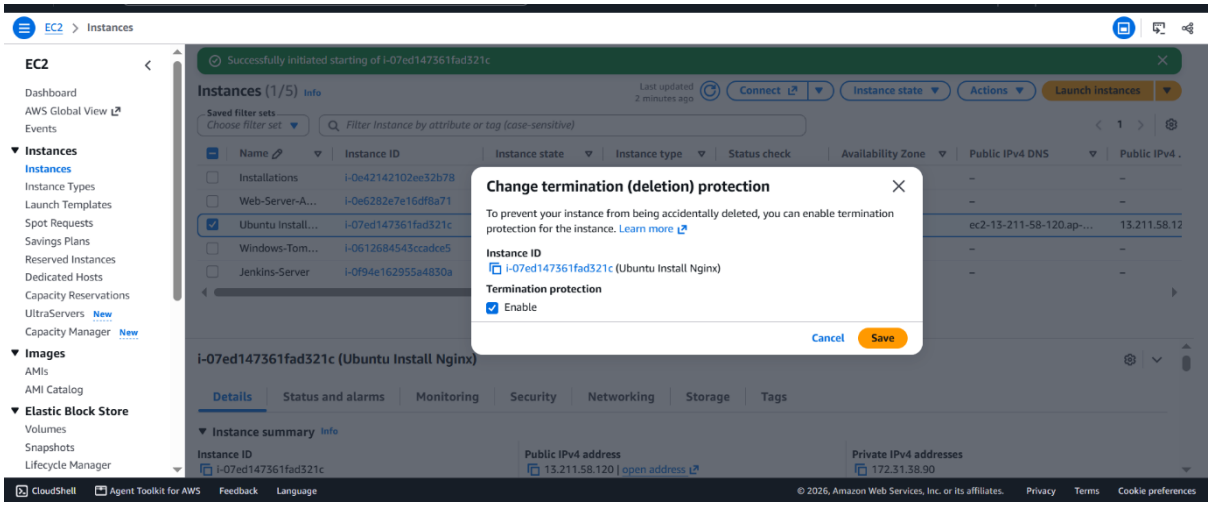

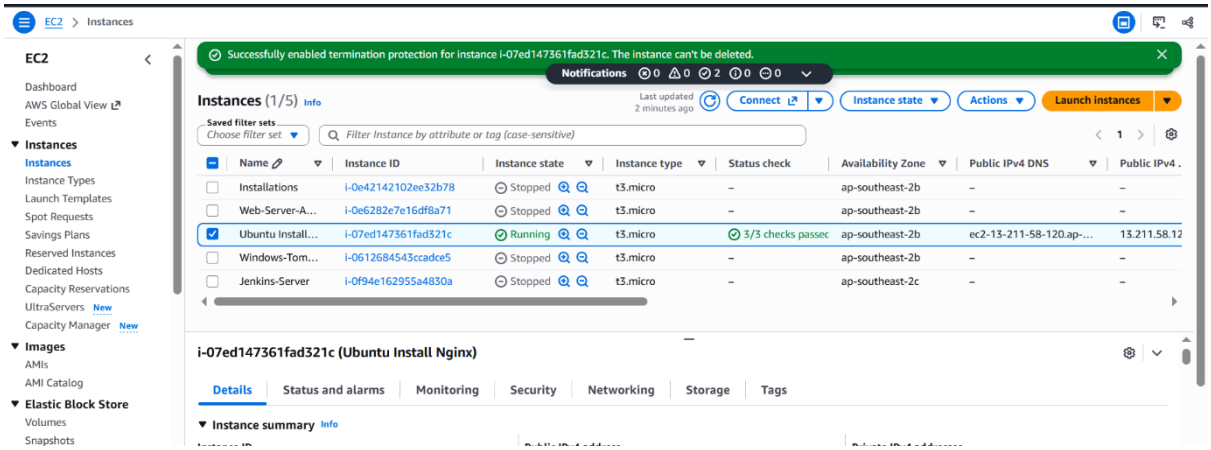

8)Launch one EC2 using AWS CLI.

Step 1: Connect to Your Instance via SSH

Open your terminal (or Git Bash) and connect to your remote EC2 management instance using your private key (Linux.pem):

Bash

ssh -i "Linux.pem" ubuntu@ec2-32-236-50-180.ap-southeast-2.compute.amazonaws.com

```[cite: 3]

#### **Step 2: Check and Install the AWS CLI**

Check if the AWS CLI is already installed on your system. If not, install it using the package manager (`apt`):

```bash
# Check version
aws --version

# Install AWS CLI (if not installed)
sudo apt update
sudo apt install awscli
```[cite: 1, 3]

Step 3: Query Free-Tier Eligible Instance Types (Optional / Troubleshooting)

To avoid errors regarding free-tier eligibility or region constraints, query which instance types are free-tier eligible in your active region (`ap-southeast-2`):

```bash
aws ec2 describe-instance-types \
    --filters "Name=free-tier-eligible,Values=true" \
    --query "InstanceTypes[*].InstanceType" \
    --output text
```[cite: 4]

Step 4: Launch the EC2 Instance

Run the `aws ec2 run-instances` command. This example dynamically fetches the latest Ubuntu 22.04 LTS AMI image ID and launches a free-tier eligible `t3.micro` instance:
```

```bash
aws ec2 run-instances \
  --image-id $(aws ec2 describe-images --owners amazon --filters "Name=name,Values=ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-*" --query "Images[0].ImageId" --output text) \
  --instance-type t3.micro \
  --count 1
```

Step 5: Verify the Instance Launch

Upon successful execution, the terminal returns a JSON response containing your new instance reservation details, network interface bindings, and status (e.g., ReservationId, SubnetId, PrivateIpAddress). You can also verify active instances anytime with:

```
aws ec2 describe-instances --query"Reservations[*].Instances[*].{InstanceId:InstanceId,State:State.Name,InstanceType:InstanceType}" --output table
```

Explanation

1. Connecting to the Server

Bash

ssh -i "Linux.pem" ubuntu@ec2-32-236-50-180.ap-southeast-2.compute.amazonaws.com

- **What it means: S**ecure **Sh**ell. Think of this as opening a secure remote control session from your local computer into your cloud computer (EC2 instance) using your security key file (Linux.pem).

2. Installing the AWS Tool

Bash

sudo apt install awscli

- **What it means: S**uper**u**ser **d**o **apt** install the **AWS C**ommand **L**ine **I**nterface. This downloads and installs the official toolkit that lets you control AWS directly from the terminal command line.

3. Checking Allowed Free-Tier Computers

Bash

aws ec2 describe-instance-types --filters "Name=free-tier-eligible,Values=true" --query "InstanceTypes[*].InstanceType" --output text

- **What it means:** You are asking AWS: *"Show me a list of all server sizes (instance types) that are currently free-tier eligible in my region so I don't accidentally get charged."*

4. Finding the Correct Software Template (AMI)

Bash

aws ec2 describe-images --owners amazon --filters "Name=name,Values=ubuntu/images/hvm-ssd/ubuntu-jammy-22.04-amd64-server-*" --query "Images[0].ImageId" --output text

- **What it means:** Inside the main run-instances command, this part acts like a search tool. It looks up the official identification code (ImageId) for an **Ubuntu 22.04 LTS** operating system template provided by Amazon.

5. Launching the EC2 Server

Bash

aws ec2 run-instances --image-id <id> --instance-type t3.micro --count 1

- **What it means:** This is the main command that tells AWS: *"Start up a new virtual server (run-instances), use the Ubuntu software template we just found (--image-id), build it as a small free-tier eligible computer (--instance-type t3.micro), and create just one of them (--count 1)."*

ubuntu@ip-172-31-38-90: ~

```
mdtan@DESKTOP-T7V22P3 MINGW64 ~/Downloads
$ sudo apt install awscli
bash: sudo: command not found

mdtan@DESKTOP-T7V22P3 MINGW64 ~/Downloads
$ ssh -i "Linux.pem" ubuntu@ec2-32-236-50-180.ap-southeast-2.compute.amazonaws.com
The authenticity of host 'ec2-32-236-50-180.ap-southeast-2.compute.amazonaws.com (32.236.50.180)' can't be established.
ED25519 key fingerprint is SHA256:/3j2NwnvRlaGw/p86YBDyNYzGbd4xaqGQHAX+ktbTOU.
This host key is known by the following other names/addresses:
    ~/.ssh/known_hosts:31: ec2-54-153-148-146.ap-southeast-2.compute.amazonaws.com
    ~/.ssh/known_hosts:34: ec2-13-238-142-134.ap-southeast-2.compute.amazonaws.com
    ~/.ssh/known_hosts:35: ec2-3-26-228-41.ap-southeast-2.compute.amazonaws.com
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-32-236-50-180.ap-southeast-2.compute.amazonaws.com' (ED25519) to the list of known hosts.
Welcome to Ubuntu 26.04.1 LTS (GNU/Linux 7.0.0-1014-aws x86_64)

 * Documentation:  https://docs.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

 System information as of Thu Oct 29 12:09:08 UTC 2026

  System load:  0.03             Temperature:          -273.1 C
  Usage of /:   34.4% of 6.61GB  Processes:            122
  Memory usage: 25%              Users logged in:      0
  Swap usage:   0%               IPv4 address for ens5: 172.31.38.90


Expanded Security Maintenance for Applications is not enabled.

28 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status


Last login: Thu Oct 29 09:41:37 2026 from 103.203.172.230
ubuntu@ip-172-31-38-90:~$ aws --version
Command 'aws' not found, but can be installed with:
sudo snap install aws-cli  # version 1.45.46, or
sudo apt  install awscli   # version 2.31.35-1
See 'snap info aws-cli' for additional versions.
ubuntu@ip-172-31-38-90:~$ sudo apt  install awscli   # version 2.31.35-1
Installing:
  awscli

Installing dependencies:
```

ubuntu@ip-172-31-38-90: ~


```
Installing dependencies:
  docutils-common  libimagequant0  liblcms2-2     libpaper2     libwebp7       python3-colorama  python3-prompt-toolkit    python3-wcwidth
  libdeflate0      libjbig0        liblerc4       libraqm0      libwebpdemux2  python3-docutils  python3-roman-numerals
  libgraphite2-3   libjpeg-turbo8  libopenjp2-7   libsharpyuv0  libwebpmux3    python3-olefile   python3-ruamel.yaml
  libharfbuzz0b    libjpeg8        libpaper-utils libtiff6      python3-awscrt  python3-pil       python3-ruamel.yaml.clib

Suggested packages:
  liblcms2-utils  docutils-doc  fonts-linuxlibertine  | ttf-linux-libertine  texlive-lang-french  texlive-latex-base  texlive-latex-recommended  python-pil-doc

Summary:
  Upgrading: 0, Installing: 30, Removing: 0, Not Upgrading: 21
  Download size: 16.0 MB
  Space needed: 148 MB / 4643 MB available

Continue? [Y/n] y
Get:1 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 python3-awscrt amd64 0.28.4+dfsg-1 [954 kB]
Get:2 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 python3-colorama all 0.4.6-4build1 [32.2 kB]
Get:3 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 docutils-common all 0.22.4+dfsg-1 [130 kB]
Get:4 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 python3-roman-numerals all 4.1.0-1 [8660 B]
Get:5 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 python3-docutils all 0.22.4+dfsg-1 [439 kB]
Get:6 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 python3-wcwidth all 0.2.14+dfsg1-1build1 [26.5 kB]
Get:7 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 python3-prompt-toolkit all 3.0.52-2 [258 kB]
Get:8 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 python3-ruamel.yaml.clib amd64 0.2.15+ds-1build1 [140 kB]
Get:9 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 python3-ruamel.yaml all 0.18.10+ds-1build1 [127 kB]
Get:10 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 awscli all 2.31.35-1 [11.1 MB]
Get:11 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libdeflate0 amd64 1.23-2ubuntu1 [48.9 kB]
Get:12 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 libgraphite2-3 amd64 1.3.14-11ubuntu1.1 [72.5 kB]
Get:13 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libharfbuzz0b amd64 12.3.2-2 [525 kB]
Get:14 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libimagequant0 amd64 4.4.1-1 [264 kB]
Get:15 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libjpeg-turbo8 amd64 2.1.5-4ubuntu4 [162 kB]
Get:16 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libjpeg8 amd64 8c-2ubuntu12 [2154 B]
Get:17 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 liblcms2-2 amd64 2.17-1ubuntu0.2 [172 kB]
Get:18 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 liblerc4 amd64 4.0.0+ds-5ubuntu2 [212 kB]
Get:19 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libpaper2 amd64 2.2.5-0.3maysync1 [17.3 kB]
Get:20 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libpaper-utils amd64 2.2.5-0.3maysync1 [15.6 kB]
Get:21 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libraqm0 amd64 0.10.4-1 [15.6 kB]
Get:22 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libsharpyuv0 amd64 1.5.0-0.1build1 [17.6 kB]
Get:23 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libjbig0 amd64 2.1-6.1ubuntu3 [30.4 kB]
Get:24 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libwebp7 amd64 1.5.0-0.1build1 [268 kB]
Get:25 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 libtiff6 amd64 4.7.0-3ubuntu5 [209 kB]
Get:26 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libwebpdemux2 amd64 1.5.0-0.1build1 [12.9 kB]
Get:27 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 libwebpmux3 amd64 1.5.0-0.1build1 [26.4 kB]
Get:28 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 python3-olefile all 0.47-1build1 [37.2 kB]
Get:29 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 libopenjp2-7 amd64 2.5.4-1ubuntu0.1 [190 kB]
Get:30 http://ap-southeast-2.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3 python3-pil amd64 12.1.1-2ubuntu1.3 [489 kB]
Fetched 16.0 MB in 0s (37.4 MB/s)
Preconfiguring packages ...
Selecting previously unselected package python3-awscrt.
(Reading database ... 85409 files and directories currently installed.)
```

Type here to search
30°C
ENG
17:41
29-10-2026

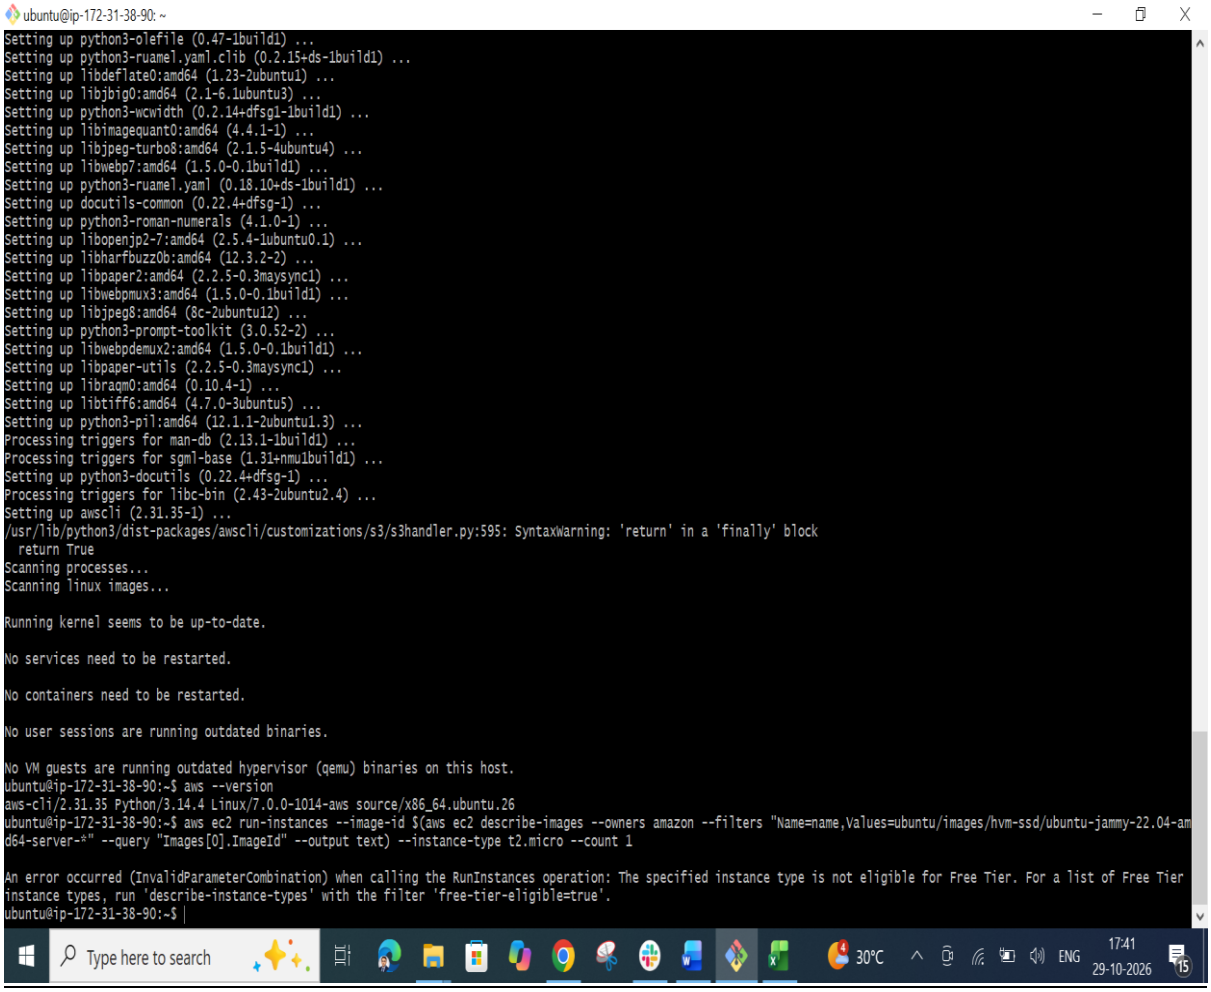

Finally, From CLI EC2 Server has Launched Successfully



To, Stop the Instance from CLI

Step 1: Find your real Instance ID

Run this quick command to see your active instances and copy the actual ID (it looks something like i-0123456789abcdef0):

Bash


```
aws ec2 describe-instances --query "Reservations[*].Instances[*].{InstanceId:InstanceId,State:State.Name}" --output table
```

Step 2: Stop the instance

Once you have your real ID, run the stop command with it:

Bash

```
aws ec2 stop-instances --instance-ids i-YOUR_ACTUAL_ID_HERE
```

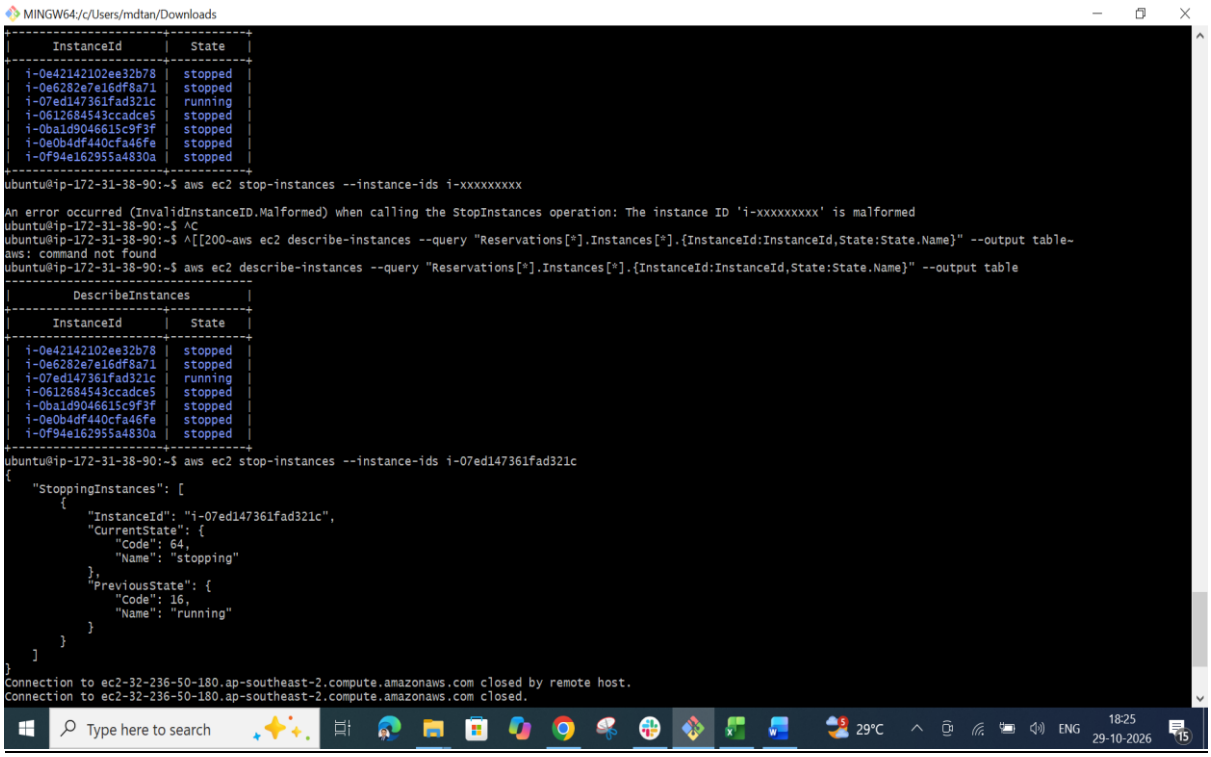
MINGW64:/c/Users/mdtan/Downloads
InstanceId	State
i-0e42142102ee32b78	stopped
i-0e6282e7e16df8a71	stopped
i-07ed147361fad321c	running
i-0612684543ccadce5	stopped
i-0ba1d9046615c9f3f	stopped
i-0e0b4df440cfa46fe	stopped
i-0f94e162955a4830a	stopped
ubuntu@ip-172-31-38-90:~$ aws ec2 stop-instances --instance-ids i-xxxxxxxxx
An error occurred (InvalidInstanceID.Malformed) when calling the StopInstances operation: The instance ID 'i-xxxxxxxxx' is malformed
ubuntu@ip-172-31-38-90:~$ ^C
ubuntu@ip-172-31-38-90:~$ ^[[200~aws ec2 describe-instances --query "Reservations[*].Instances[*].{InstanceId:InstanceId,State:State.Name}" --output table~
aws: command not found
ubuntu@ip-172-31-38-90:~$ aws ec2 describe-instances --query "Reservations[*].Instances[*].{InstanceId:InstanceId,State:State.Name}" --output table
DescribeInstances
InstanceId	State
i-0e42142102ee32b78	stopped
i-0e6282e7e16df8a71	stopped
i-07ed147361fad321c	running
i-0612684543ccadce5	stopped
i-0ba1d9046615c9f3f	stopped
i-0e0b4df440cfa46fe	stopped
i-0f94e162955a4830a	stopped
ubuntu@ip-172-31-38-90:~$ aws ec2 stop-instances --instance-ids i-07ed147361fad321c
{
"StoppingInstances": [
{
"InstanceId": "i-07ed147361fad321c",
"CurrentState": {
"Code": 64,
"Name": "stopping"
},
"PreviousState": {
"Code": 16,
"Name": "running"
}
}
]
}
Connection to ec2-32-236-50-180.ap-southeast-2.compute.amazonaws.com closed by remote host.
Connection to ec2-32-236-50-180.ap-southeast-2.compute.amazonaws.com closed.
Type here to search
29°C
ENG
18:25
29-10-2026