

arithmetic.c X input.txt output.txt

```
arithmetic.c > main()
1  #include <stdio.h>
2  int main ()
3  {
4      int a = 10;
5      int b = 20;
6      int ab= a+b;
7      printf ("%d", ab);
8
9      return 0;
10 }
```

input.txt X

input.txt

```
1  Generate code
   (Ctrl+I), or select a
   language (Ctrl+K M)
   Start typing to
   dismiss or don't show
   this again.
```

output.txt X

output.txt

```
1  30
```

0 0



Ln 10, Col 2

Spaces: 4

UTF-8

CRLF

{ } C



Go Live

Win32



Prettier



arithmetic.c x input.txt x output.txt

arithmetic.c > main()

```
1  #include <stdio.h>
2  int main ()
3  {
4      int a = 20;
5      int b = 10;
6      int sum= a+b;
7      printf ("%d\n", sum);
8      int sub = a-b;
9      printf ("%d\n",sub);
10
11     return 0;
12 }
```

input.txt x

input.txt

```
1  Generate code
   (Ctrl+I), or select a
   language (Ctrl+K M)
   Start typing to
   dismiss or don't show
   this again.
```

output.txt x

output.txt

```
1  30
2  10
3
```

arithmetic.c X input.txt X output.txt

C arithmetic.c > ...

```
1 // #include <stdio.h>
2 // int main ()
3 // {
4 //     int a = 20;
5 //     int b = 10;
6 //     int sum= a+b;
7 //     printf ("%d\n", sum);
8 //     int sub = a-b;
9 //     printf ("%d\n",sub);
10
11 //     return 0;
12 // }
13
14 #include <stdio.h>
15 int main ()
16 {
17     int a = 20;
18     int b = 10;
19     int sum= a+b;
20     printf (" summation = %d\n", sum);
21     int sub = a-b;
22     printf ("subtraction = %d\n",sub);
23
24     return 0;
25 }
```

input.txt X

input.txt

```
1 Generate code
   (Ctrl+I), or select a
   language (Ctrl+K M)
   Start typing to
   dismiss or don't show
   this again.
```

output.txt X

output.txt

```
1 summation = 30
2 subtraction = 10
3
```



arithmetic.c × input.txt × output.txt

arithmetic.c > main()

```
1 // #include <stdio.h>
7 // printf ("%d\n", sum);
8 // int sub = a-b;
9 // printf ("%d\n",sub);
10
11 // return 0;
12 // }
13
14 #include <stdio.h>
15 int main ()
16 {
17     int a = 20;
18     int b = 10;
19     int sum= a+b;
20     printf (" summation = %d\n", sum);
21     int sub = a-b;
22     printf ("subtraction = %d\n",sub);
23     int mul = a * b ;
24     printf ("multiplication = %d\n ", mul);
25     int div = a / b ;
26     printf ("Division= %d\n ", div);
27
28     return 0;
29 }
```

input.txt ×


input.txt

```
1 Generate code
  (Ctrl+I), or select a
  Language (Ctrl+K M)
  Start typing to
  dismiss or don't show
  this again.
```

output.txt ×

output.txt

```
1 summation = 30
2 subtraction = 10
3 multiplication = 200
4 Division= 2
5
```

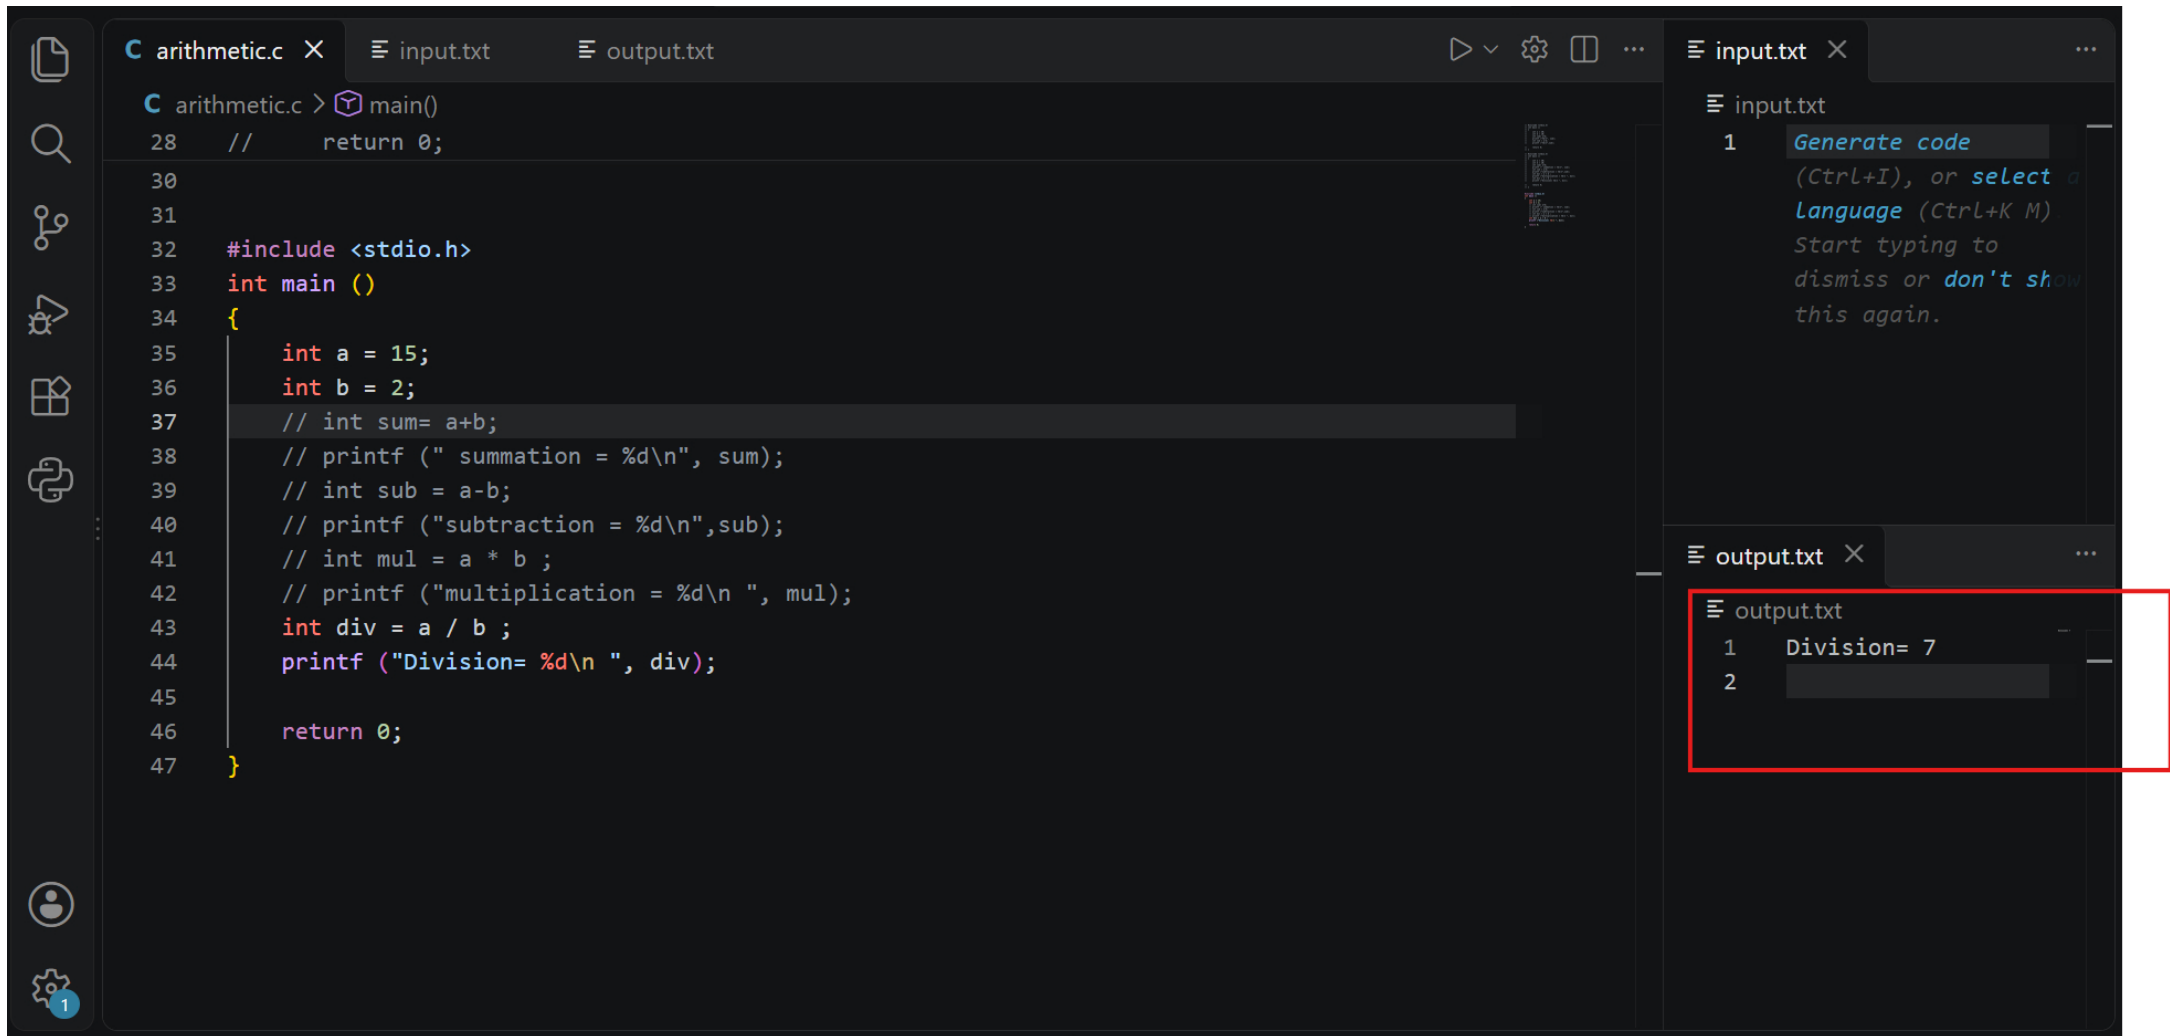

arithmetic.c

main()

28 // return 0;

30

31

32 #include <stdio.h>

33 int main ()

34 {

35 float a = 15;

36 int b = 2;

37 // int sum= a+b;

38 // printf (" summation = %d\n", sum);

39 // int sub = a-b;

40 // printf ("subtraction = %d\n",sub);

41 // int mul = a * b ;

42 // printf ("multiplication = %d\n ", mul);

43 float div = a / b ;

44 printf ("Division= %f\n ", div);

45

46 return 0;

47 }


input.txt


1 Generate code
(Ctrl+I), or select a
Language (Ctrl+K M)
Start typing to
dismiss or don't show
this again.

output.txt

1 Division= 7.500000

2

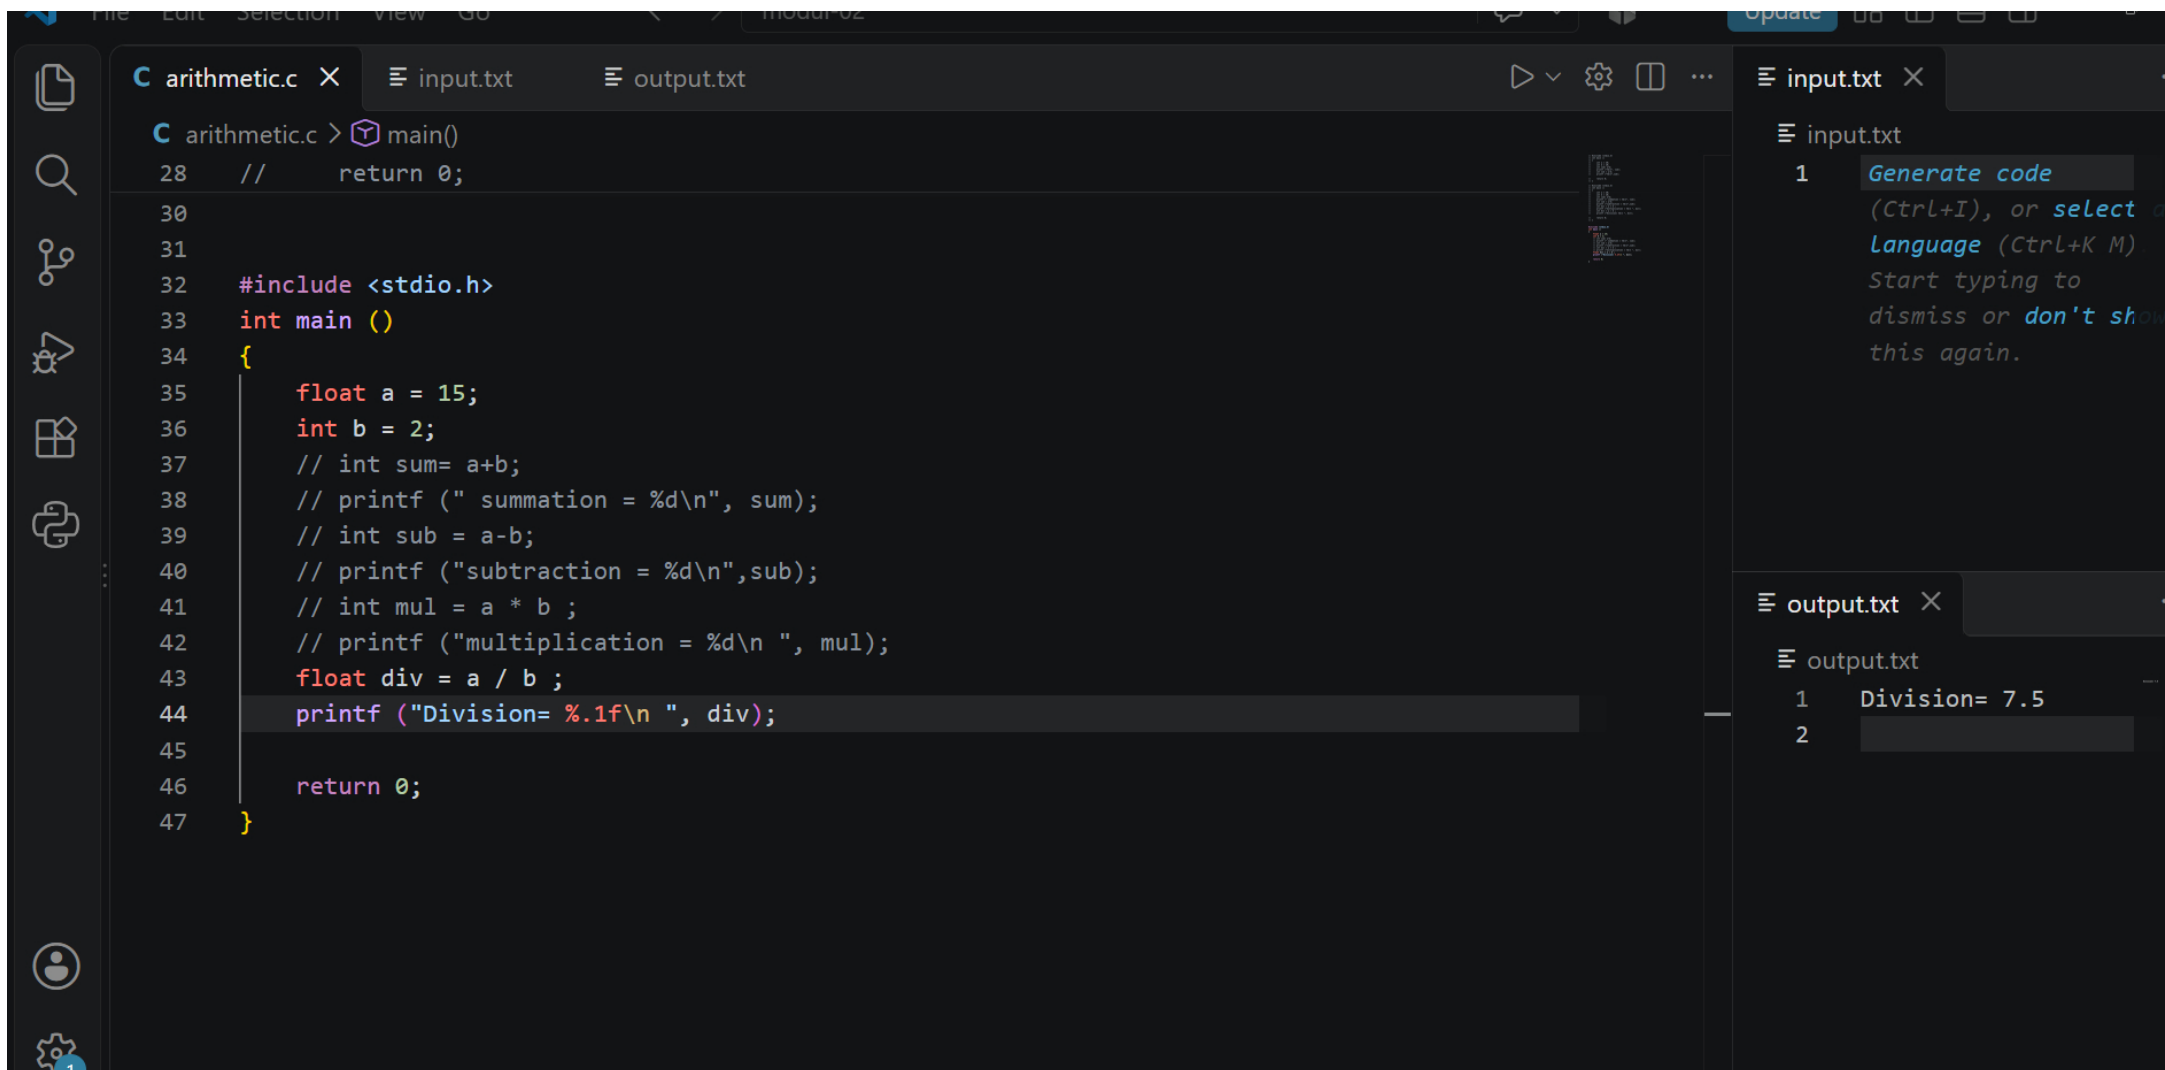

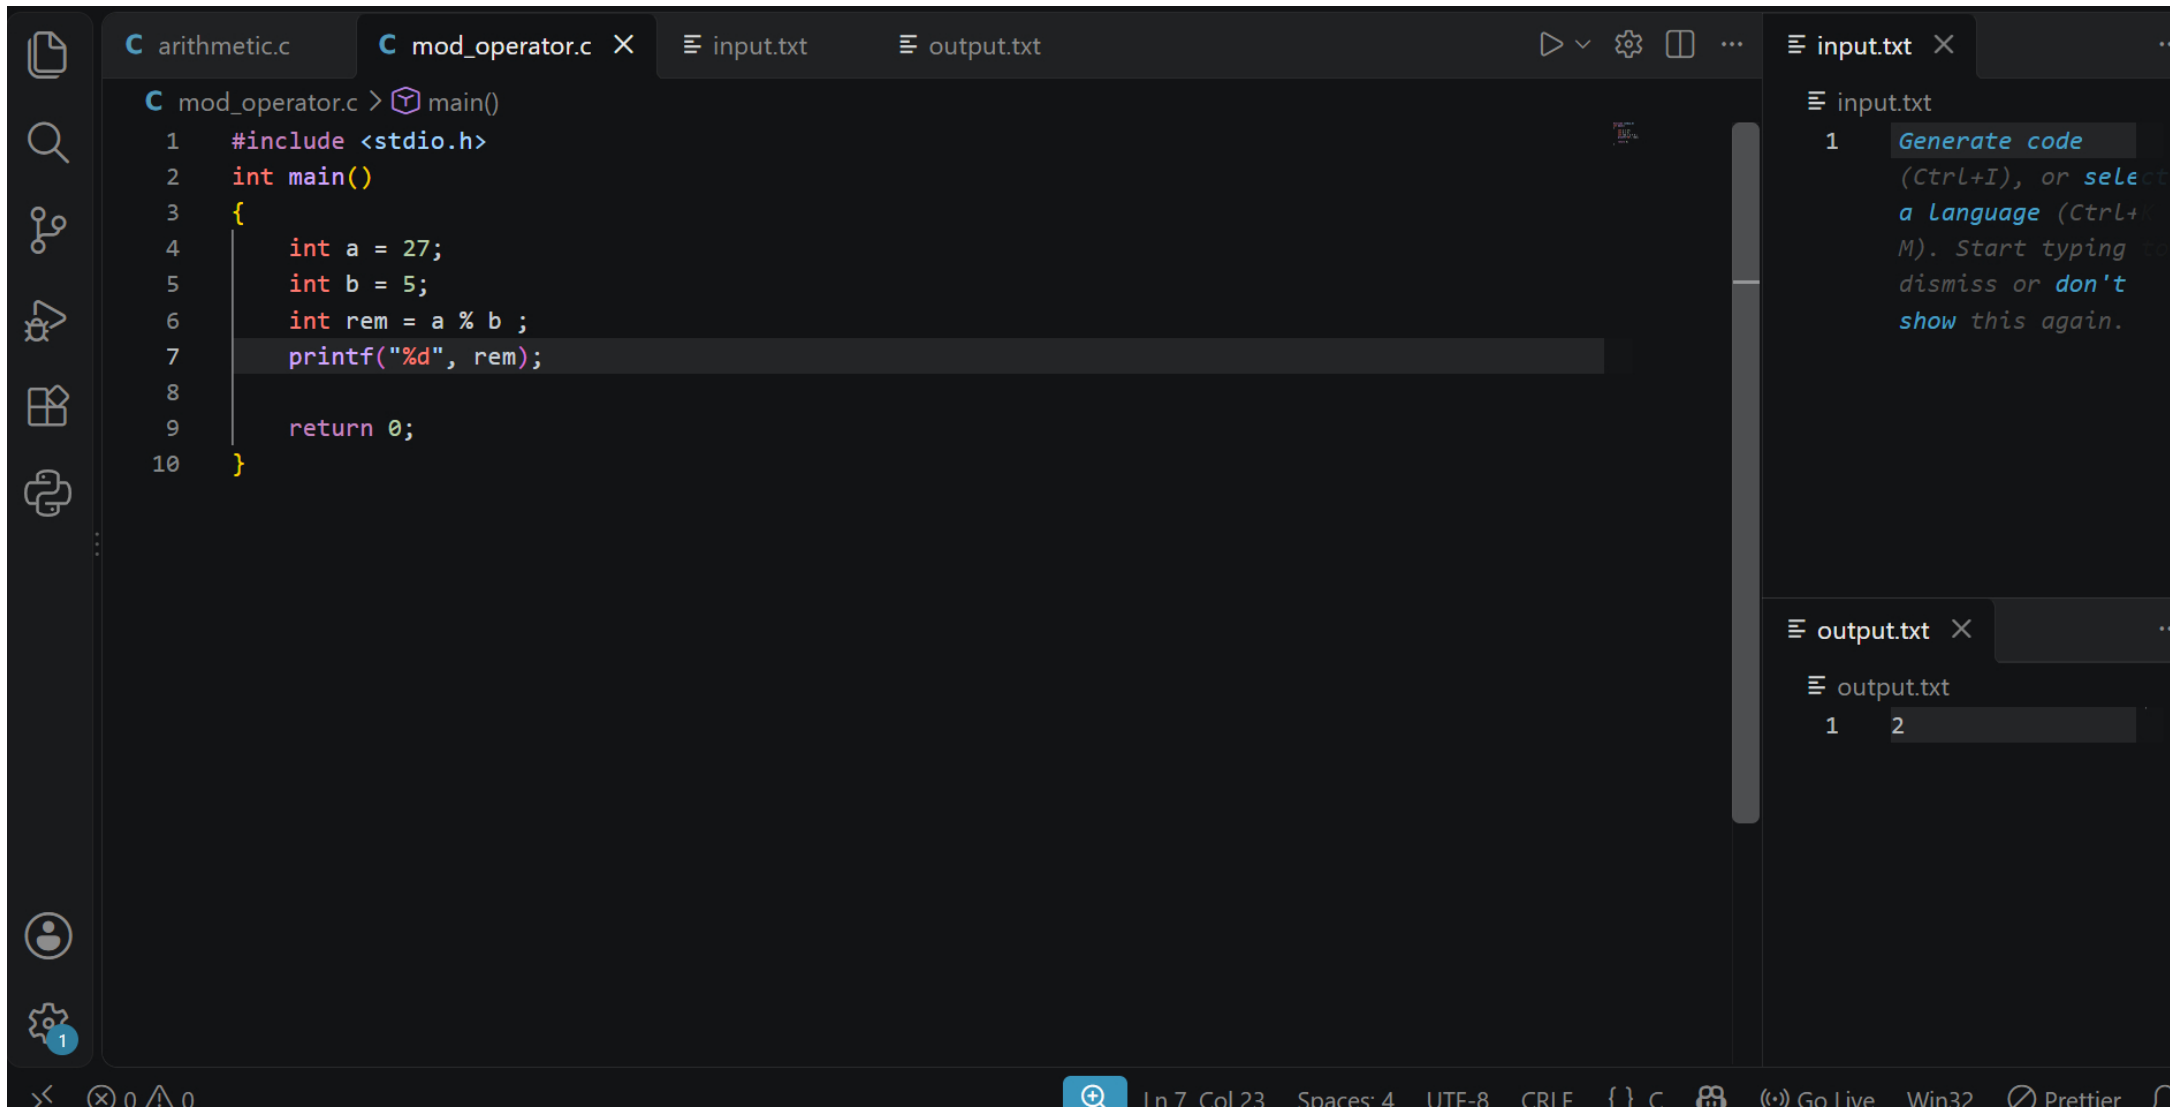

C arithmetic.c C mod_operator.c C if_else.c X input.txt output.txt



C if_else.c > main()

```
1  #include<stdio.h>
2  int main()
3  {
4      int money;
5      scanf("%d", &money);
6      if ( money >= 120 )
7      {
8          printf(" I will take burger");
9      }
10     else
11     {
12         printf(" I will not take burger");
13     }
14
15     return 0;
16
17 }
```

input.txt X

input.txt

```
1  500
```

output.txt X

output.txt

```
1  I will take burger
```

C arithmetic.c X C mod_operator.c C if_else.c X input.txt output.txt

C if_else.c > main()

```
1  #include<stdio.h>
2  int main()
3  {
4      int money;
5      scanf("%d", &money);
6      if ( money >= 120 )
7      {
8          printf(" I will take burger");
9      }
10     else
11     {
12         printf(" I will not take burger");
13     }
14
15
16     return 0;
17 }
```

input.txt X

input.txt

1 80

output.txt X

output.txt

1 I will not take burger

C arithmetic.c X C mod_operator.c C if_else.c X input.txt output.txt

C if_else.c > main()

```
1  #include<stdio.h>
2  int main()
3  {
4      int money;
5      scanf("%d", &money);
6      if ( money >= 120 )
7      {
8          printf(" I will take burger");
9      }
10     else if ( money < 120 && money > 50)
11     {
12         printf(" I will take pizza");
13     } else{
14         printf(" Oh! No ");
15     }
16
17
18     return 0;
19 }
```

input.txt X

input.txt

1 80

output.txt X

output.txt

1 I will take pizza

C arithmetic.c X C mod_operator.c C if_else.c X input.txt output.txt

C if_else.c > main()

```
1  #include<stdio.h>
2  int main()
3  {
4      int money;
5      scanf("%d", &money);
6      if ( money >= 120 )
7      {
8          printf(" I will take burger");
9      }
10     else if ( money < 120 && money > 50)
11     {
12         printf(" I will take pizza");
13     } else{
14         printf(" Oh! No ");
15     }
16
17
18     return 0;
19 }
```

input.txt X

input.txt

1 20

output.txt X

output.txt

1 Oh! No

FileEditSelectionViewGo...modul-02

Update

arithmetic.cmod_operator.cif_else.cnested_if_else.cXinput.txtol▶⚙️

input.txtX

input.txt

110000

output.txtX

output.txt

1I will Go to Noakhali:
2I will go to my friends
3

nested_if_else.c > main()

```
1 #include<stdio.h>
2 int main ()
3 {
4     int money;
5     scanf("%d", &money);
6     if( money > 7000)
7     {
8         printf(" I will Go to Noakhali\n");
9         if ( money > 5000)
10        {
11            printf("I will go to my friends Home \n");
12        }
13        else{
14            printf(" I will stay Noakhali\n");
15        }
16    }
17 }
18 else
19 {
20     printf(" I will go to home\n");
21 }
22
23 return 0;
24 }
```

```
1 | I will go to home
2 |
```



mod_operator.c

if_else.c

nested_if_else.c

just_if.c X

input.txt

⌵ ⚙️ □ ...

just_if.c > main()

```
3 {
4     int money;
5     scanf("%d", &money);
6     if ( money > 5000)
7     {
8         printf(" I will go to market\n");
9     }
10    if (money > 300)
11    {
12        printf(" I will go to Home\n");
13    }
14    if (money > 7000)
15    {
16        printf(" I will go to jongale\n");
17    }
18
19    return 0;
20 }
```

input.txt X

input.txt

```
1 5500
```

output.txt X

output.txt

```
1 I will go to market
2 I will go to Home
3
```

mod_operator.c

if_else.c

nested_if_else.c

just_if.c X

input.txt

≡ ⏪ ⏩ ⚙️ 📄 ...

input.txt X

...

C just_if.c > main()

```
3  {
4      int money;
5      scanf("%d", &money);
6      if ( money > 5000)
7      {
8          printf(" I will go to market\n");
9      }
10     if (money > 300)
11     {
12         printf(" I will go to Home\n");
13     }
14     if (money > 7000)
15     {
16         printf(" I will go to jongale\n");
17     }
18
19     return 0;
20 }
```

input.txt

1 8000

output.txt X

...

output.txt

```
1 I will go to market
2 I will go to Home
3 I will go to jongale
4
```

mod_operator.c × if_else.c nested_if_else.c just_if.c × input.txt

just_if.c > main()

```
3 {
4     int money;
5     scanf("%d", &money);
6     if ( money > 5000)
7     {
8         printf(" I will go to market\n");
9     }
10    if (money > 300)
11    {
12        printf(" I will go to Home\n");
13    }
14    if (money > 7000)
15    {
16        printf(" I will go to jongale\n");
17    }
18
19    return 0;
20 }
```

input.txt

```
1 1000
```

output.txt

```
1 I will go to Home
2
```

Problems 3 Output Debug Console Terminal Ports Spell Checker 3

o \$