Measuring Drift in Therapeutic AI: A Stability-Based Evaluation of Sovereign LLMs in Nightmare Therapy

Daniel Menzel
Institute of Cognitive Science, University of Osnabrück
dmenzel@uos.de

November 2026

Abstract

More and more people turn to large language models for mental health support. The models respond fluently, but ask the same question twice and you may get two different answers. In therapy, where trust depends on predictable guidance, that variation changes the treatment a patient receives.

This paper measures response consistency in the rescripting phase of Imagery Rehearsal Therapy, where a model must choose a therapeutic strategy and carry it out. Twelve models, spanning the EU-sovereign Mistral family, two proprietary ceilings (GPT-5.4, Claude Sonnet 4.6), and open-weight comparators, are evaluated across 7,200 trials at five temperatures. Every trial sees a byte-identical frozen dialogue history, so any variation comes from the model alone. A three-level framework compares strategy selections (Jaccard similarity), response texts (BERTScore), and whether the model does what it declared (LLM-judge alignment, $\kappa = 0.777$ against human annotation).

The main findings are: (1) Consistency differs by model far more than by patient. Median decision consistency spans 0.69 to 1.00 across models, while the six patient profiles show no significant effect. (2) The instability sits in strategy selection, not execution. Temperature changes which strategies a model picks, not how well it carries them out. (3) Greedy decoding is not reliably optimal. Ten of twelve models reach their best mean consistency at a low non-zero temperature, a pattern the small per-condition sample leaves suggestive rather than confirmed. (4) BERTScore detects when the wording changes but not when the strategy does, so no single metric shows the full pattern. Mistral Medium 3.5, an EU-sovereign open-weight model, tops the overall stability ranking.

1 Introduction

Recurring nightmares are a common clinical problem with an effective treatment. Nightmare disorder affects roughly 4% of adults (Sandman et al., 2013; Li et al., 2010), and Imagery Rehearsal Therapy (IRT) is its best-evidenced protocol: the patient rescripts the nightmare under therapist guidance (Krakow et al., 2001; Morgenthaler et al., 2018). A persistent shortage of trained therapists limits access (Stade et al., 2024), making scalable, AI-assisted delivery a practical goal. Our group demonstrated the efficacy of a web-based IRT self-help intervention in a randomised controlled trial (Voss et al., 2026), and its successor, reDreamAI, is a consumer-facing IRT chatbot that guides users through the full protocol and is the deployment context for this study.

The deployment context creates a specific problem. A general-purpose assistant has no therapeutic obligation, and response variability is acceptable or even desirable. A protocol-driven agent must make consistent strategic decisions. The rescripting step requires an active choice of therapeutic strategy, and an agent that selects different strategies on repeated runs of the same case is clinically unreliable, regardless of how capable any single response may be. Unlike rule-based chatbots, whose behaviour can be reviewed once before deployment, an LLM agent generates a new response on every run. Each run is a new draw from the output distribution, so stability must be evaluated repeatedly rather than verified once. The regulatory setting sharpens the requirement: the EU AI Act classifies autonomous therapeutic AI as high-risk and demands auditability (van Kolfschooten and van Oirschot, 2024; Aboy et al., 2024), and data sovereignty requirements push deployments toward self-hostable, EU-resident models (Dale, 2025). This constraint shapes the model selection in Section 4.1.

Existing evaluations do not measure this property. Standard benchmarks measure what a model *can* do, not whether it does the same thing reliably: a model can score well on a single evaluation while producing different therapeutic strategies on repeated runs of the same input. Clinical-LLM frameworks assess quality, safety, or efficacy of single outputs (Zhang et al., 2024; Chiu et al., 2024), so they cannot detect cross-run inconsistency. The consistency literature studies repeated runs in other settings: factual answers (Novikova et al., 2025), creative diversity (Xu et al., 2025), numerical nondeterminism of inference (Yuan et al., 2025), and temperature effects on problem solving (Renze, 2024). None of these settings involves repeated *therapeutic decisions*, where a switch between a small set of clinically grounded strategies changes the treatment a patient receives.

This paper addresses the following research question:

> How consistent are LLM therapeutic responses across independent runs when given the same patient context within a structured IRT protocol?

Models declare their therapeutic strategy in a structured `<plan>` block before responding, which makes the clinical decision itself observable. Three contributions follow.

Contribution 1: A three-level evaluation framework that measures stability at each layer of the generation process: *plan consistency* (do strategy selections repeat?), *response similarity* (do the generated texts convey the same meaning?), and *plan–response alignment* (does the model do what it declared?). Together, the layers reveal divergence patterns that no single metric can detect.

Contribution 2: A cross-model comparison applying this framework to 12 models across 6 patient vignettes, 5 temperatures, and 20 trials per condition (7,200 trials), spanning EU-sovereign, proprietary, and open-weight model classes. Decision stability separates models sharply (median Jaccard 0.69–1.00) and is a model property rather than a patient-difficulty property. Response wording drifts with temperature faster than the underlying strategy choice.

Contribution 3: An extensibility demonstration that doubles as a robustness check: Mistral Medium 3.5 and Command A were added four months after the main runs, on identical frozen histories with a single configuration entry each. All substantive findings survive the model-set enlargements.

The study isolates the IRT rescripting phase because it is the stage that requires active strategy decisions. Isolating a single stage eliminates stage-routing confounds and allows any measured instability to be attributed to the therapist model rather than to upstream variation in the conversation.

2 Related Work

2.1 IRT and Digital Delivery

Imagery Rehearsal Therapy is the first-line psychological treatment for nightmare disorder (Krakow et al., 1995, 2001; Morgenthaler et al., 2018), with rescripting as its cognitive core (Albanese et al., 2022). Conversational agents in psychotherapy date back to ELIZA's Rogerian script (Weizenbaum, 1966). Modern digital and conversational delivery of structured protocols has shown feasibility and efficacy (Fitzpatrick et al., 2017; Heinz et al., 2025; Wu et al., 2026), including the randomised controlled trial of web-based IRT that precedes this work (Voss et al., 2026). Llama 3.3 70B, the model of that prior study, is included in the comparison for continuity. The present work asks the evaluation question that deployment raises: whether the LLM component of such a system makes stable clinical decisions.

2.2 Evaluating Clinical LLMs

Existing frameworks target competence and safety of single responses (Zhang et al., 2024; Iftikhar et al., 2025; Stade et al., 2024). The closest existing work, BOLT (Chiu et al., 2024), measures whether a model applies appropriate therapeutic techniques, but like its peers it evaluates single responses rather than the distribution across repeated runs. Protocol fidelity instruments from clinical psychology (Mowbray et al., 2003; Bellg et al., 2004; Kohrt et al., 2015) inspire the ternary alignment rubric used here. The focus of this study differs from all of these: not whether one response is good, but whether repeated responses agree.

2.3 LLM Output Consistency

Sampling temperature and stochastic decoding measurably change task behaviour (Renze, 2024), and even nominally deterministic inference carries numerical nondeterminism (Yuan et al., 2025). Novikova et al. (2025) survey consistency research, largely over factual and task-answer settings, and Xu et al. (2025) quantify diversity collapse in creative generation. The present setting differs on both axes. The unit of consistency is a clinical decision drawn from a fixed therapeutic taxonomy, not a fact or a plot, and the context is a mid-protocol therapy state where run-to-run disagreement directly changes treatment. To our knowledge, decision-level stability within a structured clinical protocol has not been measured.

2.4 Chain-of-Thought and Declared Intent

Chain-of-thought prompting (Wei et al., 2022) structures generation, but CoT explanations are often unfaithful to internal computation (Turpin et al., 2023; Lanham et al., 2023). The plan block is therefore framed as declared intent rather than as a reasoning trace (Section 3.5). LLM-as-judge protocols (Zheng et al., 2023) underpin Method 3, with cross-family judging to mitigate self-preference bias.

3 Method

3.1 Two-Stack Architecture

The evaluation system separates dialogue creation from stability measurement through two decoupled stacks (Figure 1). The *generation stack* produces synthetic therapy sessions by running a multi-agent

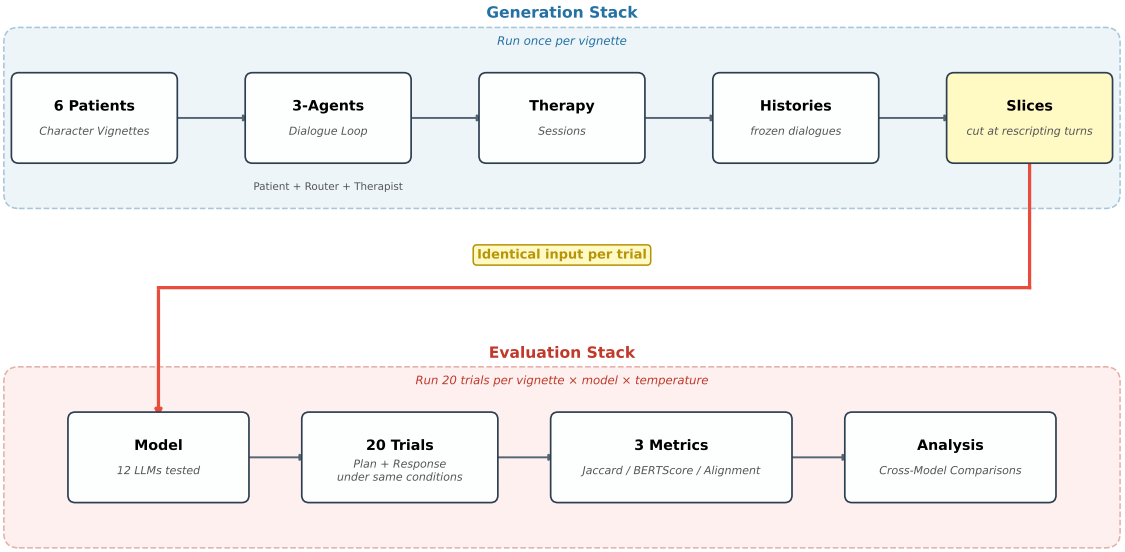


Figure 1: Two-stack pipeline. The generation stack produces frozen conversation histories (run once). The evaluation stack presents each history to the model under test across twenty independent trials per condition.

dialogue loop. The *evaluation stack* measures the stability of therapeutic responses by presenting frozen conversation histories to the model under test and collecting multiple independent outputs.

If the evaluation stack generated its own dialogue context, any measured instability could reflect upstream randomness in the patient or routing agents rather than genuine variation in the therapist model. By freezing the conversation history before evaluation begins, every trial receives identical input, and any observed inconsistency is attributable solely to the model under test.

3.2 Dialogue Generation

The generation stack orchestrates a three-agent loop that produces naturalistic IRT sessions. Each turn passes through a *patient* agent that responds based on a behavioural profile (nightmare content, emotional style, engagement pattern), a *router* agent that classifies the current protocol stage, and a *therapist* agent that generates a stage-appropriate response. The loop traverses the IRT protocol (Figure 2): the dialogue moves through recording and rescripting and on to rehearsal as the router judges each stage complete. Sessions were capped at 20 or 30 messages, and all six contain at least five rescripting exchanges, which is all the experiment uses.

Six patient vignettes cover the range of clinical presentation difficulty expected in IRT deployment: *anxious*, *avoidant*, *cooperative*, *resistant*, *skeptic*, and *trauma*. They range from a cooperative patient who engages readily with rescripting instructions to a trauma patient whose nightmare content triggers intense emotional responses mid-session. The vignette design is informed by anonymised session data from the prior efficacy study. Data protection requirements prevent using real transcripts directly, so synthetic profiles were created and validated against published work on simulated patients.

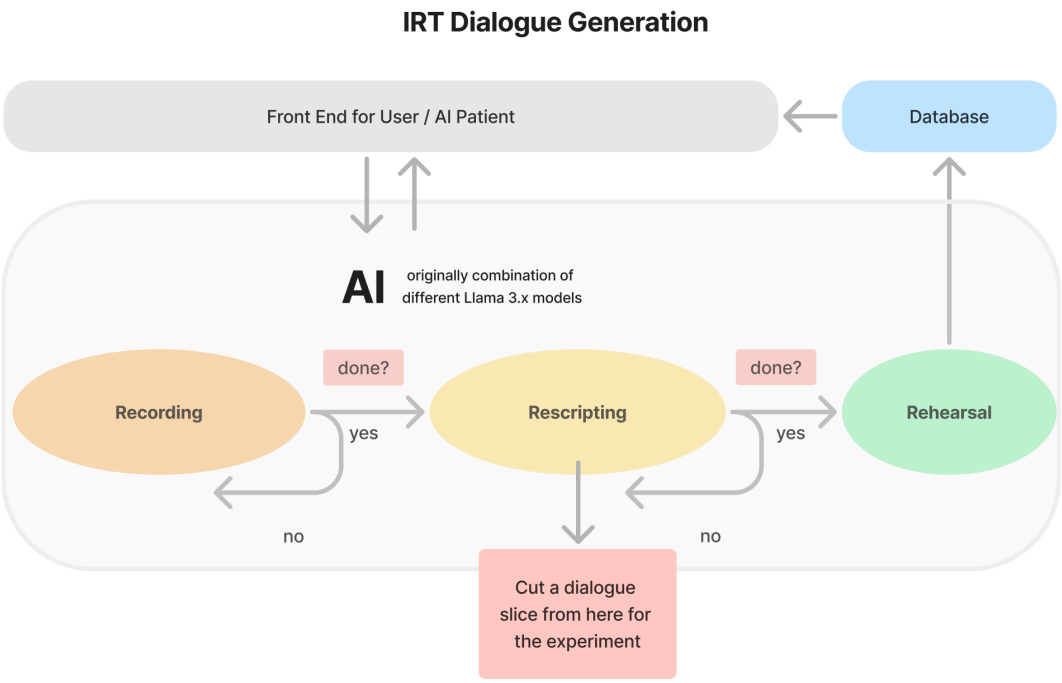


Figure 2: Dialogue generation loop. The three-agent system traverses recording, rescripting, and rehearsal. Frozen history slices for the experiment are cut at rescripting-turn boundaries.

Wang et al. (2024b) show that expert-defined behavioural principles produce clinically plausible simulated patients, and Wang et al. (2024a) provide conversational styles (direct, resistant, expressive, minimal, deviating, agreeable) that parallel the six profiles used here. Six profiles sample the difficulty range but do not claim exhaustive coverage of patient variability.

3.3 Frozen Histories and Conversation Depth

Frozen conversation histories serve as deterministic evaluation entry points. Each vignette's session is sliced at rescripting-turn boundaries, where each slice ends after a complete therapist–patient exchange. Every trial, across all models and temperatures, receives the identical frozen history as input.

The evaluation depth was chosen empirically. A preliminary analysis tested Mistral Large 3 at five slice depths across all six vignettes: consistency was lowest at the second slice (mean Jaccard 0.77 at T=0.075), where the strategy is not yet anchored by prior exchanges, and rose to near-ceiling values from the third slice onward ($J > 0.93$). The main experiment therefore evaluates at the second rescripting boundary (slice 2), the depth at which the pilot model was least consistent. The pilot covers a single model, so reading slice 2 as a conservative lower bound for all twelve assumes that this depth profile generalises: a model that is consistent here would plausibly be at least as consistent later in the conversation.

3.4 Evaluation Stack and Fused Generation

The evaluation stack bypasses the router and injects the rescripting prompt directly. Because the protocol stage is known a priori (all slices lie within the rescripting phase), routing is unnecessary and

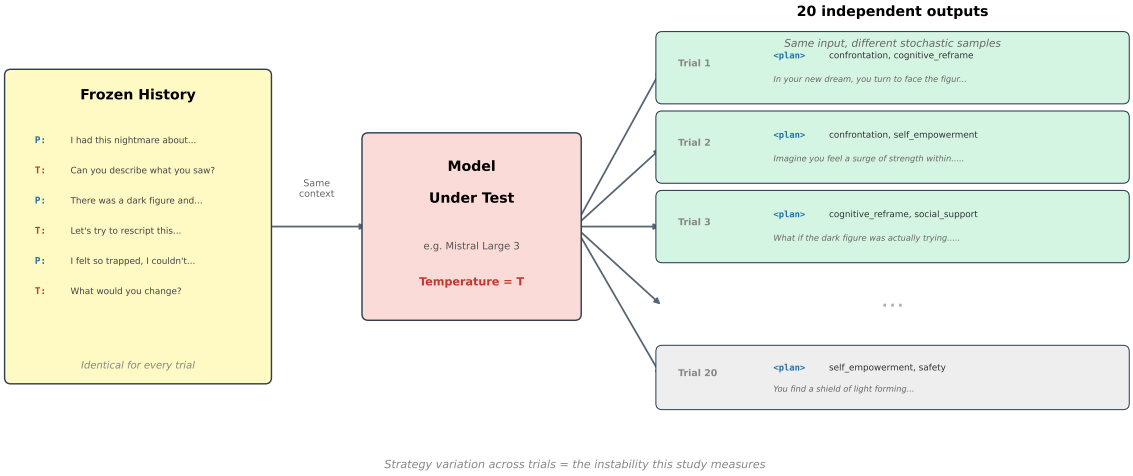


Figure 3: Measurement design. The same frozen history is presented to the model under test twenty times. Each trial independently produces a plan and a therapeutic response. Variation across trials is the instability this study measures.

would only add a source of variation. Bypassing it isolates the therapist model from stage-classification error.

Each trial uses *fused* generation: the model produces a plan block, `<plan>strategy_1 / strategy_2</plan>`, declaring one or two therapeutic strategies from a fixed taxonomy, followed by its therapeutic response, in a single call. The plan tokens condition the response tokens in a chain-of-thought style generation. This fusion is what makes the alignment analysis of Method 3 meaningful: because plan and response come from a single pass, any mismatch between declared intent and executed strategy reflects the model's own inconsistency rather than a decoupling artefact. Figure 3 illustrates the measurement design.

Twenty independent trials are collected per condition, yielding $\binom{20}{2} = 190$ pairwise comparisons. This trial count balances statistical coverage of the pairwise similarity distribution against compute cost.

3.5 The Plan Mechanism

The plan block raises a methodological question. The faithfulness literature shows that chain-of-thought explanations do not always reflect a model's actual computation (Turpin et al., 2023; Lanham et al., 2023), so a declared strategy may be a post-hoc rationalisation rather than a window into decision-making. This study sidesteps the problem by framing the plan as *declared intent*, what the model commits to, not what it internally computes. Whether or not the declaration reflects genuine reasoning, one consequence holds: if strategy declarations vary across runs, clinical responses will also vary.

Three uses follow. The declared strategies enable consistency scoring at the decision level (Method 1), comparing declaration against response enables alignment verification (Method 3), and the plan provides a human-readable summary of the model's intended approach, which is what a clinical overseer would review in deployment.

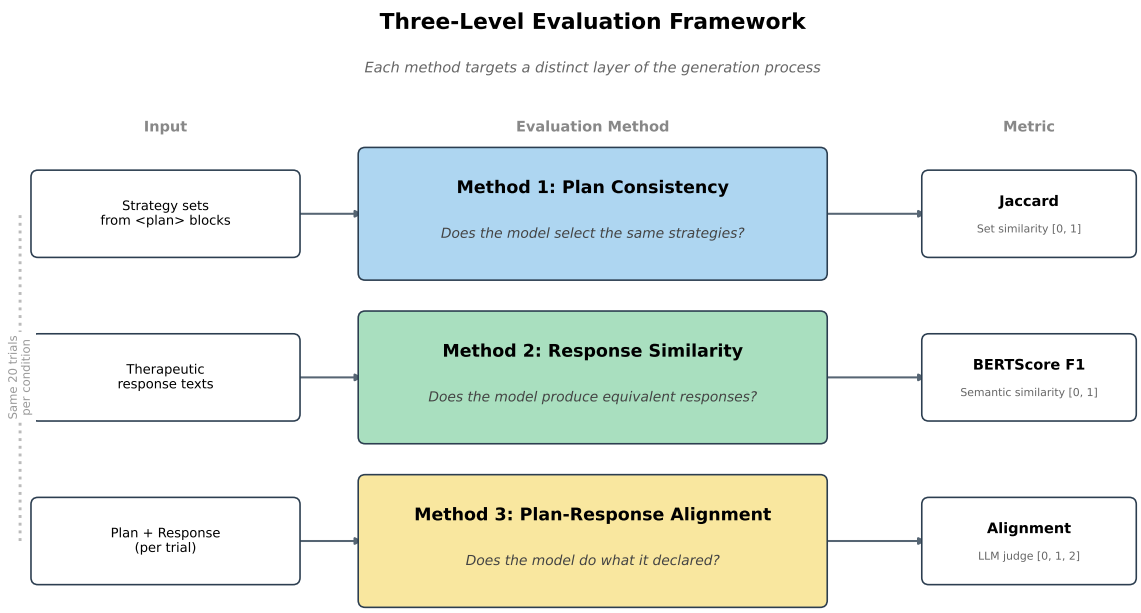


Figure 4: Three-level evaluation framework. Each method targets a distinct layer of the generation process: strategy selection (Jaccard), response wording (BERTScore), and plan–response alignment (LLM judge).

3.6 Strategy Taxonomy

A fixed taxonomy constrains the plan block to a predefined strategy set. The constraint is necessary for quantitative evaluation: free-text plans cannot be aggregated into set-similarity scores. Declarations are limited to six categories describing concrete rescripting *mechanisms*, not therapeutic *goals*: `confrontation` (external action toward the threat), `self_empowerment` (internal transformation), `safety` (environment modification), `cognitive_reframe` (meaning change), `social_support` (adding allies), and `sensory_modulation` (sensory and calming details).

The taxonomy went through four iterations because early goal-level labels produced extreme skew: a single broad "empowerment" category absorbed 87.7% of all picks, since every rescripting intervention serves the goal of increased mastery. Splitting along the mechanism dimension resolved the skew (Appendix A). Avoidance and distancing are deliberately excluded: IRT is understood to work by increasing mastery over the nightmare rather than by avoiding it (Albanese et al., 2022), and rescripted-dream content relates to treatment outcome (Harb et al., 2012). Taxonomy design directly shapes measured consistency, a dependence revisited in Section 6.5.

3.7 Three Evaluation Metrics

Three metrics target distinct layers of the generation process (Figure 4). Method 1 asks whether the model makes consistent therapeutic decisions. Method 2 asks whether it produces consistent therapeutic responses. Method 3 asks whether it does what it says it will do.

3.7.1 Method 1: Plan Consistency

Strategy sets are extracted from the plan block of each trial and compared with pairwise Jaccard similarity, $J(A, B) = |A \cap B|/|A \cup B|$, averaged over all 190 trial pairs per condition. Jaccard is appropriate because strategy combinations are unordered sets: a model that declares *confrontation / cognitive reframe* has made the same clinical decision as one that declares *cognitive reframe / confrontation*. Because the sets contain one or two items drawn from six categories, Jaccard takes only a small number of distinct values (0, 0.33, 0.5, 0.67, 1.0), which motivates the rank-based statistics in Section 4.3. The 190 pairs of a condition derive from the same 20 trials and are therefore not statistically independent. They serve only descriptively: each condition is reduced to a single summary value, and all inferential tests operate on these run-level values. Modal-set agreement, a per-trial statistic free of this dependence, complements the pairwise view (Section 5.2, Appendix E). A plan *validity rate* (fraction of trials whose plan block parses to taxonomy categories) serves as an upstream quality gate.

3.7.2 Method 2: Response Similarity

Pairwise BERTScore F1 (Zhang et al., 2020) is computed over the response texts (plan blocks excluded) across the same 190 pairs. The metric compares contextual embeddings rather than surface tokens, so two responses that apply the same strategy in different words score as similar, where BLEU or ROUGE would penalise the paraphrase. The embedding model is DeBERTa-XLarge-MNLI (He et al., 2021), which ranks first of 130+ candidate models on the BERTScore WMT16 human-correlation benchmark ($r = 0.778$) and whose NLI fine-tuning targets the judgement the metric needs here, whether two sentences mean the same thing.

3.7.3 Method 3: Plan–Response Alignment

An LLM judge scores each declared strategy on a ternary scale: 0 (absent), 1 (partial), 2 (implemented), normalised to $[0, 1]$ per trial. The ternary scale follows clinical fidelity frameworks (ENACT, NIH Behavior Change Consortium), where partial implementation is a clinically meaningful state that binary scoring would lose. The judge is Gemini 3 Flash at T=1.0 (the Gemini 3 default, which Google advises against lowering), with suspect trials re-judged by Gemini 3.1 Pro. Bias mitigations follow established recommendations (Zheng et al., 2023): cross-family judging (no Gemini model appears among the evaluation targets), chain-of-thought justification, and a transparent rubric (Appendix C). NLI cross-encoders were considered and rejected after preliminary testing showed an F1 ceiling near 0.55 on this task.

Judge reliability was validated by human annotation of a stratified random subset of 60 trials scored on the same rubric. Linear-weighted Cohen's κ between human and judge is 0.777 (substantial agreement), with 89.2% exact agreement. All 13 disagreements go in one direction, the human scoring higher than the judge, indicating a conservative rather than lenient judge. Judged trials that fail (timeout or API error) or are unjudgeable (invalid plan) are treated as missing data and excluded from the alignment mean rather than scored zero, since invalid plans are already penalised by the validity rate.

Alignment primarily serves as a validation check: scores near the ceiling confirm that models implement what they declare, validating Jaccard as a measure of genuine decision stability rather than label noise.

4 Experimental Setup

4.1 Models

EU data sovereignty is the primary selection criterion for the study's main subject: the reDreamAI deployment context requires a model that can be self-hosted within EU data residency boundaries (Dale, 2025). At design time that pointed to Mistral Large 3, the EU-sovereign Apache-2.0 flagship. Around it, the comparison set (Table 1) spans a size-class ladder from 24–32B dense models through 70B dense and 119–675B MoE up to two proprietary ceilings. Three scales of Qwen 3.5 probe within-family scaling, OLMo 3.1 provides full training-data provenance, and Llama 3.3 70B maintains continuity with the prior efficacy study. All models run in non-thinking mode. Where a model exposes a configurable reasoning mode, it is explicitly disabled. Mistral Medium 3.5, added after the main collection (below), ultimately overtakes Large 3 as the recommended EU-sovereign candidate (Section 6.2).

Mistral Medium 3.5 (128B dense, open weights under a modified MIT license, released 2026-04-30) was added after the main data collection, using the identical frozen histories, prompts, and analysis pipeline. reDreamAI selected Medium 3.5 as the successor for its chat deployment before any of the stability results reported here existed, on certification grounds: Medium 3.5 offers a better certification framework than Large 3. The stability measurement therefore tests a decision that had already been made. It did not produce it. Independently, the dense architecture raised the expectation of higher run-to-run stability, since a dense forward pass has no expert routing to vary between runs. The addition also serves two methodological purposes: it tests whether the framework extends to a new model with a single configuration entry, and it tests whether the main findings are robust to enlarging the model set (Section 6.4).

Command A (Cohere, 111B dense, non-reasoning variant) was later added by the same single-entry route as a control for the dense-architecture expectation: a second model in the 111–128B dense weight class, from a different vendor, shows whether stability tracks the architecture class or the specific model. All models are accessed through the OpenRouter gateway except GPT-5.4. End-to-end tests of parameter forwarding caught OpenRouter accepting but silently dropping `temperature` for GPT-5.1 and later models, so GPT-5.4 is accessed directly through the native OpenAI API, which validates sampling parameters rather than ignoring them, and its earlier gateway runs are excluded from all analyses (Section 5.7). The proprietary pair was fixed at the main collection in March 2026, when GPT-5.4 and Sonnet 4.6 were their vendors' newest flagship models, and was not updated with later releases. Anthropic models released after Sonnet 4.6, including the entire Claude 5 family, no longer allow `temperature` to be changed, regardless of reasoning mode (Anthropic, 2026), so Sonnet 4.6 is the last Anthropic model that admits a temperature sweep. Newer OpenAI models were not evaluated (Appendix H).

Mistral Large 4 (public preview of 2026-10-06, 1.05T MoE) was collected by the same single-entry route but is not part of the model set. Its 600 trials ran at reasoning effort `none`, which the preview accepted and the released model rejects, so the measured configuration can no longer be requested. The results are reported separately in Appendix I.

4.2 Conditions

The full design crosses 12 models × 6 vignettes × 5 temperatures × 20 trials at slice 2, i.e. 600 trials per model and 7,200 trials in total.

The five-point temperature sweep, $T \in \{0.0, 0.075, 0.15, 0.3, 0.6\}$, is anchored in vendor documentation. T=0.0 (greedy decoding) serves as the deterministic reference, although GPU parallelisation leaves residual floating-point nondeterminism even there (Yuan et al., 2025), which the twenty-trial

Model	Size	License
Mistral Small 3.2	24B dense	Apache 2.0
Mistral Small 4	119B MoE (6.5B act.)	Apache 2.0
Mistral Medium 3.5	128B dense	modified MIT
Mistral Large 3	675B MoE (41B act.)	Apache 2.0
Qwen 3.5 27B	27B dense	Apache 2.0
Qwen 3.5 122B	122B MoE (10B act.)	Apache 2.0
Qwen 3.5 397B	397B MoE (17B act.)	Apache 2.0
OLMo 3.1 32B	32B dense	Apache 2.0 (full provenance)
Llama 3.3 70B	70B dense	Llama license
Command A	111B dense	CC-BY-NC
GPT-5.4	undisclosed	proprietary
Claude Sonnet 4.6	undisclosed	proprietary

Table 1: Evaluation targets (therapist role). All models run in non-thinking mode and are accessed via OpenRouter, except GPT-5.4 (native OpenAI API, Section 4.1). Supporting roles are fixed across all runs: patient = Dolphin Mistral Venice 24B, router = Llama 3.3 70B, judge = Gemini 3 Flash with Gemini 3.1 Pro fallback (no family overlap with any evaluation target).

design captures directly (Blackwell et al., 2024). T=0.15 is the setting on Mistral's model cards: the recommended value for Small 3.2 (Mistral AI, 2025b) and the one in the Large 3 examples, whose card otherwise advises staying below 0.1 (Mistral AI, 2025a). T=0.6 is the Qwen 3.5 and OLMo default, close to the standard Llama chat range. The sweep stops there, below the T=1.0 that the proprietary APIs default to. T=0.3 fills the gap, and T=0.075 was added after an initial four-point run revealed that several models peak in consistency *between* T=0.0 and T=0.15, a pattern examined in Section 5.2.

No reproducibility seed was set, since not all vendors support one and even where available it is best effort at most. A supplementary experiment on Mistral Large 3 confirms this choice: fixing `seed=42` does not improve consistency over unseeded runs (Appendix G). Trial repetition captures the stochastic variance directly.

4.3 Statistical Analysis

The analysis is primarily descriptive, and all tests are exploratory rather than confirmatory: the study describes stability patterns, it does not test a preregistered hypothesis. Spearman rank correlations quantify per-model temperature sensitivity and cross-metric relations (rank-based, because Jaccard takes few discrete values and BERTScore distributions may be non-normal). Kruskal–Wallis H assesses model and vignette differences, with pairwise Mann–Whitney U under Bonferroni correction ($\binom{12}{2} = 66$ comparisons) and η^2 effect sizes alongside p-values.

No fixed threshold defines "stable enough": clinical significance thresholds for LLM stability do not yet exist. Results are interpreted comparatively, model against model and across the temperature sweep, with the random Jaccard baseline (expected value for random 2-of-6 selections, ≈ 0.2) as the lower reference point.

4.4 Reproducibility

Exact model IDs, prompts, and aggregated per-condition results are released with the code at `https://github.com/me-daniel/measure-ai-drift`. The main set was collected 2026-03-21 to

2026-03-24, Mistral Medium 3.5 on 2026-07-09, Command A on 2026-07-28, and the bridge re-collection (Section 5.7) on 2026-07-30. The model set was closed with Command A. Mistral Large 4 was collected on 2026-10-22 and is reported outside the model set (Appendix I). A `run_date` column in the released data records the collection date of every run, and the frozen histories and per-trial raw outputs are available from the author on request. The original collections used OpenRouter with its default provider routing. The later collections pin each model to a single serving provider and reject requests whose parameters cannot be honoured. Because OpenRouter silently drops `temperature` for GPT-5.1 and later, the released GPT-5.4 data come from a re-collection through the direct OpenAI API, which accepts temperature when reasoning is disabled. The judge endpoints are versioned previews. Section 6.6 discusses these caveats.

5 Results

All results are reported at the second rescripting turn (slice 2), aggregated across six vignettes. Statistics are computed over 360 experiment runs (12 models × 6 vignettes × 5 temperatures, 20 trials each). Tests are exploratory. Kruskal–Wallis H is reported with η^2 effect sizes, and pairwise contrasts use Mann–Whitney U with Bonferroni correction over $\binom{12}{2} = 66$ comparisons.

5.1 Plan Validity and Strategy Distribution

Before analysing stability, the plan extraction step must be validated. Models follow the structured format almost without failure: overall validity is 99.8%, with every model at or above 98.3% (Command A lowest; Figure 10), and validity does not vary meaningfully with temperature. The stability metrics below are therefore computed over near-complete data. The seventeen malformed trials are treated as missing data (Section 3.7).

Across 14,361 declared strategy picks, all six taxonomy categories are used, though not uniformly: `sensory_modulation` (26.7%), `cognitive_reframe` (25.4%), and `self_empowerment` (20.0%) dominate, while `safety` (10.4%), `social_support` (9.6%), and `confrontation` (7.9%) form a long tail (Figure 5). No category exceeds a third of picks, in contrast to the 87.7% single-category skew of the initial taxonomy (Appendix A).

These distributional differences are a prerequisite for interpreting the consistency results that follow. A model that always selects the same two strategies will score high on Jaccard regardless of temperature, while a model with a wider repertoire has more room to vary. OLMo 3.1 32B and Qwen 3.5 122B concentrate most (73% and 71% of picks in their top two categories). The proprietary models follow (65–67%), and Command A, Mistral Large 3, and Mistral Small 4 spread widest (46–49%).

5.2 Plan Consistency (Method 1)

Figure 6 presents the headline result: decision-level stability is high but far from universal. Median pairwise Jaccard per run ranges from 1.000 (GPT-5.4, Mistral Medium 3.5, Mistral Small 3.2, OLMo 3.1 32B, Qwen 3.5 122B) down to 0.689–0.727 (Qwen 3.5 397B, Llama 3.3 70B, Qwen 3.5 27B). Even at fixed temperature and identical context, the least stable models change their declared therapeutic strategy in roughly one of three trial pairs.

Temperature degrades decision consistency overall (pooled Spearman $\rho = -0.215$, $p < .001$; Kruskal–Wallis $H(4) = 21.7$, $p < .001$, $\eta^2 = 0.060$): the grand median falls from 0.967 at T=0.0 to 0.747 at T=0.6. But the effect is far from uniform. Per-model correlations separate three groups: OLMo 3.1 32B ($\rho = -0.65$), Qwen 3.5 122B ($\rho = -0.56$), and Qwen 3.5 27B ($\rho = -0.48$) degrade

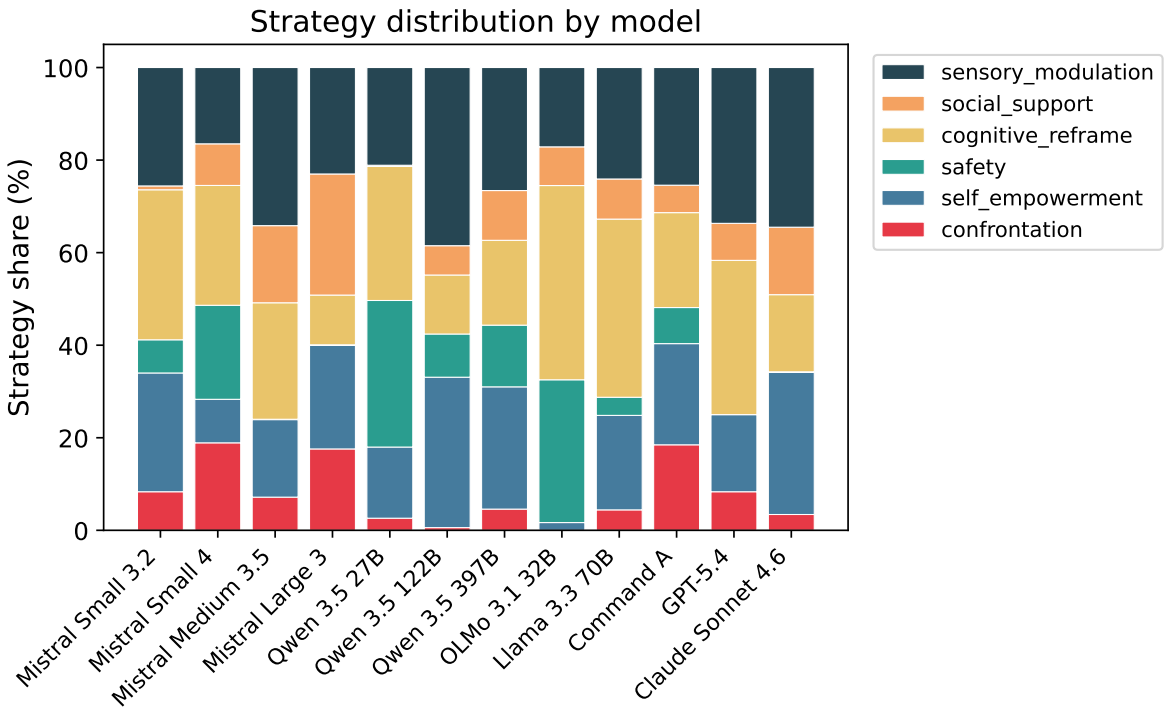


Figure 5: Strategy distribution by model, pooled across temperatures and vignettes. Each bar shows the share of trials selecting each taxonomy category. Models with narrower distributions have less room to vary.

significantly, the Mistral family, Command A, Llama 3.3 70B and Qwen 3.5 397B show no significant trend, and the proprietary ceilings are flat ($\rho = +0.03$ for Sonnet 4.6, $+0.09$ for GPT-5.4). The proprietary models hold their therapeutic decisions stable across the whole sampled range.

Greedy decoding, however, is not always optimal. Ten of the twelve models reach their best mean Jaccard at a non-zero temperature. The pattern is clearest in the Mistral family: Mistral Small 4 rises from 0.777 at T=0.0 to 0.881 at T=0.15 and Mistral Large 3 from 0.796 to 0.848. Llama 3.3 70B shows it too, rising from 0.719 to 0.775 at T=0.075. The two post-hoc additions follow the same pattern: Mistral Medium 3.5 peaks at a perfect 1.000 mean at T=0.075, above its 0.979 at T=0.0, and Command A rises from 0.832 to 0.861 at T=0.15. Whether these differences reflect a genuine benefit of low sampling variance or sample variation ($n = 6$ vignettes per cell) cannot be determined from these results alone, but they are consistent with the low temperatures on Mistral's model cards.

Model differences are substantial (Kruskal–Wallis $H(11) = 104.5$, $p < .001$, $\eta^2 = 0.291$; 20 of 66 Bonferroni-corrected pairs significant). Modal-set agreement tells the same story (Figure 11 in Appendix E). This per-trial statistic, the fraction of trials whose declared set equals the run's most common set, is free of the pairwise dependence noted in Section 3.7. It runs from 0.993 (GPT-5.4) and 0.972 (Mistral Medium 3.5) down to 0.670 (Qwen 3.5 27B).

5.3 Response Similarity (Method 2)

BERTScore F1 measures semantic similarity between the response texts, independent of the plan block. The pooled temperature effect is roughly twice as strong as for Jaccard ($\rho = -0.489$, $p < .001$;

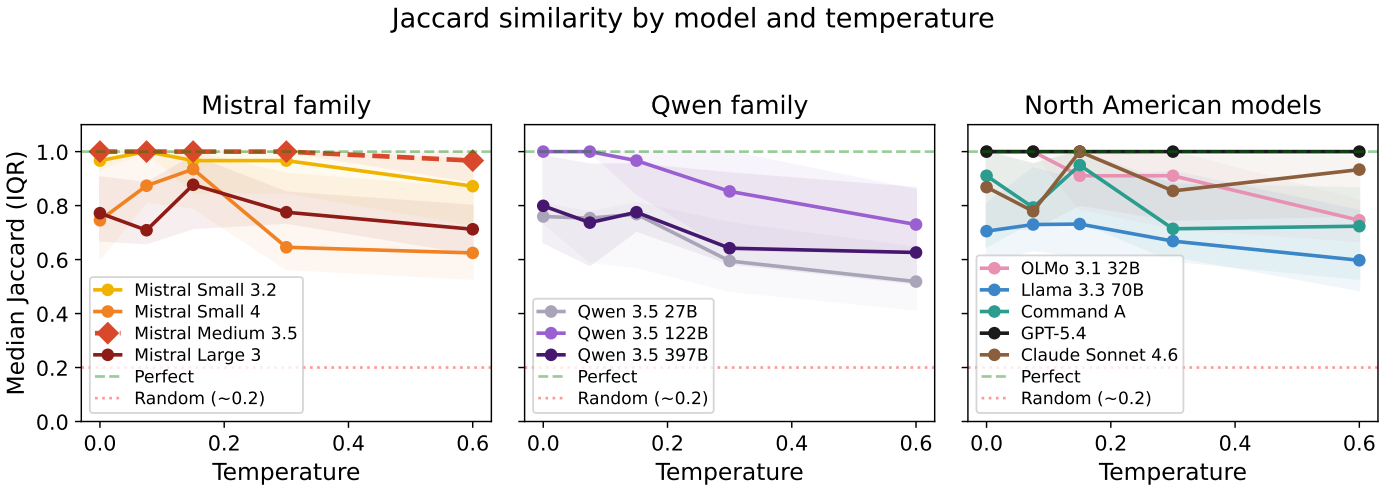


Figure 6: Median pairwise Jaccard by model and temperature, grouped by family. Shaded bands show IQR. The dashed green line marks perfect consistency, the dotted line the random baseline ($J \approx 0.2$). Higher is more consistent.

$H(4) = 93.6$, $p < .001$, $\eta^2 = 0.261$), with the median falling from 0.787 at T=0.0 to 0.705 at T=0.6 (Figure 7). Rising temperature changes response wording before it changes strategy selection: models say the same thing differently before they decide differently. Between-model differences are again large ($H(11) = 92.0$, $p < .001$, $\eta^2 = 0.256$; 19 of 66 pairs significant), with Mistral Medium 3.5 highest (mean F1 0.816) and Mistral Small 4 lowest (0.697).

BERTScore is, however, largely insensitive to strategy changes. A model that switches from *confrontation* to *cognitive reframe* produces surface text similar enough that BERTScore barely registers the difference, since different rescripting strategies share the same conversational framing, sentence length, and register. A per-pair analysis over all 68,400 trial pairs quantifies this. Pairs with identical strategy sets average F1 0.78 against 0.61 for pairs with fully disjoint sets, and within a single model the gap is typically near 0.1, about the size of the buckets' standard deviations. The distributions overlap too heavily for any BERTScore threshold to separate a strategy switch from a change in wording. BERTScore therefore serves as a check on response style rather than as a measure of decision stability.

5.4 Vignette Effects

The data show no evidence that patient presentation drives stability. Vignette differences are significant for neither decision consistency ($H(5) = 6.3$, $p = .280$, $\eta^2 = 0.018$) nor response similarity ($H(5) = 11.0$, $p = .052$, $\eta^2 = 0.031$), although the latter comes closer. Median Jaccard spans a narrow 0.818 (cooperative) to 1.000 (anxious, skeptic). With six vignettes the test is underpowered, so this is an absence of evidence for a vignette effect rather than evidence of invariance. Individual model–vignette combinations do deviate from the aggregate, which keeps per-vignette reporting useful for spotting where a specific model breaks down. The full per-vignette heatmaps appear in Appendix F.

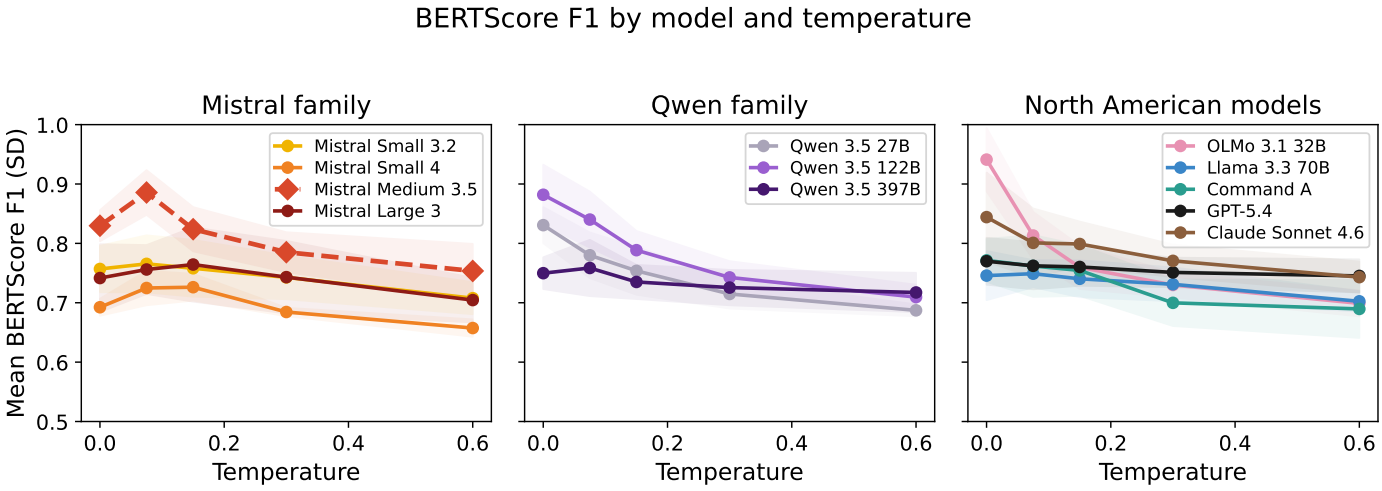


Figure 7: Pairwise BERTScore F1 by model and temperature, grouped by family.

5.5 Cross-Metric Relations

The three methods are related but not redundant. Decision- and response-level consistency correlate moderately (Spearman $\rho = 0.552$, $p < .001$, $n = 360$): models with more consistent strategy selection also tend to produce more similar text, but not strongly enough for one metric to substitute for the other. Alignment correlates only weakly with Jaccard ($\rho = 0.293$) and moderately with BERTScore ($\rho = 0.403$), consistent with its role as a near-ceiling validation check rather than a third stability axis.

Figure 8 shows how the models arrange on the two stability axes. Mistral Medium 3.5 anchors the upper right, five models sit at perfect median decision consistency with clearly different response-level scores, and Qwen 3.5 27B occupies the lower left. Mistral Small 4 combines moderate decision consistency with the lowest response similarity in the set, so even when it selects the same strategies, its wording varies considerably.

5.6 Plan–Response Alignment (Method 3)

Models largely do what they declare. Mean alignment ranges from 1.000 (GPT-5.4 and Sonnet 4.6) down to 0.810 (Mistral Small 4), and it is temperature-independent ($\rho = -0.069$, $p = .19$). Models do not get worse at implementing their declared strategies as temperature rises: they select *different* strategies more often (lower Jaccard) but implement whichever strategy they select equally well (Figure 9).

Model differences on alignment are nonetheless the largest of the three metrics ($H(11) = 155.8$, $p < .001$, $\eta^2 = 0.434$; 34 of 66 pairs significant), driven by the gap between the proprietary ceilings (1.000) and the weaker open models. The near-ceiling scores validate Method 1: declared plans are implemented, so Jaccard measures decisions. Of the 7,200 trials, none failed with judge errors, 17 were unjudgeable (invalid plans, 10 of them Command A's, excluded as missing data), and 9 (0.13%) were re-judged by the Gemini 3.1 Pro fallback.

5.7 Robustness to Model Additions and Serving Regime

The first post-hoc addition lands at the top of the stability ranking. Mistral Medium 3.5 attains a perfect median Jaccard of 1.000, the highest mean BERTScore F1 in the set (0.816), the second-

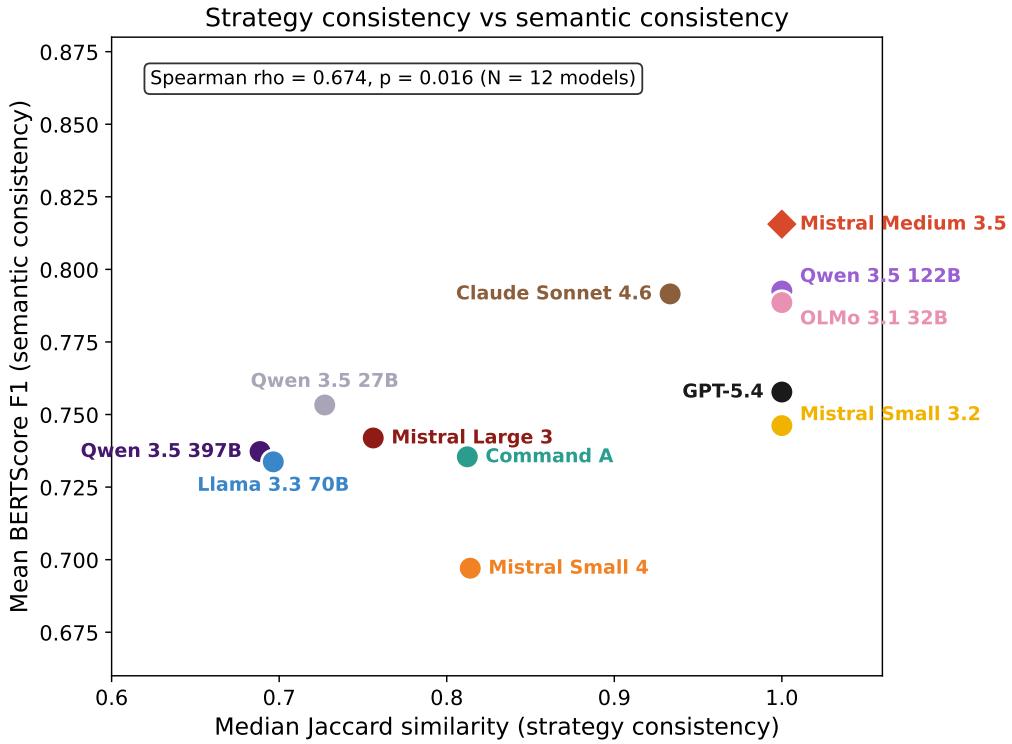


Figure 8: Plan consistency (median Jaccard) versus response similarity (mean BERTScore F1) per model, pooled across temperatures and vignettes.

highest modal-set agreement (0.972), perfect plan validity, and mean alignment of 0.961 across its 30 conditions. Its Jaccard profile stays at or near ceiling across all five temperatures. This ceiling is not the sampling artefact diagnosed for GPT-5.4 below: Medium 3.5's BERTScore falls by 0.13 across the sweep ($\rho = -0.66$), steeper than both proprietary models, so temperature reaches the model and it is the decisions that hold still while the wording drifts. Its consistency does not come from a narrow repertoire either: its pooled strategy distribution is broader than that of the proprietary models (59% top-two share), so its selections vary across patients but not across runs of the same patient.

The second addition behaves like an ordinary mid-field model. Command A combines one of the broadest strategy repertoires in the set (47% top-two share) with mid-ranking decision consistency (median Jaccard 0.812), a genuine temperature response, and the low-temperature optimum seen across most of the set, at T=0.15. As a new model, however, it cannot separate regime effects from model effects, which the bridge re-collection below addresses directly.

The GPT-5.4 re-collection confirms the flat profile. With temperature verifiably applied, GPT-5.4's mean decision consistency stays between 0.970 and 1.000 at every sampled temperature while its BERTScore declines from 0.770 to 0.745, the same decisions-stable-wording-drifts signature as Sonnet 4.6. The flat profile that the original collection produced for the wrong reason (the parameter was never applied) turns out to be genuine: GPT-5.4 is the most decision-stable model in the set (modal-set agreement 0.993), and its stability survives real sampling variance rather than reflecting its absence. At the trial level the two proprietary ceilings differ in kind. GPT-5.4 produces a single strategy set across all 20 trials in 28 of its 30 conditions, whereas Sonnet 4.6 produces two or three distinct sets in roughly half of its conditions at every temperature, including T=0.0. The two models

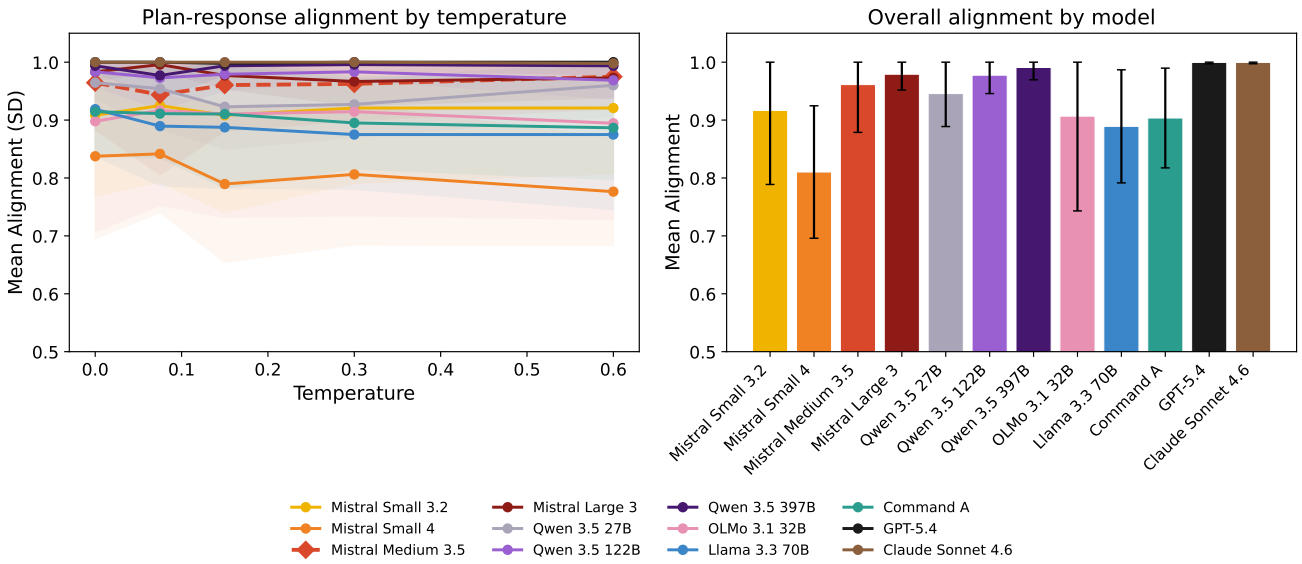


Figure 9: Plan–response alignment by model.

are equally aligned (1.000) but differently deterministic, and Sonnet's non-monotonic median profile in Figure 6 reflects this temperature-independent baseline stochasticity passed through a median over six vignettes, not a temperature effect ($\rho = +0.03$, $p = .88$).

A bridge re-collection tests the regime difference directly. Mistral Large 3 and Qwen 3.5 27B, drawn from the mid-field and the bottom of the original consistency ranking, were re-run four months later under the stricter regime (pinned first-party provider, enforced parameter forwarding) on the identical frozen histories, without alignment judging. Both become more stable. Mistral Large 3's pooled median Jaccard rises from 0.756 to 0.904 while its shape is preserved: it keeps a genuine temperature response and its low-temperature optimum, now at T=0.075. Qwen 3.5 27B changes category. The least stable model of the original cohort (pooled median 0.727, median 0.518 at T=0.6) is ceiling-stable under pinned serving, with median Jaccard 1.000 and modal-set agreement at or near 1.000 at every temperature. Its BERTScore still falls from 0.952 to 0.854 across the sweep, so temperature reaches the model.

Two further re-runs bound the effect. Mistral Small 4 and Qwen 3.5 122B reproduce their original temperature profiles under pinning almost exactly (pooled medians unchanged at 0.814 and 1.000), so the regime effect is model-specific rather than universal, and their measured instability is intrinsic.

The comparison is confounded with time, since four months of serving-stack changes lie between the collections and the original trials did not record which provider served them. The two models also differ in how much routing variance the default regime could have exposed them to. At the time of writing, OpenRouter lists six endpoints for Qwen 3.5 27B, spanning fp8, bf16, and undisclosed quantisations, but only the first-party endpoint for Mistral Large 3, whose lift may therefore be largely temporal. The bridge pins each model to its first-party endpoint (Mistral, and Alibaba at fp8), so Qwen 3.5 27B's ceiling under consistently quantised serving also shows that quantisation as such does not cause the instability. Variation between stacks, or the four months between the collections, is the more likely source. A substantial share of the instability measured under default routing is a property of the serving infrastructure rather than the model weights alone, with consequences for the cross-regime portion of the ranking taken up in Sections 6.2 and 6.6.

Each enlargement tightens the Bonferroni correction, from $\binom{10}{2} = 45$ to $\binom{11}{2} = 55$ and now $\binom{12}{2} = 66$ comparisons. The two steps moved two marginal pairs below significance (Jaccard: Llama 3.3 70B vs. Qwen 3.5 122B, p_{bonf} 0.046 → 0.067; BERTScore: Mistral Small 3.2 vs. Sonnet 4.6, 0.035 → 0.051). No pairwise conclusion among unchanged models reversed direction and none became newly significant. All substantive findings of the original study hold under model-set enlargement and under the GPT-5.4 correction. Mistral Large 4, collected later still, lies outside the model set and is reported in Appendix I.

6 Discussion

6.1 What the Three Levels Reveal Together

The three methods were designed to capture distinct aspects of therapeutic stability, and the moderate cross-metric correlations confirm that they do. The most informative finding comes from their separation.

Temperature reduces Jaccard but leaves alignment untouched. Models select different strategies as temperature rises, yet implement whichever strategy they select equally well. This pattern localises the source of instability to the *decision-making* layer rather than the *execution* layer. A model at high temperature does not produce incoherent or unfaithful responses. It produces coherent responses to a different therapeutic plan. If models selected consistent strategies but failed to carry them out, the remedy would lie in response generation and prompt design. The observed pattern is the opposite, so temperature and decoding policy are the more promising levers, and an evaluation that reads only the response text is looking at the wrong layer.

BERTScore illustrates the problem. Response similarity falls with temperature roughly twice as fast as decision consistency ($\rho = -0.49$ vs. -0.22), so wording varies before decisions do, and evaluations that compare only output text conflate harmless paraphrase with genuine decision churn. In the other direction, different rescripting strategies share the same supportive framing and register, so a genuine strategy switch often leaves BERTScore unmoved. Both follow from how therapeutic language is structured, not from a flaw in BERTScore. The plan mechanism separates the two layers at the cost of one structured line per response, and the near-ceiling validity shows that every model can follow the format.

Finally, the near-ceiling alignment scores validate the framework's central simplification. Because plans are faithfully executed, Jaccard over declared strategy sets measures actual decision stability rather than label noise. Decision instability is real and model-specific: at validity of 98% or more and alignment near ceiling, the least stable models are not failing to follow the format or to implement their plans. They are changing their minds. In deployment terms, two patients with the same presentation, or the same patient after a page reload, can receive different therapeutic strategies for no clinical reason.

6.2 Cross-Model Comparison and EU-Sovereign Deployment

Does an EU-sovereign model achieve therapeutic stability comparable to proprietary alternatives? For the original study subject, the answer was a qualified yes. At T=0.15, the setting of its model-card examples, Mistral Large 3 reaches a mean Jaccard of 0.848, against 1.000 for GPT-5.4 and 0.907 for Sonnet 4.6. At T=0.6 the gap grows: Mistral Large 3 falls to 0.700 while the proprietary models stay at 0.87 or above.

The post-hoc addition changes the picture outright. Mistral Medium 3.5, open weights, EU-sovereign, dense 128B, is the most stable model overall: perfect median decision consistency, the

highest response-level consistency, and second only to GPT-5.4 on modal-set agreement. For deployments in which run-to-run consistency of clinical decisions is the binding constraint, these results support Medium 3.5 over Large 3 as the preferred EU-sovereign candidate. They corroborate reDreamAI's earlier successor decision (Section 4.1). The scope of this claim is narrow: stability is necessary, not sufficient. This study measures neither therapeutic quality nor efficacy, and Medium 3.5's alignment (0.961) still trails the proprietary ceilings (1.000). The sovereignty conclusion nonetheless strengthens: at the time of the main collection the most stable models were mixed across origins, and with Medium 3.5 an EU-sovereign open-weight model tops the stability ranking.

Parameter count does not straightforwardly predict stability: Qwen 3.5 122B outperforms its 397B sibling at every temperature point, and two of the three 24–32B dense models (Mistral Small 3.2, OLMo 3.1) sit at or near the top of the ranking at low temperatures. The 111–128B dense pair is the clearest case: Command A and Mistral Medium 3.5 are near neighbours in parameter count yet occupy the mid-field and the ceiling of the consistency ranking respectively. The dense-architecture expectation that motivated the pair (Section 4.1) is therefore not supported in its strong form, since dense weights alone do not confer stability. The pair also differs by about a year (Command A March 2025, Medium 3.5 April 2026), so the comparison cannot separate vendor from training generation. The proprietary models show the flattest temperature profiles but are not in a class of their own. Part of the explanation is distributional, since models that concentrate on a narrow strategy repertoire have less room to vary (Section 5.1). Mistral Medium 3.5 is the counterexample. It combines a broad repertoire with perfect within-condition consistency, adapting its strategy to the patient but not to sampling noise.

6.3 Temperature and Clinical Deployment

The five-point sweep shows that the relationship between temperature and stability is not monotonic for all models. Ten of twelve models reach their best mean decision consistency at a non-zero temperature, and the Mistral models peak between T=0.075 and T=0.15, at the low end of what their model cards recommend. Pushing a model to T=0.0 in the hope of maximising determinism can be counterproductive, and greedy decoding in any case does not deliver determinism: residual nondeterminism persists at T=0.0 (Yuan et al., 2025), and a fixed seed does not remove it (Appendix G).

The practical recommendation is to verify stability for the specific model at the intended temperature. Neither greedy decoding nor the vendor default guarantees it. Ten of twelve models are least consistent at T=0.6, whether that is their vendor default (Qwen 3.5, OLMo 3.1) or four times the value on their model card (Mistral Small 3.2, Large 3), so that T=0.15 sits in the stable region because it is low. Only three models degrade significantly across the sweep (OLMo 3.1 32B, Qwen 3.5 122B, Qwen 3.5 27B). A well-chosen temperature does not make an unstable model stable, because the stable-at-any-temperature property itself separates models. Alignment softens the concern: the clinical cost of higher temperature is confined to strategy *selection*. A patient of a high-temperature model would encounter different therapeutic approaches across sessions, but each individual session would be internally coherent.

6.4 Robustness and Extensibility

Adding Mistral Medium 3.5 after the main data collection required a nine-line entry in the model registry (ID, temperature, reasoning mode). No metric, aggregation, or statistical-test code changed. The 600-trial collection ran unattended in 8 h 20 min of wall-clock time on the identical frozen histories. Command A later required the same single registry entry, and moving GPT-5.4 from the

gateway to the native OpenAI API was a provider swap within its existing entry. The two additions also serve as a robustness check: Section 5.7 shows that all substantive findings survive them, with two marginal Bonferroni boundary crossings in total. A third collection, Mistral Large 4, used the same route and is reported outside the model set (Appendix I).

An aggregation gateway can accept a sampling parameter and silently drop it: the request succeeds, the response is fluent, and nothing in any single output reveals that the sweep never varied. Only the stability measurement itself exposed the failure, as a BERTScore profile flat to within 0.006 while every genuinely responding model declined by 0.03 to 0.24 over the same sweep. Studies that manipulate sampling parameters through an intermediary should verify end to end that the parameters reach the model, pin the serving provider, and configure requests to fail rather than proceed when an endpoint cannot honour a parameter. This study's later collections adopt exactly that policy (Section 4.1).

6.5 Framework Reflections

The consistency scores depend on how strategies are categorised. Broader categories inflate Jaccard because more selections land in the same bin, finer categories deflate it. The six-category taxonomy balances clinical detail against discriminability, but different category boundaries would shift the absolute numbers. The relative ordering of models is more robust, since all models are evaluated against the same set.

The plan block also has limits. It captures what the model declares, not what it internally computes, and it cannot tell apart a model that picks a strategy and then writes the response from one that writes a response and then picks a matching label. The high alignment scores fit either reading. What matters for the clinical argument is that declarations vary across runs, and that variation predicts variable therapeutic behaviour regardless of the underlying process.

Beyond IRT, the framework carries over to any structured protocol where the therapist chooses from a defined set of techniques. Cognitive behavioural therapy and motivational interviewing are natural candidates. Each would need its own strategy taxonomy, but the evaluation setup and metrics transfer unchanged.

6.6 Limitations

All patient interactions are simulated. Synthetic patients follow scripted behavioural profiles and do not exhibit the unpredictable responses of real patients, and six profiles sample the difficulty range without exhausting it. No human participants were involved, so the results measure computational consistency rather than clinical safety or efficacy. IRT targets nightmares rather than psychiatric diagnoses, which limits clinical risk, but any deployment to real patients would require validation beyond what this framework provides.

The study evaluates a single phase (rescripting) of a single protocol, at a single conversation depth (slice 2, where a single-model pilot showed the lowest consistency). Whether that depth profile generalises beyond the pilot model is untested, and stability in other IRT stages, at other depths, or in other protocols may differ.

The measurement itself carries residual variance from the serving side. The original collections used OpenRouter's default routing, under which the third-party serving stack (provider, quantisation, batching) may differ between requests. The later collections pin one provider per model and log it per trial, but the two regimes are not identical. The bridge re-collection shows this is not a formality (Section 5.7): under pinned serving Qwen 3.5 27B moves from the bottom of the consistency ranking to the ceiling, so scores measured under default routing bundle model and serving variance, and

comparisons across the two regimes, including the top of the overall ranking, inherit that confound. Comparisons within a regime are unaffected.

The judge endpoints are versioned previews whose revision may likewise differ between collections, and the human validation ($\kappa = 0.777$) covers 60 trials, below 1% of the total. The judge is also itself stochastic, since Gemini 3 requires T=1.0 and each trial is judged once. A seeded re-judging of one trial per run (360 trials) reproduces 96.2% of strategy scores exactly (linear-weighted $\kappa = 0.807$) with no directional drift (Appendix C), which bounds this variance without removing it. Judge reliability at scale remains an open question (Zheng et al., 2023).

Finally, the taxonomy constrains what can be measured, and the statistics are exploratory. Strategies outside the six categories are invisible to Method 1, different category boundaries would produce different absolute scores, and with 30 runs per model the Bonferroni-corrected pairwise tests are conservative.

7 Conclusion

This paper asked how consistent LLM therapeutic responses are across independent runs within a structured IRT protocol. Three evaluation methods were applied to twelve models across 7,200 trials spanning five temperature conditions, on frozen histories that make every trial's input byte-identical.

The main findings are:

1. Consistency varies widely across models. Median decision consistency spans 0.69 to 1.00 between models, while the six patient vignettes show no significant effect, an absence of evidence rather than demonstrated invariance.

2. The instability sits in strategy selection, not execution. Temperature reduces plan consistency but not plan–response alignment: models pick different strategies at higher temperatures but carry out whichever strategy they pick equally well.

3. Greedy decoding is not reliably optimal. Ten of twelve models reach their best mean consistency at a low non-zero temperature, and the Mistral models peak at the low end of what their model cards recommend, though with six vignettes per condition these optima are suggestive rather than confirmed. Deployments should verify stability at the intended setting rather than assume T=0.0 is safest.

4. No single metric captures the full picture. The three levels correlate only moderately ($\rho = 0.29$ to 0.55). BERTScore misses strategy changes and overstates drift from harmless paraphrase, and only the combination localises where instability lives.

5. The framework is cheap to extend, and the findings are robust to model-set changes. Adding a model requires a single configuration entry on identical frozen inputs, the framework's own stability signature exposed a gateway silently dropping GPT-5.4's temperature parameter, and every substantive finding holds across these revisions. Mistral Medium 3.5, an EU-sovereign open-weight model, tops the overall stability ranking.

The three-level framework fulfilled its design goal by identifying that instability concentrates at the strategy selection layer. Neither BERTScore nor alignment alone would have revealed that. The cross-model comparison shows that EU-sovereign deployment no longer requires a stability compromise: the small gap Mistral Large 3 left at low temperature closes with Mistral Medium 3.5, which tops the ranking.

Several directions follow. Extending the evaluation beyond the rescripting phase would test whether the patterns hold across different types of clinical decisions, and the framework transfers to other manualised protocols (CBT, motivational interviewing) given a protocol-specific taxonomy. Since vendors update weights and serving infrastructure without notice, repeating the evaluation across model versions would show whether stability improves or fluctuates over release cycles. reDreamAI targets German-speaking users, so evaluating stability in German would test whether the English-language patterns transfer. A larger human annotation study would strengthen the judge validation beyond the current 60-trial subset. Finally, because consistency is necessary but not sufficient, the natural companion to this framework is an evaluation of therapeutic quality: a model must make the same decision every time, and it must be the right one.

Ethics Statement

All patient interactions in this study are simulated. The six patient vignettes are synthetic behavioural profiles, no human participants were involved, and no real patient data were processed. The vignette design was informed by anonymised session data from a prior efficacy study, but no real transcripts were used. The results measure computational consistency, not clinical safety or efficacy, and do not support deploying any evaluated model to real patients without clinical validation.

References

M. Aboy, T. Minssen, and E. Vayena. Navigating the EU AI act: Implications for regulated digital medical products. *npj Digital Medicine*, 7:237, 2024.

M. Albanese, M. Liotti, L. Cornacchia, and F. Mancini. Nightmare rescripting: Using imagery techniques to treat sleep disturbances in post-traumatic stress disorder. *Frontiers in Psychiatry*, 13:866144, 2022. doi: 10.3389/fpsyt.2022.866144.

Anthropic. Claude Sonnet 5, 2026. URL https://platform.claude.com/docs/en/models/sonnet-5/overview.

A. J. Bellg, B. Resnick, D. S. Minicucci, G. Ogedegbe, D. Ernst, B. Borrelli, J. Hecht, M. Ory, D. Orwig, and S. Czajkowski. Enhancing treatment fidelity in health behavior change studies: Best practices and recommendations from the NIH behavior change consortium. *Health Psychology*, 23(5):443–451, 2004.

Robert E. Blackwell, Jon Barry, and Anthony G. Cohn. Towards reproducible LLM evaluation: Quantifying uncertainty in LLM benchmark scores. *arXiv preprint arXiv:2410.03492*, 2024. doi: 10.48550/arXiv.2410.03492.

Y. Y. Chiu, A. Sharma, I. W. Lin, and T. Althoff. A computational framework for behavioral assessment of LLM therapists. *arXiv preprint*, 2024. doi: 10.48550/arXiv.2401.00820.

R. Dale. Sovereign AI in 2025. *Natural Language Processing*, 31:1312–1321, 2025.

K. K. Fitzpatrick, A. Darcy, and M. Vierhile. Delivering cognitive behavior therapy to young adults with symptoms of depression and anxiety using a fully automated conversational agent (Woebot): A randomized controlled trial. *JMIR Mental Health*, 4(2):e19, 2017.

G. C. Harb, R. Thompson, R. J. Ross, and J. M. Cook. Combat-related PTSD nightmares and imagery rehearsal: Nightmare characteristics and relation to treatment outcome. *Journal of Traumatic Stress*, 25(5):511–518, 2012. doi: 10.1002/jts.21748.

P. He, X. Liu, J. Gao, and W. Chen. DeBERTa: Decoding-enhanced BERT with disentangled attention. In *International Conference on Learning Representations*, 2021. URL https://openreview.net/forum?id=XPZIaotutsD.

M. V. Heinz, D. M. Mackin, B. M. Trudeau, S. Bhattacharya, Y. Wang, H. A. Banta, A. D. Jewett, A. J. Salzhauer, T. Z. Griffin, and N. C. Jacobson. Randomized trial of a generative AI chatbot for mental health treatment. *NEJM AI*, 2(4), 2025. doi: 10.1056/AIoa2400802.

Z. Iftikhar, A. Xiao, S. Ransom, J. Huang, and H. Suresh. How LLM counselors violate ethical standards in mental health practice: A practitioner-informed framework. volume 8, page 1311, 2025. doi: 10.1609/aies.v8i2.36632.

B. A. Kohrt, M. J. D. Jordans, S. Rai, P. Shrestha, N. P. Luitel, M. K. Ramaiya, D. R. Singla, and V. Patel. Therapist competence in global mental health: Development of the ENhancing assessment of common therapeutic factors (ENACT) rating scale. *Behaviour Research and Therapy*, 69:11–21, 2015.

B. Krakow, R. Kellner, D. Pathak, and L. Lambert. Imagery rehearsal treatment for chronic nightmares. *Behaviour Research and Therapy*, 33(7):837–843, 1995.

B. Krakow, M. Hollifield, L. Johnston, M. Koss, R. Schrader, T. D. Warner, and H. Prince. Imagery rehearsal therapy for chronic nightmares in sexual assault survivors with posttraumatic stress disorder. *JAMA*, 286(5):537–545, 2001.

T. Lanham, A. Chen, A. Radhakrishnan, B. Steiner, C. Denison, D. Hernandez, and E. Perez. Measuring faithfulness in chain-of-thought reasoning. *arXiv preprint*, 2023.

Shirley Xin Li, Bin Zhang, Albert Martin Li, and Yun Kwok Wing. Prevalence and correlates of frequent nightmares: A community-based 2-phase study. *Sleep*, 33(6):774–780, 2010. doi: 10.1093/sleep/33.6.774.

Mistral AI. Mistral-Large-3-675B-Instruct-2512: Model card, 2025a. URL https://huggingface.co/mistralai/Mistral-Large-3-675B-Instruct-2512.

Mistral AI. Mistral-Small-3.2-24B-Instruct-2506: Model card, 2025b. URL https://huggingface.co/mistralai/Mistral-Small-3.2-24B-Instruct-2506.

Mistral AI. Reasoning, 2026. URL https://docs.mistral.ai/studio/conversations/reasoning.

T. I. Morgenthaler, S. Auerbach, K. R. Casey, D. Kristo, R. Maganti, K. Ramar, and R. Zak. Position paper for the treatment of nightmare disorder in adults. *Journal of Clinical Sleep Medicine*, 14(6):1041–1055, 2018.

C. T. Mowbray, M. C. Holter, G. B. Teague, and D. Bybee. Fidelity criteria: Development, measurement, and validation. *American Journal of Evaluation*, 24(3):315–340, 2003.

Jekaterina Novikova, Carol Anderson, Borhane Blili-Hamelin, Domenic Rosati, and Subhabrata Majumdar. Consistency in language models: Current landscape, challenges, and future directions. In *ICML 2025 Workshop*, 2025. doi: 10.48550/arXiv.2505.00268.

M. Renze. The effect of sampling temperature on problem solving in large language models. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 7346–7356, 2024. doi: 10.18653/v1/2024.findings-emnlp.432. URL https://aclanthology.org/2024.findings-emnlp.432/.

Nils Sandman, Katja Valli, Erkki Kronholm, Hanna M. Ollila, Antti Revonsuo, Tiina Laatikainen, and Tiina Paunio. Nightmares: Prevalence among the Finnish general adult population and war veterans during 1972–2007. *Sleep*, 36(7):1041–1050, 2013. doi: 10.5665/sleep.2806.

E. C. Stade, S. Wiltsey Stirman, L. H. Ungar, C. L. Boland, H. A. Schwartz, D. B. Yaden, J. Sedoc, R. J. DeRubeis, R. Willer, and J. C. Eichstaedt. Large language models could change the future of behavioral healthcare: A proposal for responsible development and evaluation. *npj Mental Health Research*, 3:12, 2024.

M. Turpin, J. Michael, E. Perez, and S. R. Bowman. Language models don't always say what they think: Unfaithful explanations in chain-of-thought prompting. In *Advances in Neural Information Processing Systems*, volume 36, 2023.

H. van Kolfschooten and J. van Oirschot. The EU artificial intelligence act (2024): Implications for healthcare. *Health Policy*, 149:105152, 2024.

Julia Voss, Madlen Peters, Gordon Pipa, and Katharina Lüth. Efficacy of a web application as a self-help intervention for nightmares: A randomized controlled trial. *Somnologie*, 2026. doi: 10.1007/s11818-026-00550-w. Online first.

R. Wang, S. Milani, J. C. Chiu, J. Zhi, S. M. Eack, T. Labrum, S. M. Murphy, N. Jones, K. V. Hardy, H. Shen, F. Fang, and Z. Chen. PATIENT-ψ: Using large language models to simulate patients for training mental health professionals. 2024a.

Z. Wang, J. Wu, Y. Li, J. Xu, and H. Zhang. Roleplay-doh: Enabling domain-experts to create LLM-simulated patients via eliciting and adhering to principles. *arXiv preprint*, 2024b.

J. Wei, X. Wang, D. Schuurmans, M. Bosma, B. Ichter, F. Xia, E. Chi, Q. V. Le, and D. Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in Neural Information Processing Systems*, volume 35, 2022.

Joseph Weizenbaum. ELIZA—a computer program for the study of natural language communication between man and machine. *Communications of the ACM*, 9(1):36–45, 1966. doi: 10.1145/365153.365168.

Y. Wu, H. Song, C. Ye, R. Lin, W. Huang, Y. Wang, and X. Yang. A pilot randomized controlled trial of AI-delivered vs. human-delivered iCBT for depression in young adults. *BMC Psychiatry*, 2026. doi: 10.1186/s12888-026-07925-1.

Weijia Xu, Nebojsa Jojic, Sudha Rao, Chris Brockett, and Bill Dolan. Echoes in AI: Quantifying lack of plot diversity in LLM outputs. *Proceedings of the National Academy of Sciences*, 122(35): e2504966122, 2025. doi: 10.1073/pnas.2504966122.

Jiayi Yuan, Hao Li, Xinheng Ding, Wenya Xie, Yu-Jhe Li, Wentian Zhao, Kun Wan, Jing Shi, Xia Hu, and Zirui Liu. Understanding and mitigating numerical sources of nondeterminism in LLM inference. In *Advances in Neural Information Processing Systems*, 2025. doi: 10.48550/arXiv.2506.09501.

T. Zhang, V. Kishore, F. Wu, K. Q. Weinberger, and Y. Artzi. BERTScore: Evaluating text generation with BERT. In *International Conference on Learning Representations*, 2020.

Y. Zhang, Y. Liu, S. Wang, Y. Li, J. Xu, and G. Bi. PsyEval: A suite of mental health related tasks for evaluating large language models. 2024.

L. Zheng, W.-L. Chiang, Y. Sheng, S. Zhuang, Z. Wu, Y. Zhuang, and I. Stoica. Judging LLM-as-a-judge with MT-Bench and chatbot arena. In *Advances in Neural Information Processing Systems*, volume 36, 2023.

A Strategy Taxonomy

The six mechanism-level categories that constrain plan declarations:

Category	Mechanism
`confrontation`	External action toward the threat (fight, challenge, resist)
`self_empowerment`	Internal transformation (grow stronger, gain abilities)
`safety`	Environment modification (safe spaces, protective elements)
`cognitive_reframe`	Meaning change (reinterpret threatening elements)
`social_support`	Adding allies (introduce helpful figures)
`sensory_modulation`	Sensory and calming details (modify light, sound, texture; introduce comforting elements)

Table 2: Final strategy taxonomy (v4).

The taxonomy evolved over four iterations ($8 \to 6 \to 7 \to 6$ categories). The initial version suffered a severe skew: a broad empowerment/mastery category absorbed 87.7% of all picks. Merging it made the skew worse (100% dominance of a single "agency" category). The resolution was a mechanism-level split distinguishing external action (`confrontation`) from internal transformation (`self_empowerment`). A seventh category (`emotional_regulation`) was merged into `sensory_modulation` after smoke testing showed it was picked in 0.4% of trials. Category definitions describe *how* the dream changes (mechanism), not what the change achieves (outcome), with NOT-examples to reduce overlap.

B Prompts

The fused-generation system prompt injected into each trial (the `{categories_block}` placeholder is filled with the six taxonomy definitions of Appendix A):

```
You are an Imagery Rehearsal Therapy (IRT) assistant helping a patient rescript
their nightmare.
First, select 1-2 therapeutic strategies from this taxonomy:
{categories_block}
Choose the strategies most specifically suited to THIS patient's nightmare
content.  Avoid defaulting to general approaches when a more specific mechanism
fits.
Then respond to the patient using those strategies.
STRICT output format:
```

```
Line 1:  <plan>category1 / category2</plan>
Line 2:  (empty)
Line 3+:  Your therapeutic response (conversational, supportive, max 3
sentences)
IMPORTANT:
- You MUST include the closing </plan> tag on the SAME line as the opening tag.
- The <plan> line must contain ONLY category names, nothing else.
- Do NOT put your response inside the <plan> tags.
```

An in-context example provided with the prompt:

```
<plan>safety / social_support</plan>
What if, in this version of the dream, you could find a place that feels
completely secure -- and someone you trust is already there waiting for you?
```

Each trial receives this system prompt together with the frozen dialogue history (slice 2 of the vignette's generated session), so all trials of a condition share byte-identical input.

C Judge Rubric

The alignment judge receives the taxonomy definitions, the trial's declared strategies, and the therapist response, and scores each declared strategy on a ternary scale with mandatory reasoning:

```
For each declared strategy, assign ONE score:
- 2 (implemented):  The response clearly and specifically implements this
strategy.  The therapeutic technique is evident and developed -- you can point
to specific sentences or passages that demonstrate it.
- 1 (partial):  The response touches on this strategy but does not fully
develop it.  Elements are present but incomplete, only implied, or mentioned
without therapeutic depth.
- 0 (absent):  The response does not implement this strategy.  No evidence of
this technique in the response.
Output format:  strategy_id:  <reasoning> | score:  <0|1|2>
```

Per-trial alignment is the mean score over declared strategies, normalised by the maximum (2). Trials whose judgment fails (timeout, API error) or that cannot be judged (invalid plan) are treated as missing data and excluded from the alignment mean. Zero-scored or partially parsed judgments are re-judged once by Gemini 3.1 Pro (9 of 7,200 trials; Section 5.6).

Because the judge runs at T=1.0 and scores each trial once, a re-judging control quantifies its own sampling variance: one seeded trial per run (360 trials) was re-judged with the identical setup. Strategy-level exact agreement is 96.2% (720 score pairs, linear-weighted $\kappa = 0.807$), 93.1% of trials keep their alignment value unchanged, and the mean signed difference is -0.003. Disagreement concentrates in the partial category (score 1), while full implementation (score 2) reproduces at 98.2%. Single judgments are therefore noisy at the implemented–partial boundary but not biased.

D Plan Validity

Figure 10 reports the plan validity rate per model, the upstream quality gate for Method 1.

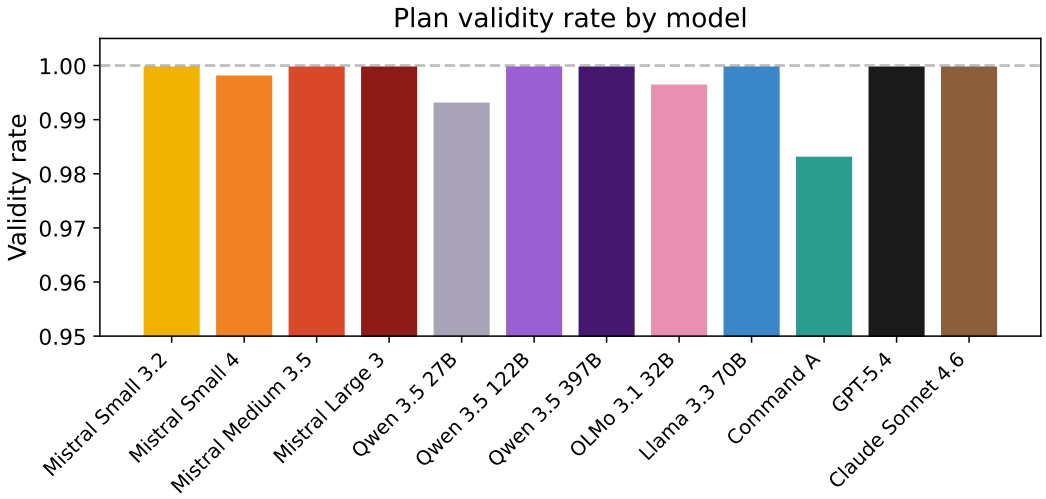


Figure 10: Plan validity rate by model: fraction of trials whose `<plan>` block parses to valid taxonomy categories.

E Modal-Set Agreement

Figure 11 complements the pairwise Jaccard analysis with modal-set agreement, the fraction of trials whose declared strategy set equals the run's most common set (Section 5.2).

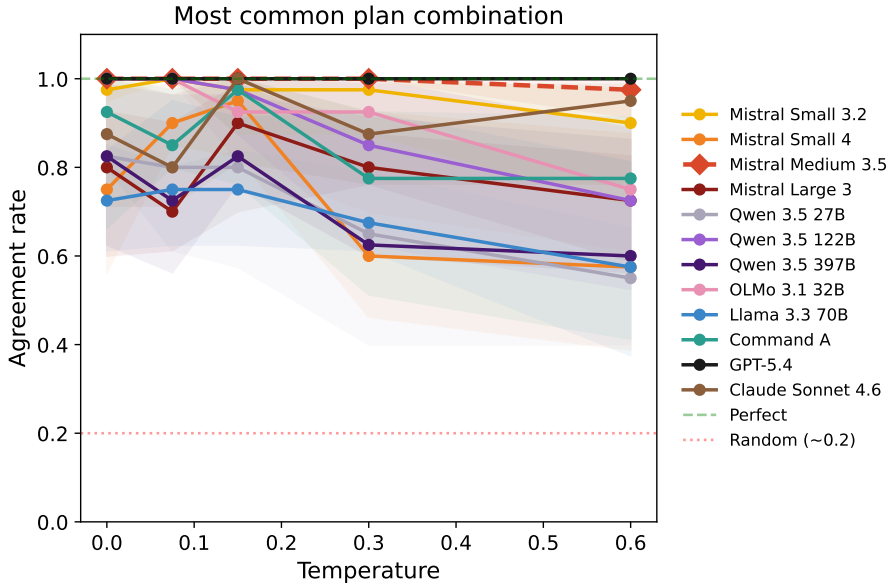


Figure 11: Modal-set agreement by model and temperature: fraction of trials whose declared strategy set equals the run's modal set.

F Per-Vignette Stability

Figure 12 breaks decision consistency down to individual model–vignette cells, one heatmap per temperature, for consultation of specific combinations.

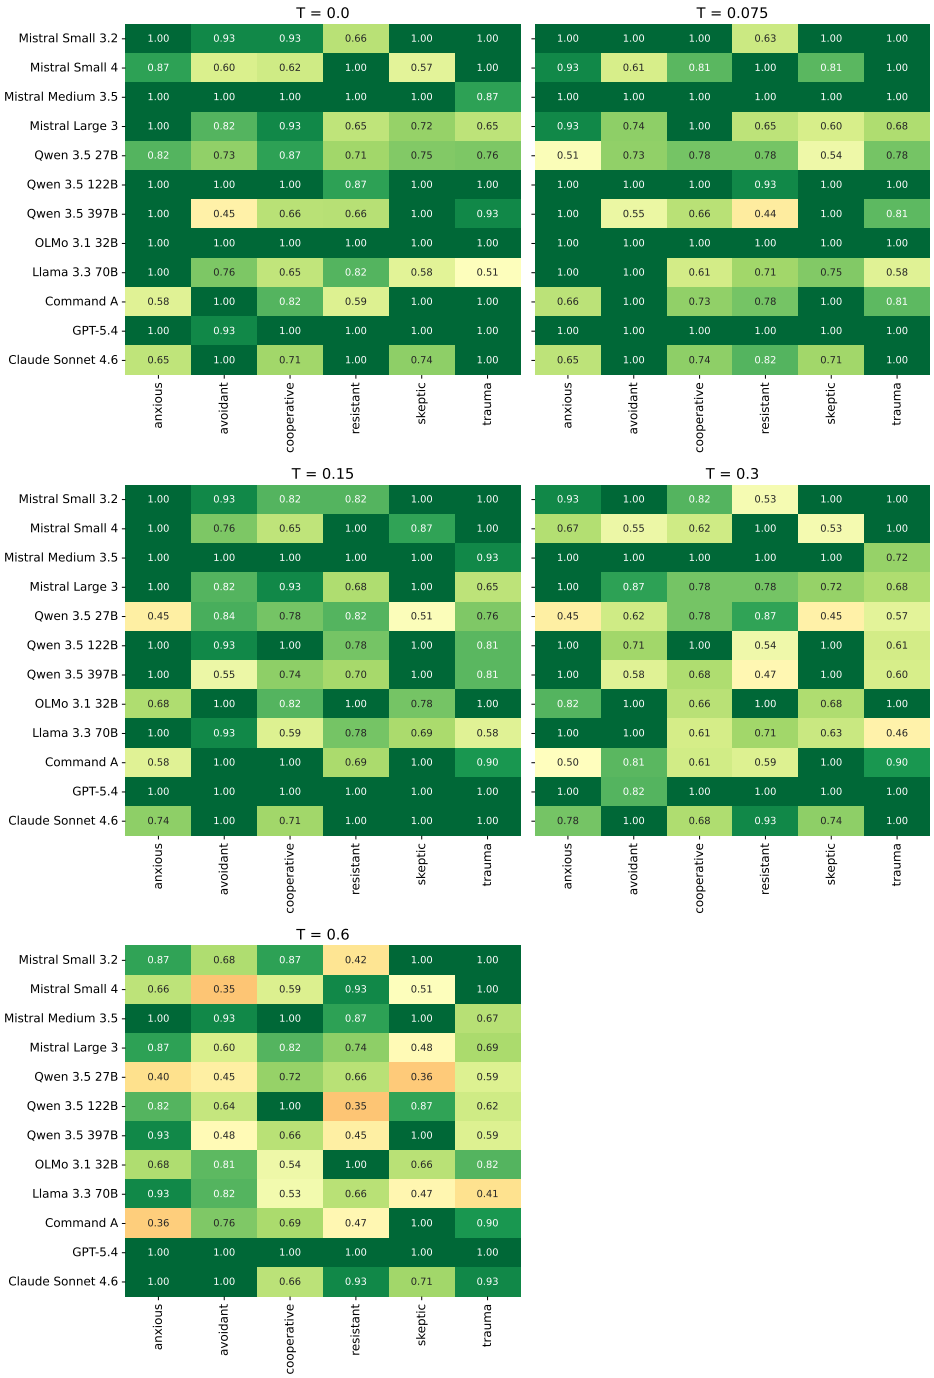


Figure 12: Median Jaccard per model × vignette, one heatmap per temperature. Individual model–vignette combinations can deviate noticeably from the aggregate even though the overall vignette effect is not significant (Section 5.4).

G Seed Control Experiment

A supplementary experiment on Mistral Large 3 compares runs with a fixed seed (`seed=42`) against unseeded runs under otherwise identical conditions. Fixing the seed does not improve consistency (Figure 13): vendor seed support is best effort at most, and residual serving-side nondeterminism persists (Yuan et al., 2025). The main experiment therefore sets no seed and captures stochastic variance through trial repetition instead.

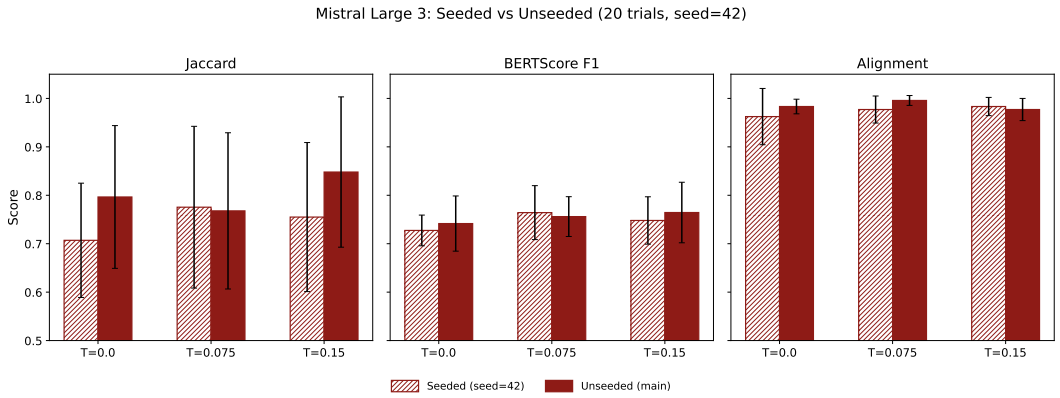


Figure 13: Seeded (`seed=42`) versus unseeded runs for Mistral Large 3. A fixed seed does not improve run-to-run consistency.

H Models and Configurations Outside the Sweep

The protocol needs two controls on the serving side: a temperature that reaches the model and a reasoning mode that can be switched off. Newer frontier models increasingly offer neither. Table 3 records the cases met during this study, each re-probed on 2026-11-10 with single requests.

Model	Route	Request	Result
GPT-5.4	OpenRouter	T=0.6, effort `none`	200, temperature dropped
GPT-5.4	OpenRouter, strict	T=0.6, effort `none`	404, no endpoint
GPT-5.4	OpenRouter	T=0.6, effort `high`	200, temperature dropped
GPT-5.4	OpenAI	T=0.6, effort `none`	200
GPT-5.4	OpenAI	T=0.6, effort `high`	400, default temperature only
GPT-6.1 Terra	OpenRouter	T=0.6, effort `none`	200, temperature dropped
GPT-6.1 Terra	OpenRouter, strict	T=0.6, effort `none`	404, no endpoint
GPT-6.1 Terra	OpenAI	T=0.6, effort `none`	200
Claude Sonnet 4.6	OpenRouter, strict	T=0.6	200
Opus 4.7 to Sonnet 5.5	OpenRouter	T=0.6	200, temperature dropped
Opus 4.7 to Sonnet 5.5	OpenRouter, strict	T=0.6	404, no endpoint
Claude Sonnet 5.5	OpenRouter	T=0.6, effort `none`	400, reasoning mandatory
Mistral Large 4	Mistral	effort `none`	400, unsupported value
Mistral Large 4	OpenRouter	effort `none`	400, unsupported value
Mistral Large 4	Mistral	effort `low`	200, reasoning tokens returned

Table 3: Parameter probes of 2026-11-10. "Strict" adds `require_parameters`, under which OpenRouter refuses a request instead of dropping a parameter the endpoint does not support.

The gateway behaviour that invalidated the first GPT-5.4 collection is unchanged. OpenRouter still answers a GPT-5.4 request that carries a temperature, and it also answers when the temperature is combined with high reasoning effort, a combination the OpenAI API itself rejects. The parameter is therefore removed before the request reaches the model. The native API accepts temperature at reasoning effort `none`, for GPT-5.4 and for the newer GPT-6.1 Terra alike, so later OpenAI models remain sweepable by the direct route. They are absent from this study because the proprietary pair was fixed in March 2026 (Section 4.1).

Anthropic models after Sonnet 4.6 are excluded for a different reason. Their API returns an error when a temperature is set (Anthropic, 2026), and the two 5.5 models can no longer switch reasoning off completely, so neither control is available. Through OpenRouter, the six Opus and Sonnet models released since then (Opus 4.7, 4.8, 5 and 5.5, Sonnet 5 and 5.5) all show the GPT pattern: the request with a temperature succeeds and the strict request fails. Sonnet 4.6 passes both.

Mistral Large 4 is the one case that was collected before the control disappeared. The public preview accepted reasoning effort `none`. The released model accepts only `low`, `medium` and `high` (Mistral AI, 2026), rejects `none` on both routes, and reasons at `low`. Its preview results are therefore kept out of the model set and reported in Appendix I.

I Mistral Large 4 Preview

Mistral Large 4 (1.05T MoE with 52B active parameters) was released as a public preview on 2026-10-06. It was collected on 2026-10-22, seven months after the main set, on the identical frozen histories and with a single registry entry plus one line that pins the base endpoint and excludes the zero-data-retention and EU variants. All 600 trials ran at reasoning effort `none` under the pinned

regime, with the provider logged per trial and completion-token counts that match the visible output. The collection took 1 h 20 min including re-runs after upstream rate limits. The weights followed on 2026-10-29 under the Mistral Ecosystem Open-Weight License, and the released model no longer accepts `none` (Appendix H). The measured configuration can no longer be requested, so Large 4 is not part of the model set and enters none of the statistics in Section 5. Table 4 reports what the preview showed.

Metric	T=0.0	T=0.075	T=0.15	T=0.3	T=0.6
Median Jaccard	1.000	1.000	1.000	1.000	0.854
Mean Jaccard	0.956	0.930	0.931	0.889	0.818
Modal-set agreement	0.958	0.908	0.917	0.867	0.808
Mean BERTScore F1	0.794	0.771	0.751	0.720	0.691
Mean alignment	0.954	0.952	0.971	0.969	0.969

Table 4: Mistral Large 4 preview by temperature (six vignettes per cell, 20 trials each).

Plan validity is 100% and no trial failed with a judge error. Pooled median Jaccard is 1.000, modal-set agreement is 0.892, one strategy set covers all 20 trials in 19 of 30 conditions, mean BERTScore is 0.746, and mean alignment is 0.963. Large 4 shows no low-temperature optimum: mean Jaccard is highest at T=0.0 and falls to 0.818 at T=0.6, a trend that is not significant ($\rho = -0.31$, $p = .095$). The ceiling median comes with a narrower repertoire than any model in the set (77% of 1,200 picks in the top two categories against 73% for OLMo 3.1 32B, and no confrontation at all), so part of it is distributional (Section 5.1). The remaining instability sits mostly in one vignette (avoidant, median 0.653).

Set next to the model set, Large 4 would share the median ceiling of 1.000 but trail Mistral Medium 3.5 on modal-set agreement (0.892 against 0.972) and response similarity (0.746 against 0.816). The comparison is cross-regime, seven months of serving changes lie in between, and the open-weight release may not behave like the measured checkpoint. It gives no reason to revise the recommendation for Medium 3.5 (Section 6.2).

J Per-Condition Results

Model	T=0.0	T=0.075	T=0.15	T=0.3	T=0.6
Mistral Small 3.2	0.967	1.000	0.967	0.967	0.872
Mistral Small 4	0.746	0.874	0.935	0.646	0.625
Mistral Medium 3.5	1.000	1.000	1.000	1.000	0.967
Mistral Large 3	0.772	0.709	0.877	0.775	0.712
Qwen 3.5 27B	0.760	0.754	0.768	0.595	0.518
Qwen 3.5 122B	1.000	1.000	0.967	0.853	0.730
Qwen 3.5 397B	0.799	0.737	0.775	0.642	0.626
OLMo 3.1 32B	1.000	1.000	0.911	0.911	0.746
Llama 3.3 70B	0.705	0.730	0.732	0.668	0.597
Command A	0.911	0.793	0.950	0.714	0.724
GPT-5.4	1.000	1.000	1.000	1.000	1.000
Claude Sonnet 4.6	0.868	0.779	1.000	0.854	0.933

Table 5: Median pairwise Jaccard per model and temperature (across 6 vignettes).

Model	T=0.0	T=0.075	T=0.15	T=0.3	T=0.6
Mistral Small 3.2	0.757	0.766	0.758	0.743	0.708
Mistral Small 4	0.692	0.725	0.726	0.684	0.657
Mistral Medium 3.5	0.830	0.886	0.824	0.785	0.754
Mistral Large 3	0.742	0.756	0.764	0.743	0.705
Qwen 3.5 27B	0.831	0.780	0.754	0.715	0.687
Qwen 3.5 122B	0.882	0.840	0.789	0.743	0.710
Qwen 3.5 397B	0.750	0.759	0.735	0.726	0.717
OLMo 3.1 32B	0.941	0.813	0.760	0.730	0.699
Llama 3.3 70B	0.746	0.749	0.740	0.731	0.702
Command A	0.771	0.762	0.754	0.700	0.690
GPT-5.4	0.770	0.762	0.760	0.751	0.745
Claude Sonnet 4.6	0.844	0.801	0.799	0.771	0.743

Table 6: Mean pairwise BERTScore F1 per model and temperature (across 6 vignettes).

Model	T=0.0	T=0.075	T=0.15	T=0.3	T=0.6
Mistral Small 3.2	0.908	0.925	0.908	0.921	0.921
Mistral Small 4	0.837	0.842	0.790	0.806	0.776
Mistral Medium 3.5	0.965	0.944	0.960	0.963	0.975
Mistral Large 3	0.983	0.996	0.977	0.967	0.973
Qwen 3.5 27B	0.965	0.954	0.923	0.927	0.960
Qwen 3.5 122B	0.983	0.973	0.979	0.983	0.969
Qwen 3.5 397B	0.994	0.977	0.994	0.996	0.994
OLMo 3.1 32B	0.898	0.917	0.910	0.915	0.894
Llama 3.3 70B	0.919	0.890	0.888	0.875	0.875
Command A	0.915	0.911	0.910	0.895	0.887
GPT-5.4	1.000	1.000	0.998	1.000	1.000
Claude Sonnet 4.6	1.000	1.000	1.000	1.000	0.998

Table 7: Mean plan–response alignment per model and temperature (across 6 vignettes).