

**Test Case 1:** “..that verifies that requests to valid URLs return a 200 HTTP status code”

Initial request status and form:

```
status: 200
```




Upon accessing “test”:

```
2 status: 200
```


**Test Case 2:** “..that verifies that requests to valid URLs return a body that contains the HTML generated from the relevant index.md markdown file”

Creation of test document:


```
content > test
```

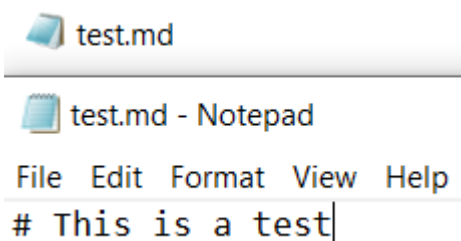

What is shown on the front-end:

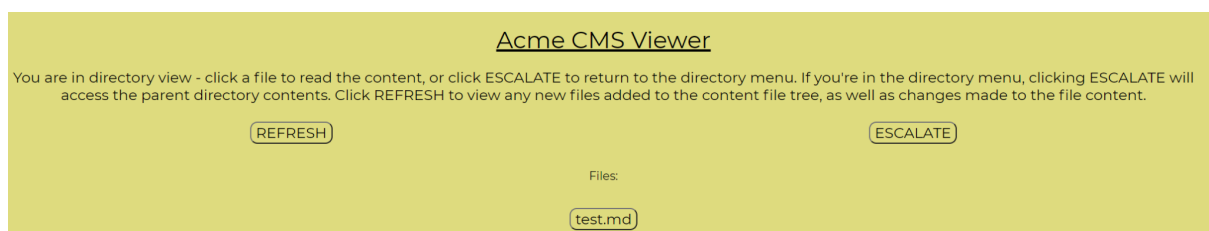


Upon accessing “test.md”:

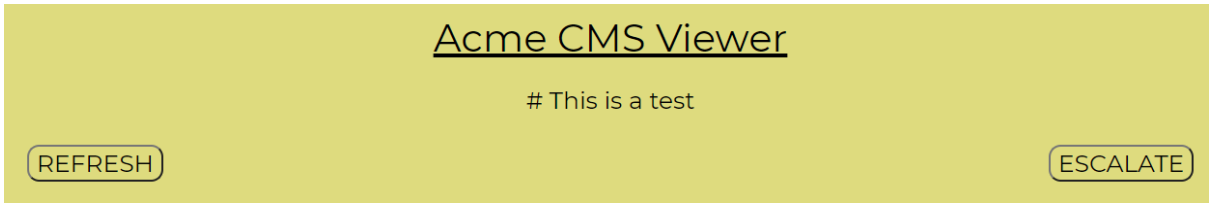


**Test Case 3:** “..that verifies that requests to URLs that do not match content folders return a 404 HTTP status code”


Escalating to parent of “test.md”:

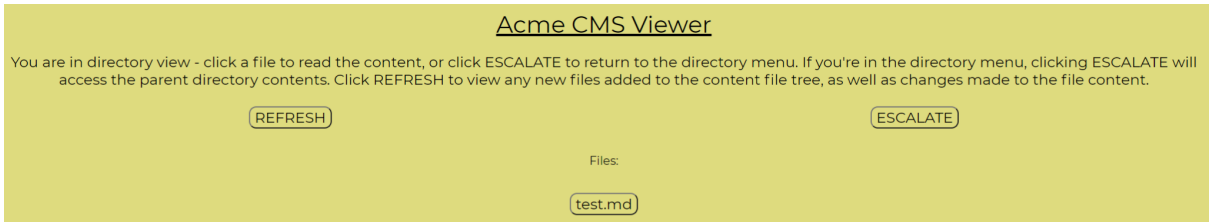

Deleting “test.md”:

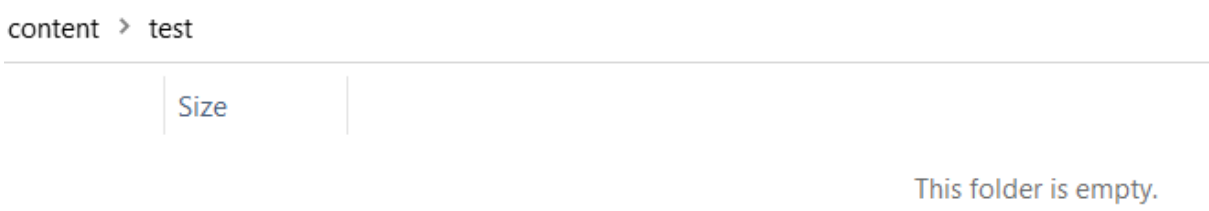

Without refreshing, the entry still exists on the front-end:

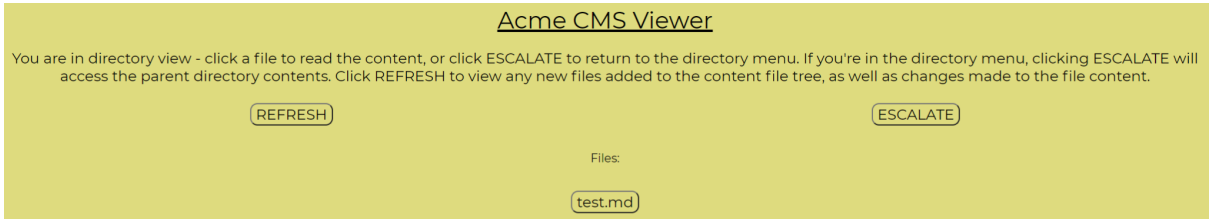

Clicking on “test.md” post deletion:

