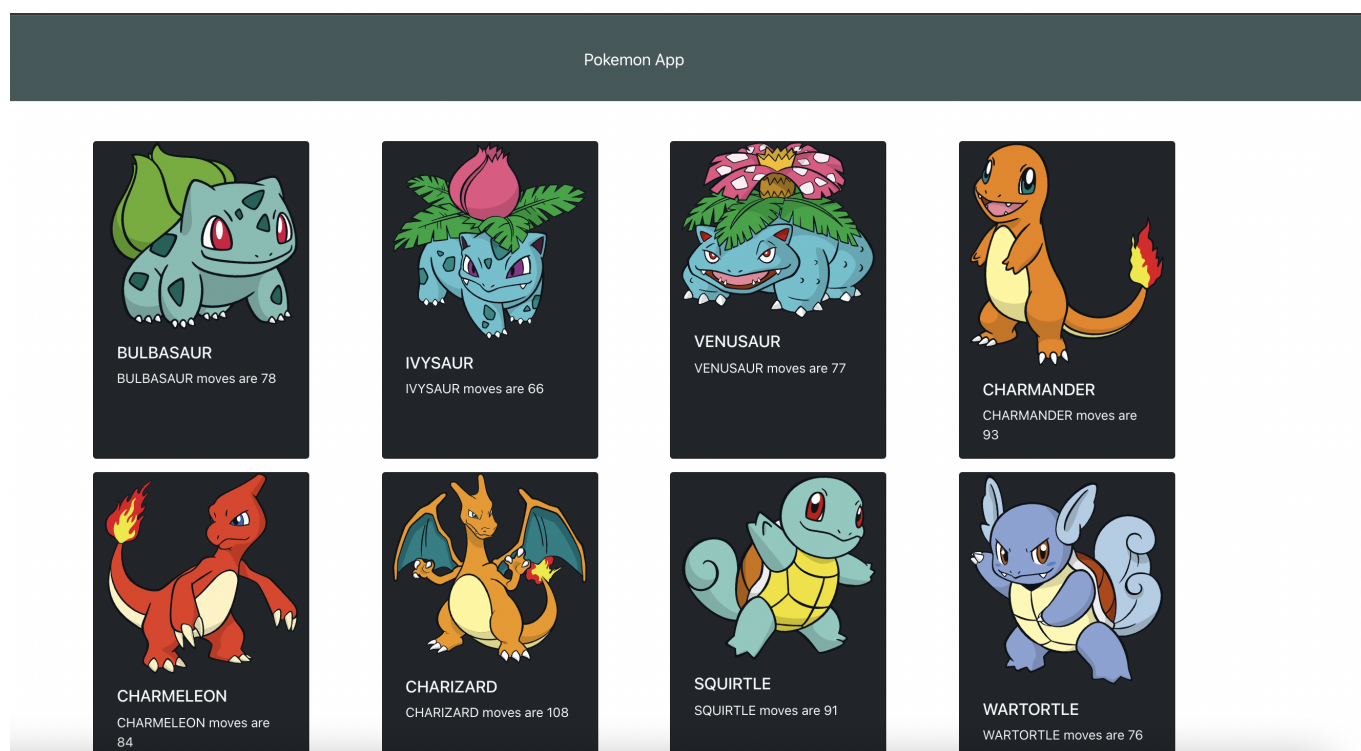# POKEMAN APP

Technologies

build with

- axios: ^0.24.0
- cors: ^2.8
- react: ^17.0
- react-bootstrap: ^2.1

API used

Pokeapi

Screenshot

Setup

To build this app from scratch you need to have node and npm installed in your machine and then run following commands

```
$ npx create-react-app <project name>
$ cd project directory
$ npm init
$ npm install react-bootstrap
$ npm install axios
$ npm install
```

index html

include in index.html link for bootstrap

```
<link
  rel="stylesheet"

href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.
css"
  integrity="sha384–
1BmE4kWBq78iYhFldvKuhfTAU6auU8tT94WrHftjDbrCEXSU1oBoqyl2QvZ6jIW3"
  crossorigin="anonymous"/>
```

App js

- import your BootStrap components
- use useState hook for changing pokemon data.
- use useEffect hook for fetching api data from pokeapi.