

S.M. Rezaun Ferdous Rifat


19301118

Sec - 8

0

10.1.2018

(d)

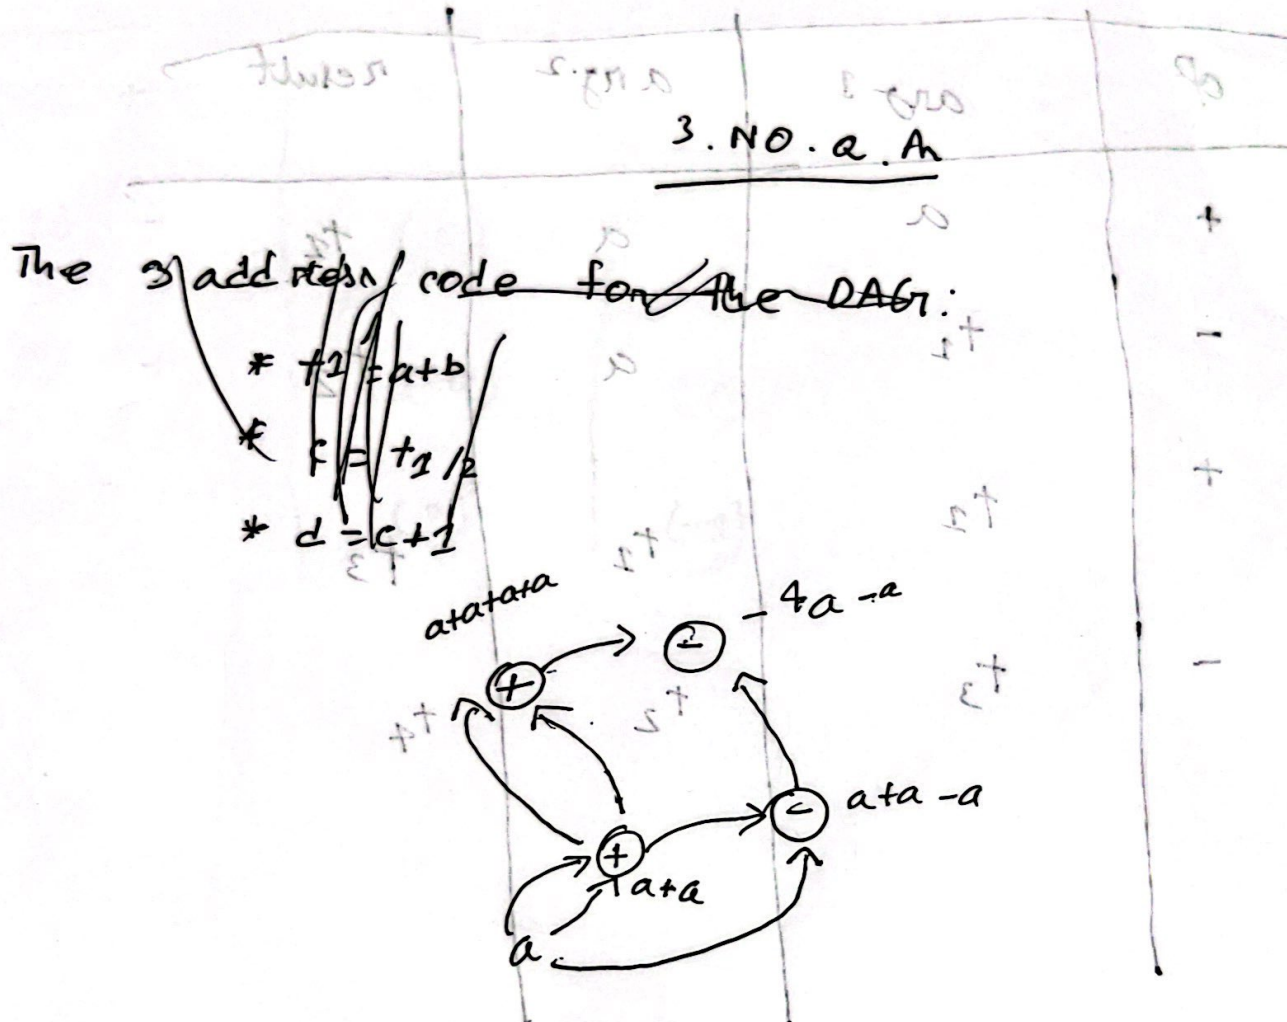

a) The 3 address code :

$$t_1 = a + a$$


$$t_2 = t_1 - a$$

$$t_3 = t_1 + t_2$$

$$t_4 = t_3 - t_2$$

b) quadruples:

op	arg 1	arg 2	result
+	a	a	t_2
-	t_1	a	t_2
+	t_1	t_1	t_3
-	t_3	t_2	t_4

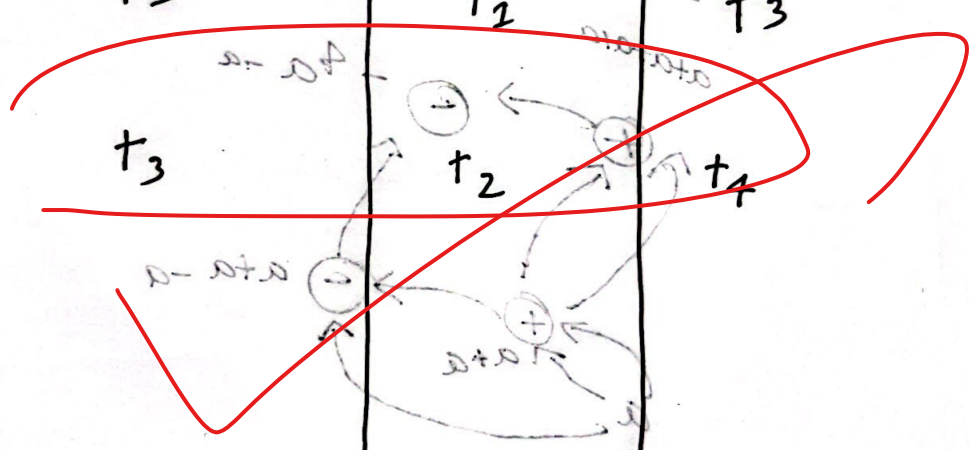

a) The 3 basic code :


$$\begin{aligned}
 t_1 &= a + a \\
 t_2 &= t_1 - a \\
 t_3 &= t_1 + t_2 \\
 t_4 &= t_3 - t_2
 \end{aligned}$$

triples:

MA. 2.015


op	arg1	arg2
(0) +	a	a
(1) -	(0)	a
(2) +	(0)	(0)
(3) -	(2)	(-1)

0.0 = x tolt
0.0 = v tolt
int [x] [y] twi

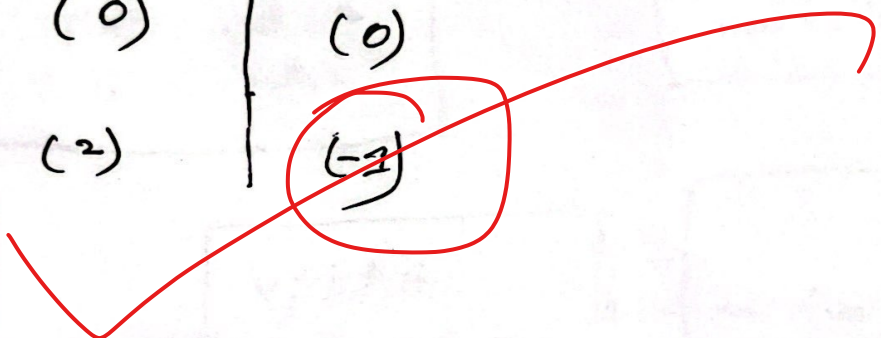

2. NO. Q. An

By using ^{int} of hashtable



arg count : int, 2
arg values : char, 2
t : float, 2
n : int, 2
i : int, 2

x : float, 2
v : float, 1
m : array type, 1
~~main : (int, char) void, 1~~

s : float, 3
e : int, 3
i : int, 3

v : int, 4
count : int, 4
n : float, 4

m : float, 5




1 NO. Q. Ans


~~record of heat~~

```
record { float [2][3] a; int b; } P;
```


~~0000~~ offset 004844

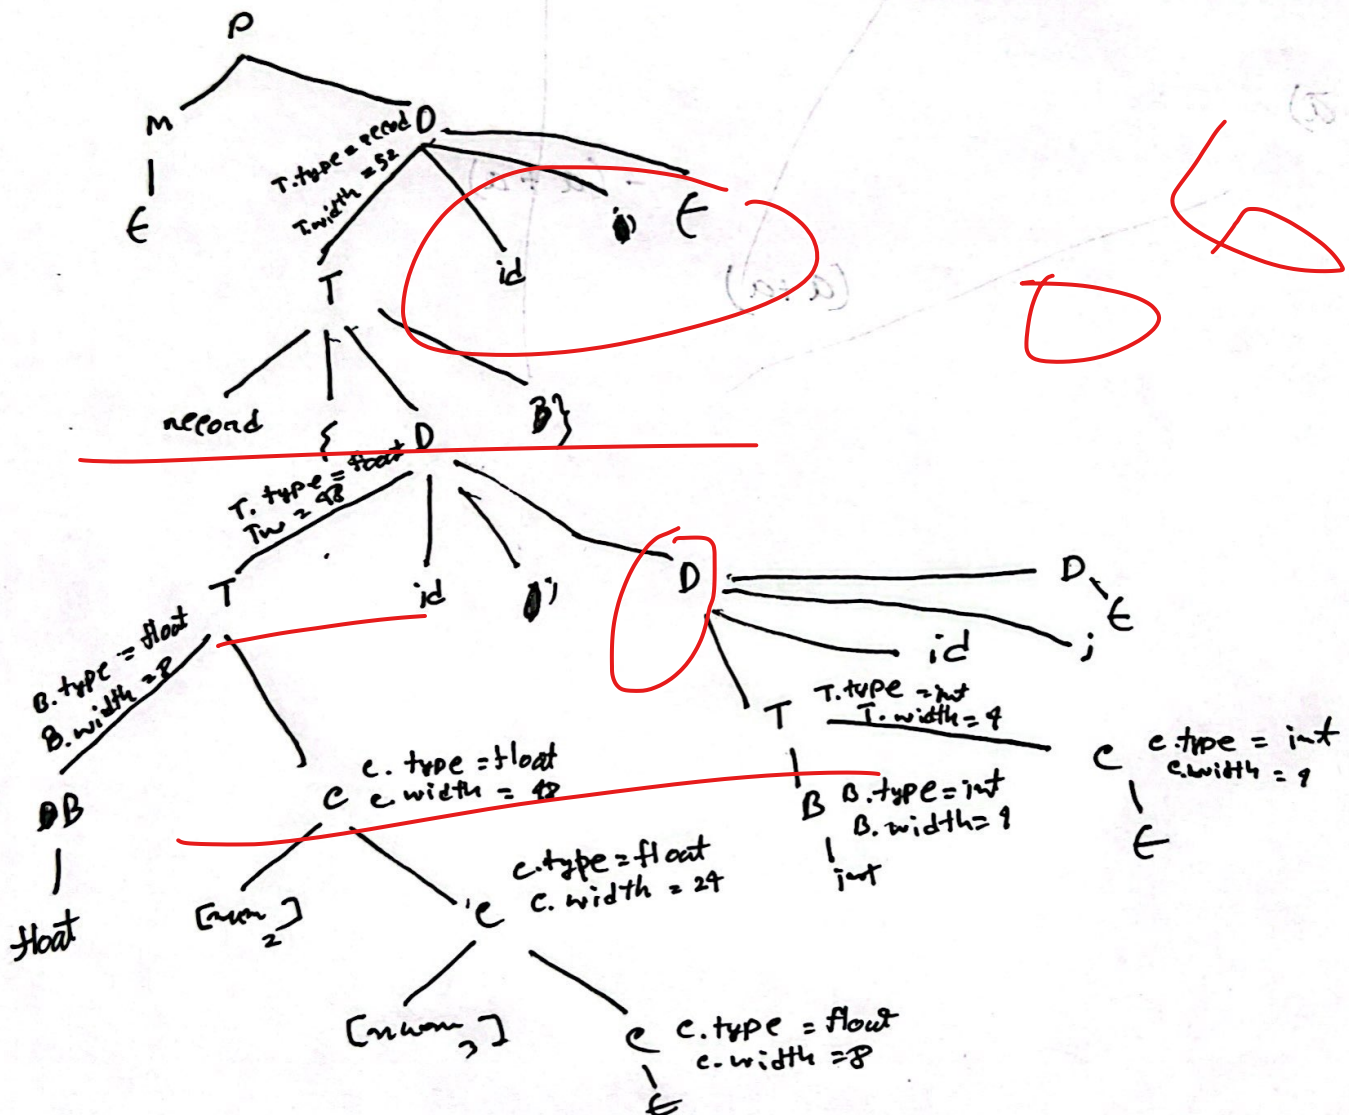

name	type	offset
a	arr (2 ^{dim} array (1; float)	0
b	int	48



Stack



End

