
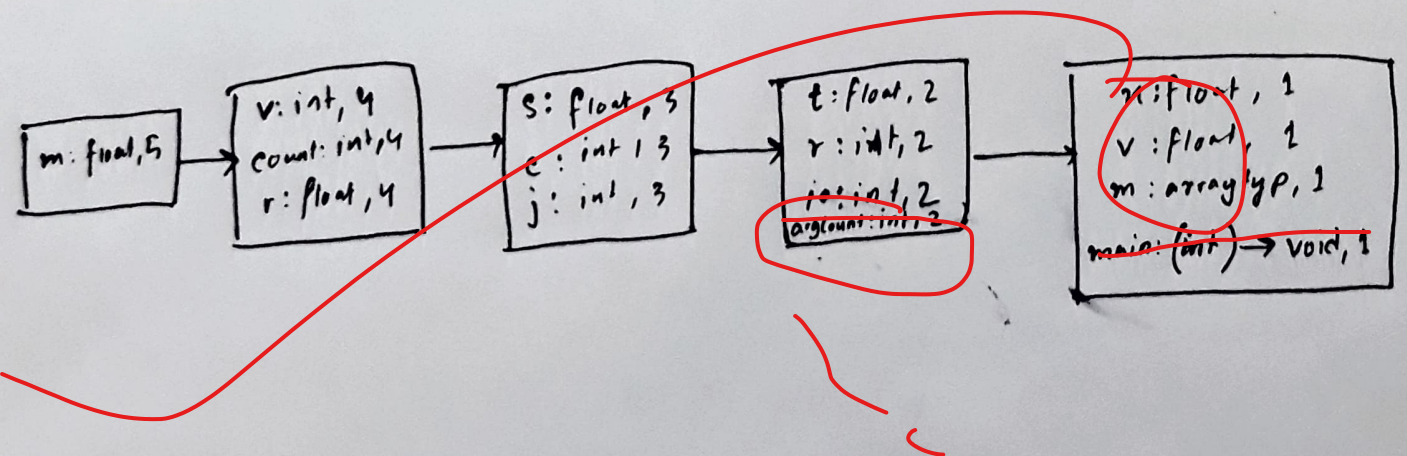



```


(2)
1 float x = 0.0;
  float v = 0.0;
  int [10][20] m;
  void main (int argc, char* [] argv values) {
2     x = toFloat (argv[1]);
    m = readMatrix... (argv[2]);
    float t = 1.0;
    int r = 10;
    for (int i = 0; ... ) {
3        float s = 0.0;
        int c = 20;
        for (int j = 0; ... ) {
4            int v = m[i][j];
            int count = 0;
            float r = 1.0;
            while (count < r) {
5                count += 1;
                float m = sqrt(x);
                ...
            }
        }
    }
}

```

07

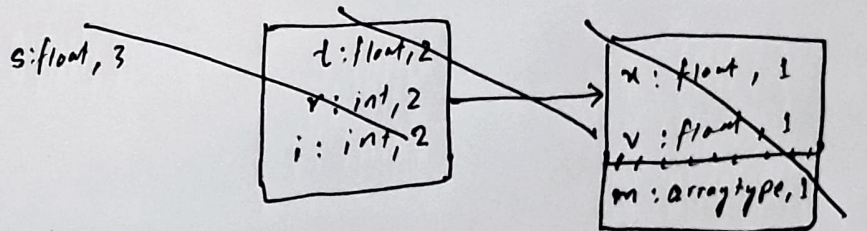

$$\textcircled{3} \quad a \quad ((a+a) + (a+a)) - ((a+a) - a)$$

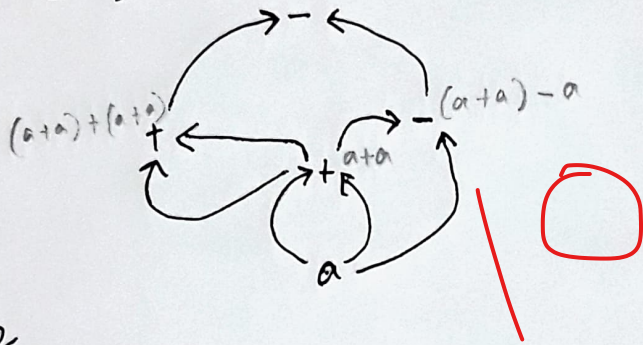

Three address code:

$$0 \quad t_1 = a + a$$

$$1 \quad t_2 = t_1 - a$$

$$2 \quad t_3 = t_1 + t_1$$

$$3 \quad t_4 = t_3 - t_2$$

b

Quadruple

	op	arg 1	arg 2	result
0	+	a	a	t_1
1	-	t_1	a	t_2
2	+	t_1	t_1	t_3
3	-	t_3	t_2	t_4

Triple

	op	arg 1	arg 2
0	+	a	a
1	-	(0)	a
2	+	(0)	(0)
3	-	(2)	(1)