

Name: Shupia Akter Ethuma.


ID: 20301055

Sec: 08

26

Ans: 1 to the Q: No: 3

$$(a + (a + a)) - ((a + a) - a)$$

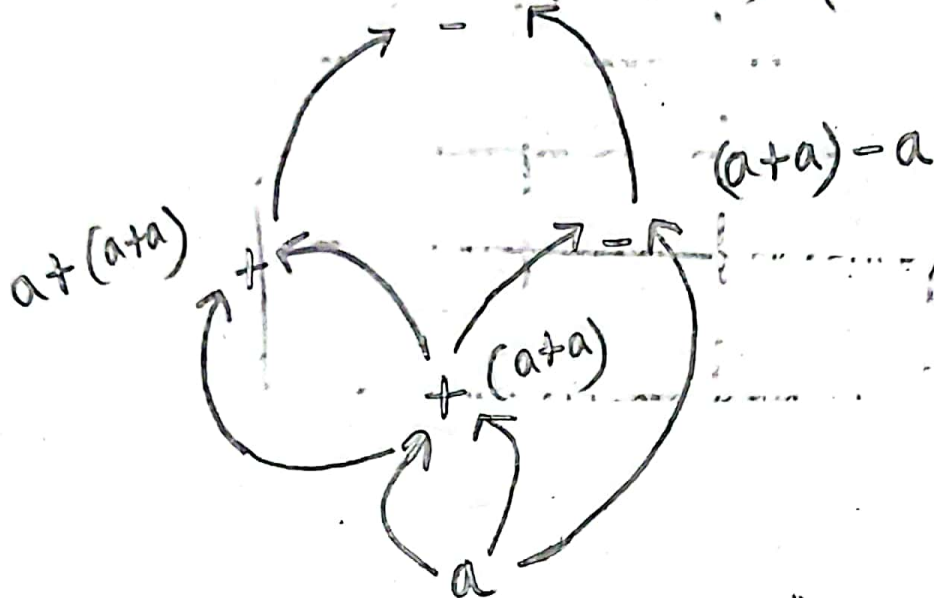

So, the input here  $\rightarrow$

$$(a + (a + a)) - ((a + a) - a)$$

$t_3$                        $t_1$

$$\begin{aligned} t_1 &= a + a \\ t_2 &= t_1 - a \\ t_3 &= t_1 + t_2 \\ t_4 &= a + t_3 \end{aligned}$$

$$\begin{aligned} 0 \quad t_1 &= a + a \\ 1 \quad t_2 &= t_1 - a \\ 2 \quad t_3 &= a + t_1 \\ 3 \quad t_4 &= t_3 - t_2 \end{aligned}$$

(Ans)

(b)

Quadruples:

| Step | OP | Arg1           | Arg2           | Result         |
|------|----|----------------|----------------|----------------|
| 0    | +  | a              | a              | t <sub>1</sub> |
| 1    | -  | t <sub>1</sub> | a              | t <sub>2</sub> |
| 2    | +  | a              | t <sub>1</sub> | t <sub>3</sub> |
| 3    | -  | t <sub>3</sub> | t <sub>2</sub> | t <sub>4</sub> |

Triples:

| Step | OP | Arg1 | Arg2 |
|------|----|------|------|
| 0    | +  | a    | a    |
| 1    | -  | (0)  | a    |
| 2    | +  | a    | (0)  |
| 3    | -  | (2)  | (1)  |


(An)

Ans: to the Q: No: 1

record { float [2][3] a; int b; } P;

Global variable  
c → Int  
w → 4

89

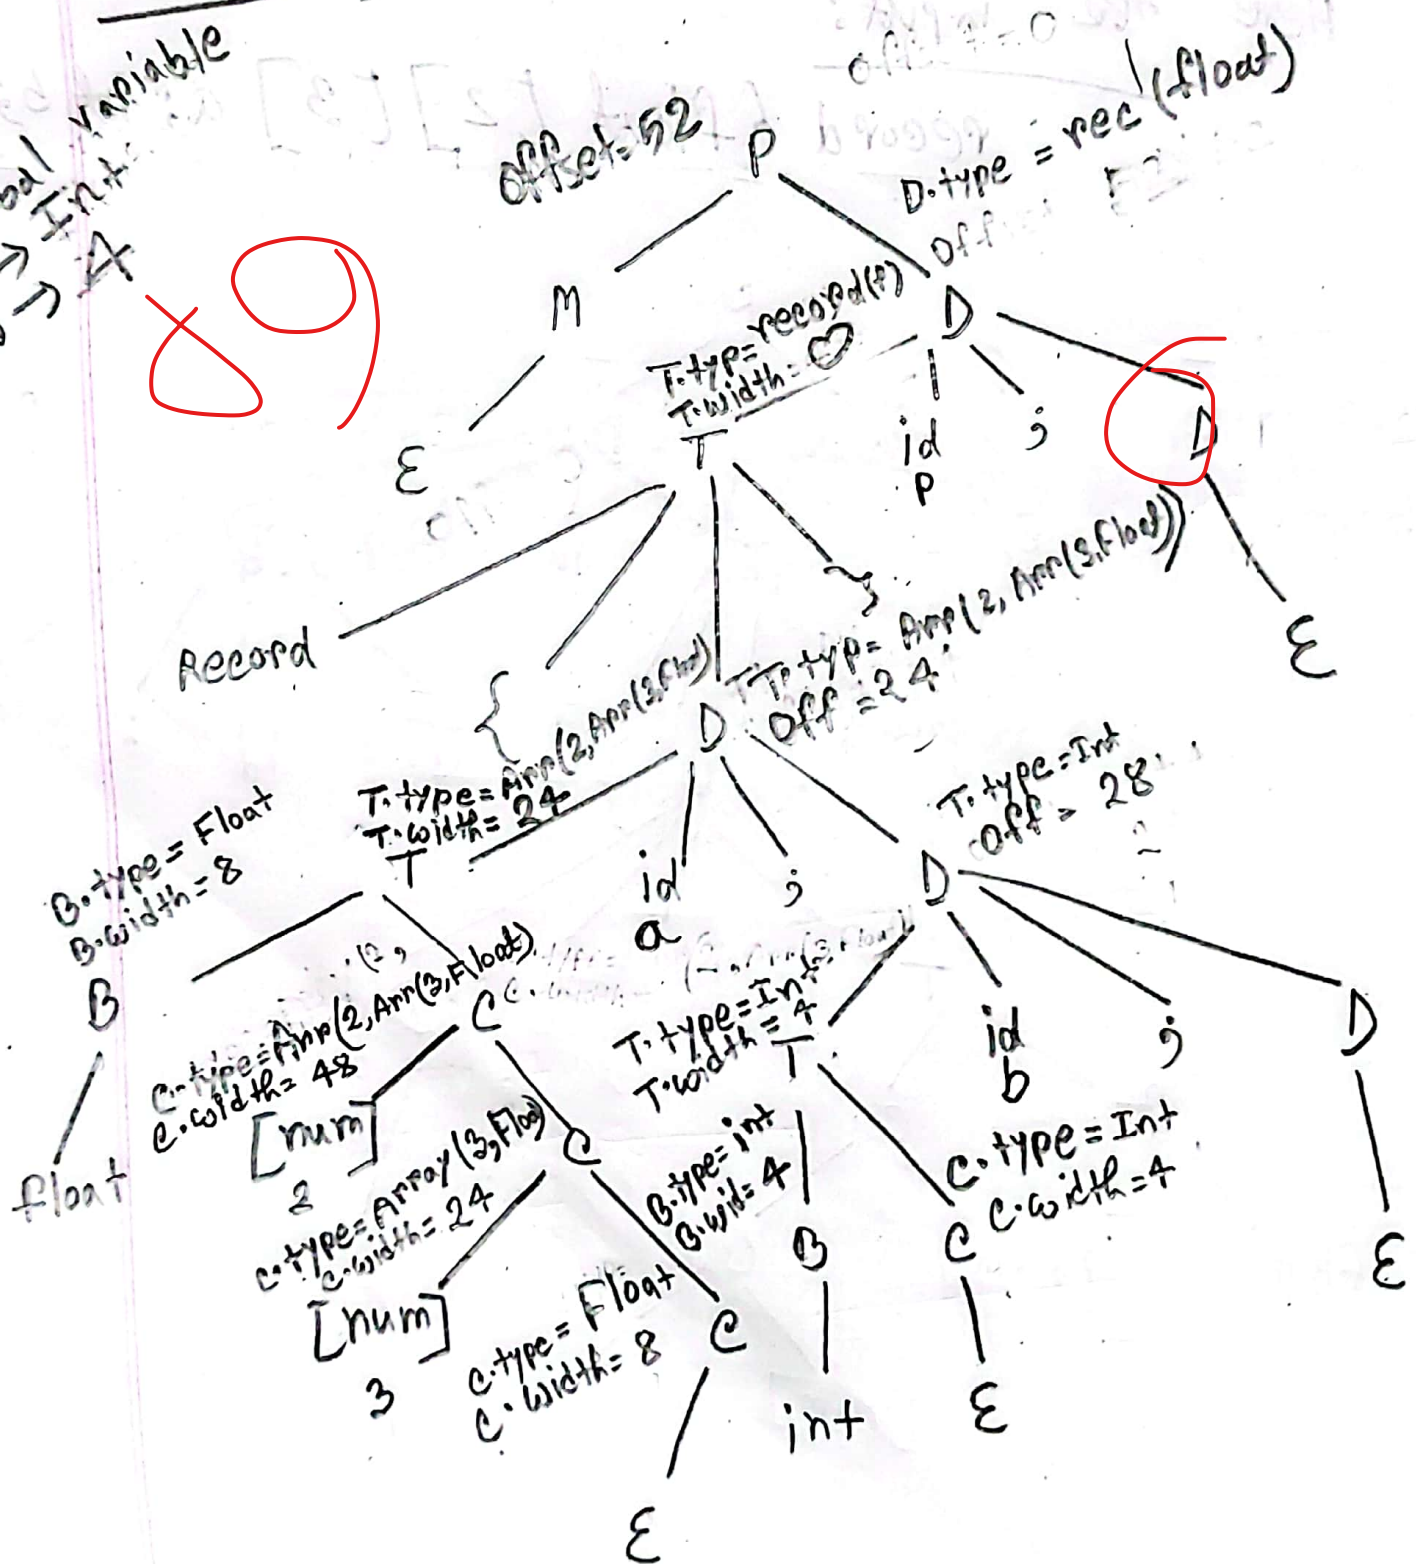


Ans: to the Q: No: 2

```
Float x = 0.0;
Float v = 0.0;
int [10][20] m;
void main (int argc, char* [ ] argValues) {
    x = toFloat (arg v[1]);
    m = readMatrixFromFile (arg v[2]);
    2 float t = 1.0;
    int r = 10;
    for (int i = 0; i < r; i += 1) {
        float s = 0.0;
        3 int c = 20;
        for (int j = 0; j < c; j += 1) {
            int v = m[i][j];
            4 int count = 0;
            float r = 1.0;
            while (count < v) {
                5 count += 1;
                float m = sqrt(x);
                r = r * m;
            }
            s = s + r;
        }
        printf("%f", s);
    }
}
```

```

    4 [ t = t * 3;
    }
    2 [ - print ln(t);
    ]
}

```

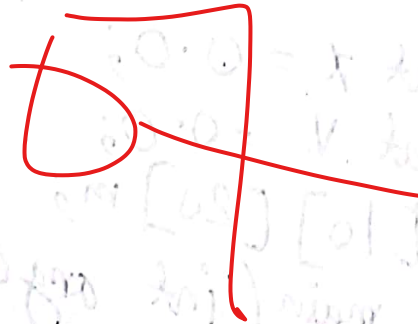

S: float, 3  
 C: int, 3  
 J: int, 3




X: Float, 1  
~~V: Array, 2~~  
 m:  
 t: Float, 2  
 p: Int, 2  
 I: Int, 2  
 v: Array, 2



X: Float, 1  
 V: Float, 1  
~~main: (int, char), 1~~



V: int, 4  
~~m: Array, 4~~  
 Count: Int, 4  
 p: float, 4



m: float, 5