


7.5

7.5

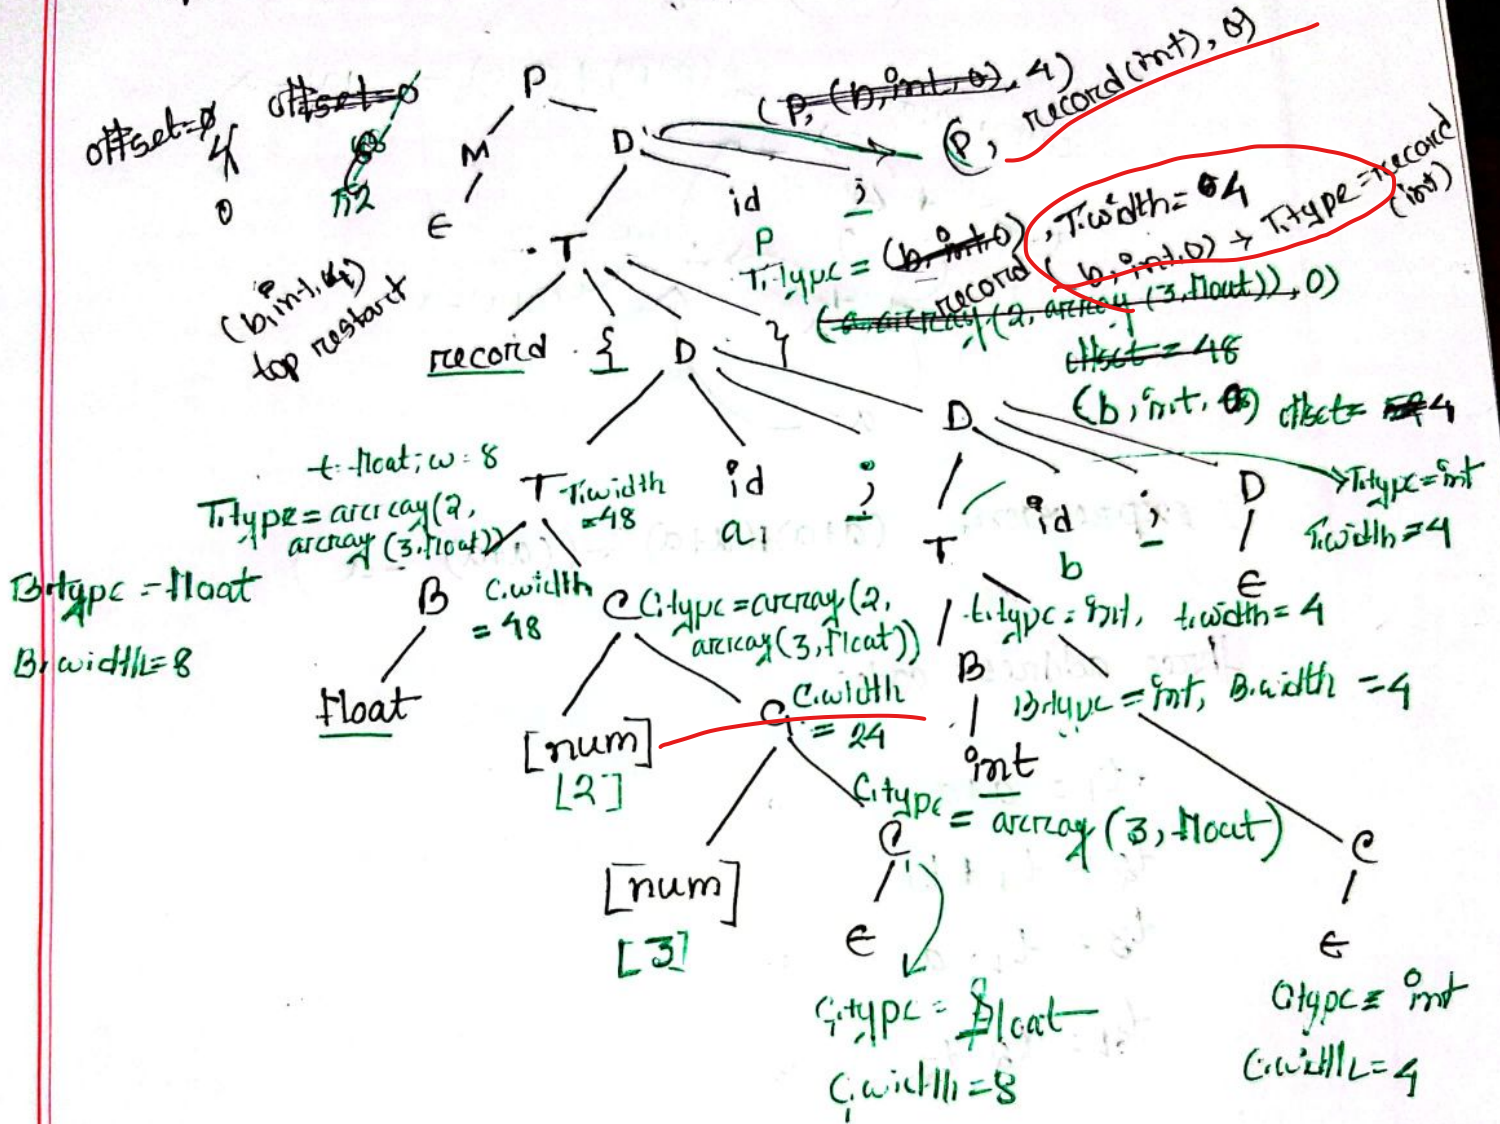

top	
a	array(a, array(3, float)), a)
b	int


env ltop

Stack

Answer to the Question NO-3

a)

expression: $(a+a) \rightarrow a$

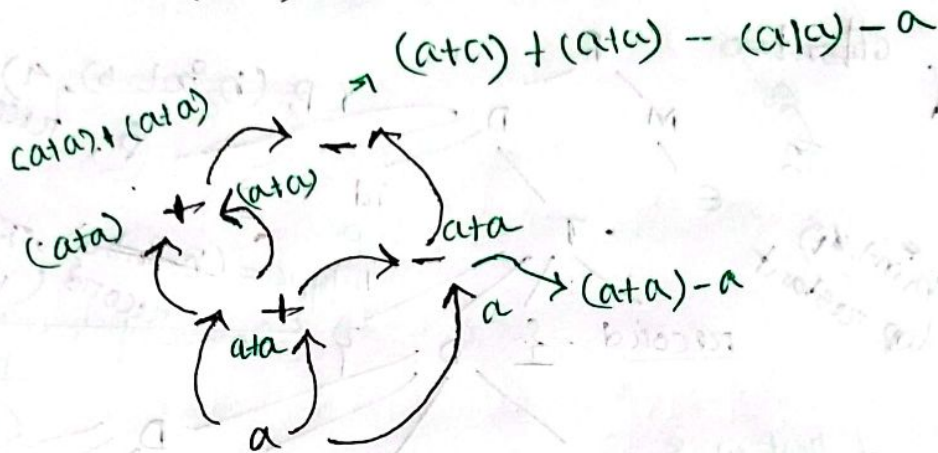

$\therefore$ expression: $(a+a) + (a+a) - ((a+a) - a)$

three address code:

$$t_1 = a + a \quad 0$$

$$t_2 = t_1 + t_1 \quad 1$$

$$t_3 = t_1 - a \quad 2$$

$$t_4 = t_2 - t_3 \quad 3$$

b) quadruples

op	arg ₁	arg ₂	result
+	a	a	t ₁
+	t ₁	t ₁	t ₂
+	t ₁	a	t ₃
-	t ₂	t ₃	t ₄

triples

	op	arg ₁	arg ₂	
(0)	+	a	a	t ₁
(1)	+	(0)	(0)	t ₂
(2)	-	(0)	a	t ₃
(3)	-	(1)	(2)	t ₄

Answer to the Question NO-2

```

1 float x = 0.0;
  float v = 0.0;
  int [10][20] m;
  void main (int argcCount, char*[] argvValues) {

```

```

    x = atof(argv[1]);
    m = readMatrixFromFile(argv[2]);
2   float t = 1.0;
    int n = 10;
    for (int i = 0; i <= n; i += 1) {

```

```

3   float s = 0.0;
    int e = 20;
    for (int j = 0; j <= e; j += 1) {

```

```

        int v = m[i][j];
        int count = 0;
        float r = 1.0;
        while (count < v) {

```

```

            count += 1;
5         float m = sqrt(x);
            r = r * m;
6

```

```

7     s = s + r;
8

```

```

3 | print(s);
  | t = t * s;
  | }
  | println(t);
  |

```

10

List of Hashtable

