


Ans. to the ques. no-03

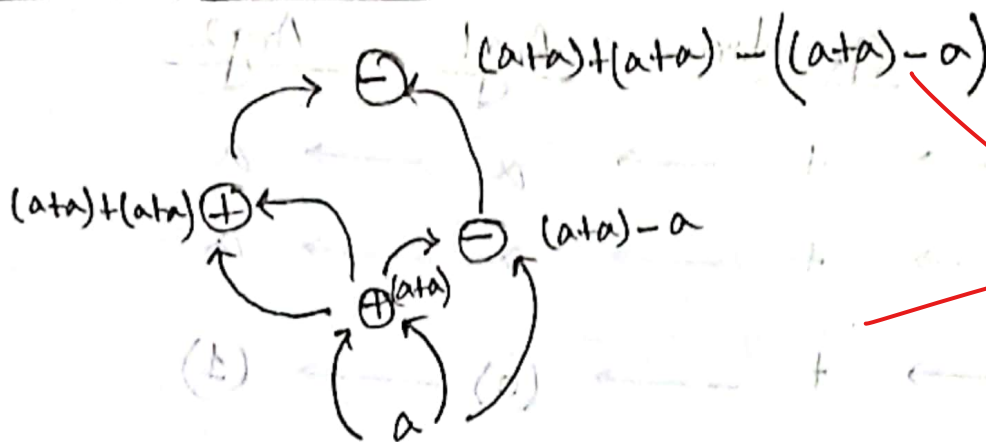

a)

3 address code:

- 0 $t_1 = a + a$
- 1 $t_2 = ~~t_1 + t_1~~ a + a$
- 2 $t_3 = t_1 + t_2$
- 3 $t_4 = a + a$
- 4 $t_5 = t_4 - a$
- 5 $t_6 = t_3 - t_5$

b) Quadruples:

step	Operators	Arg1	Arg2	Result
0 →	+	a	a	t ₁
1 →	+	a	t ₁	t ₂
2 →	+	t ₁	t ₂	t ₃
3 →	+	a	a	t ₄
4 →	-	t ₄	a	t ₅
5 →	-	t ₃	t ₅	t ₆

Triples:

<u>Step</u>		<u>Operation</u>	<u>Arg1</u>	<u>Arg2</u>
0	→	+	a	a
1	→	+	a	a
2	→	+	(0)	(1)
3	→	+	a	a
4	→	-	(3)	a
5	→	-	(2)	(4)

Ans. to the ques. no-02

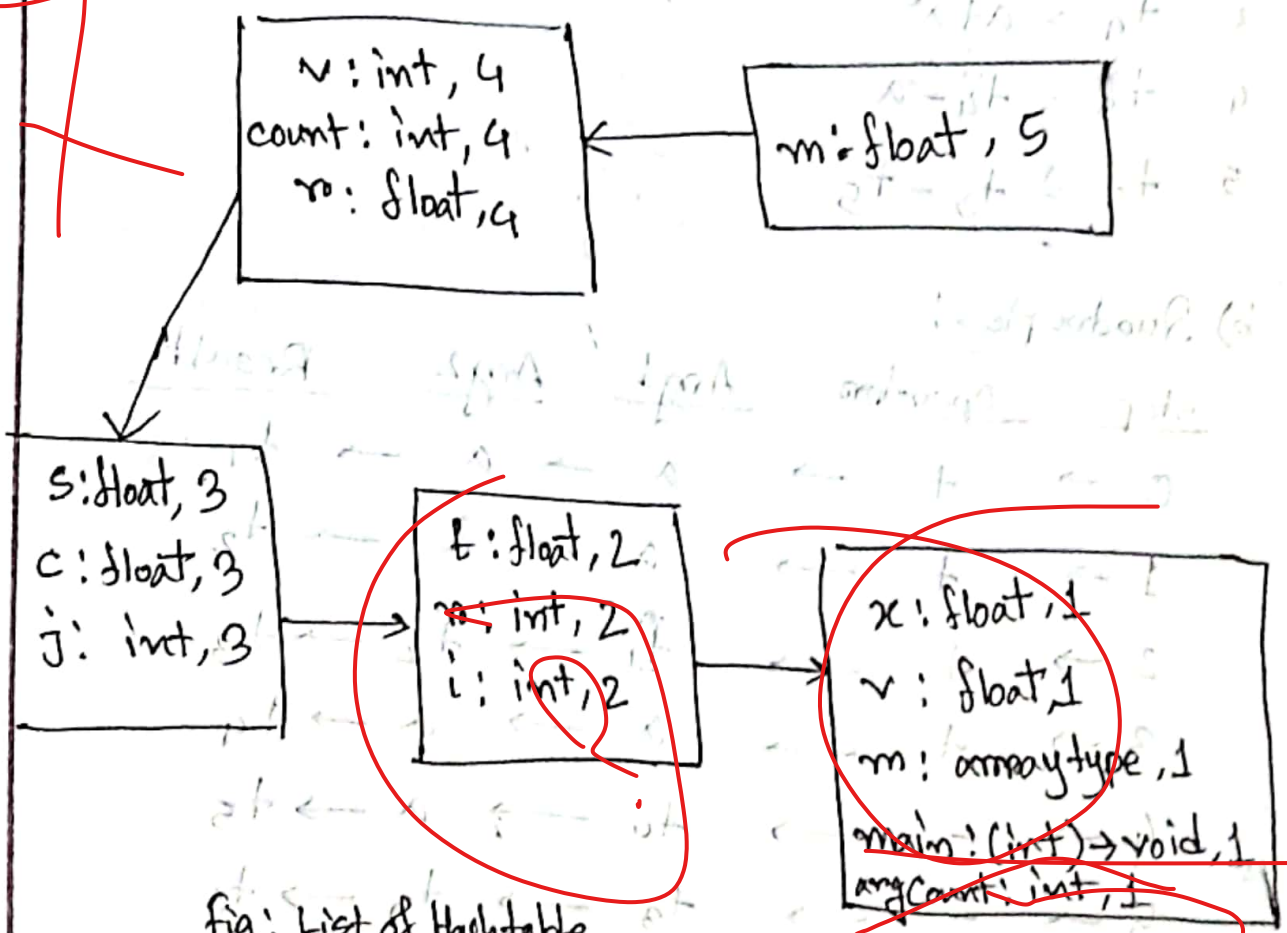


fig: List of Hashtable

