

FINAL


NAME% ROHINOOR


ID% 21101147

SEC% 07


CSE420

SULTANA ELORA

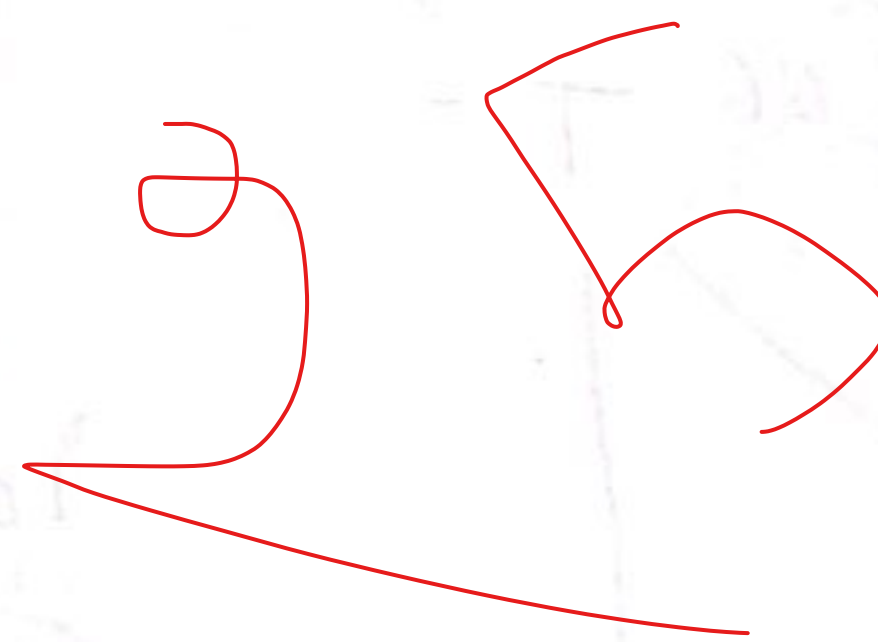

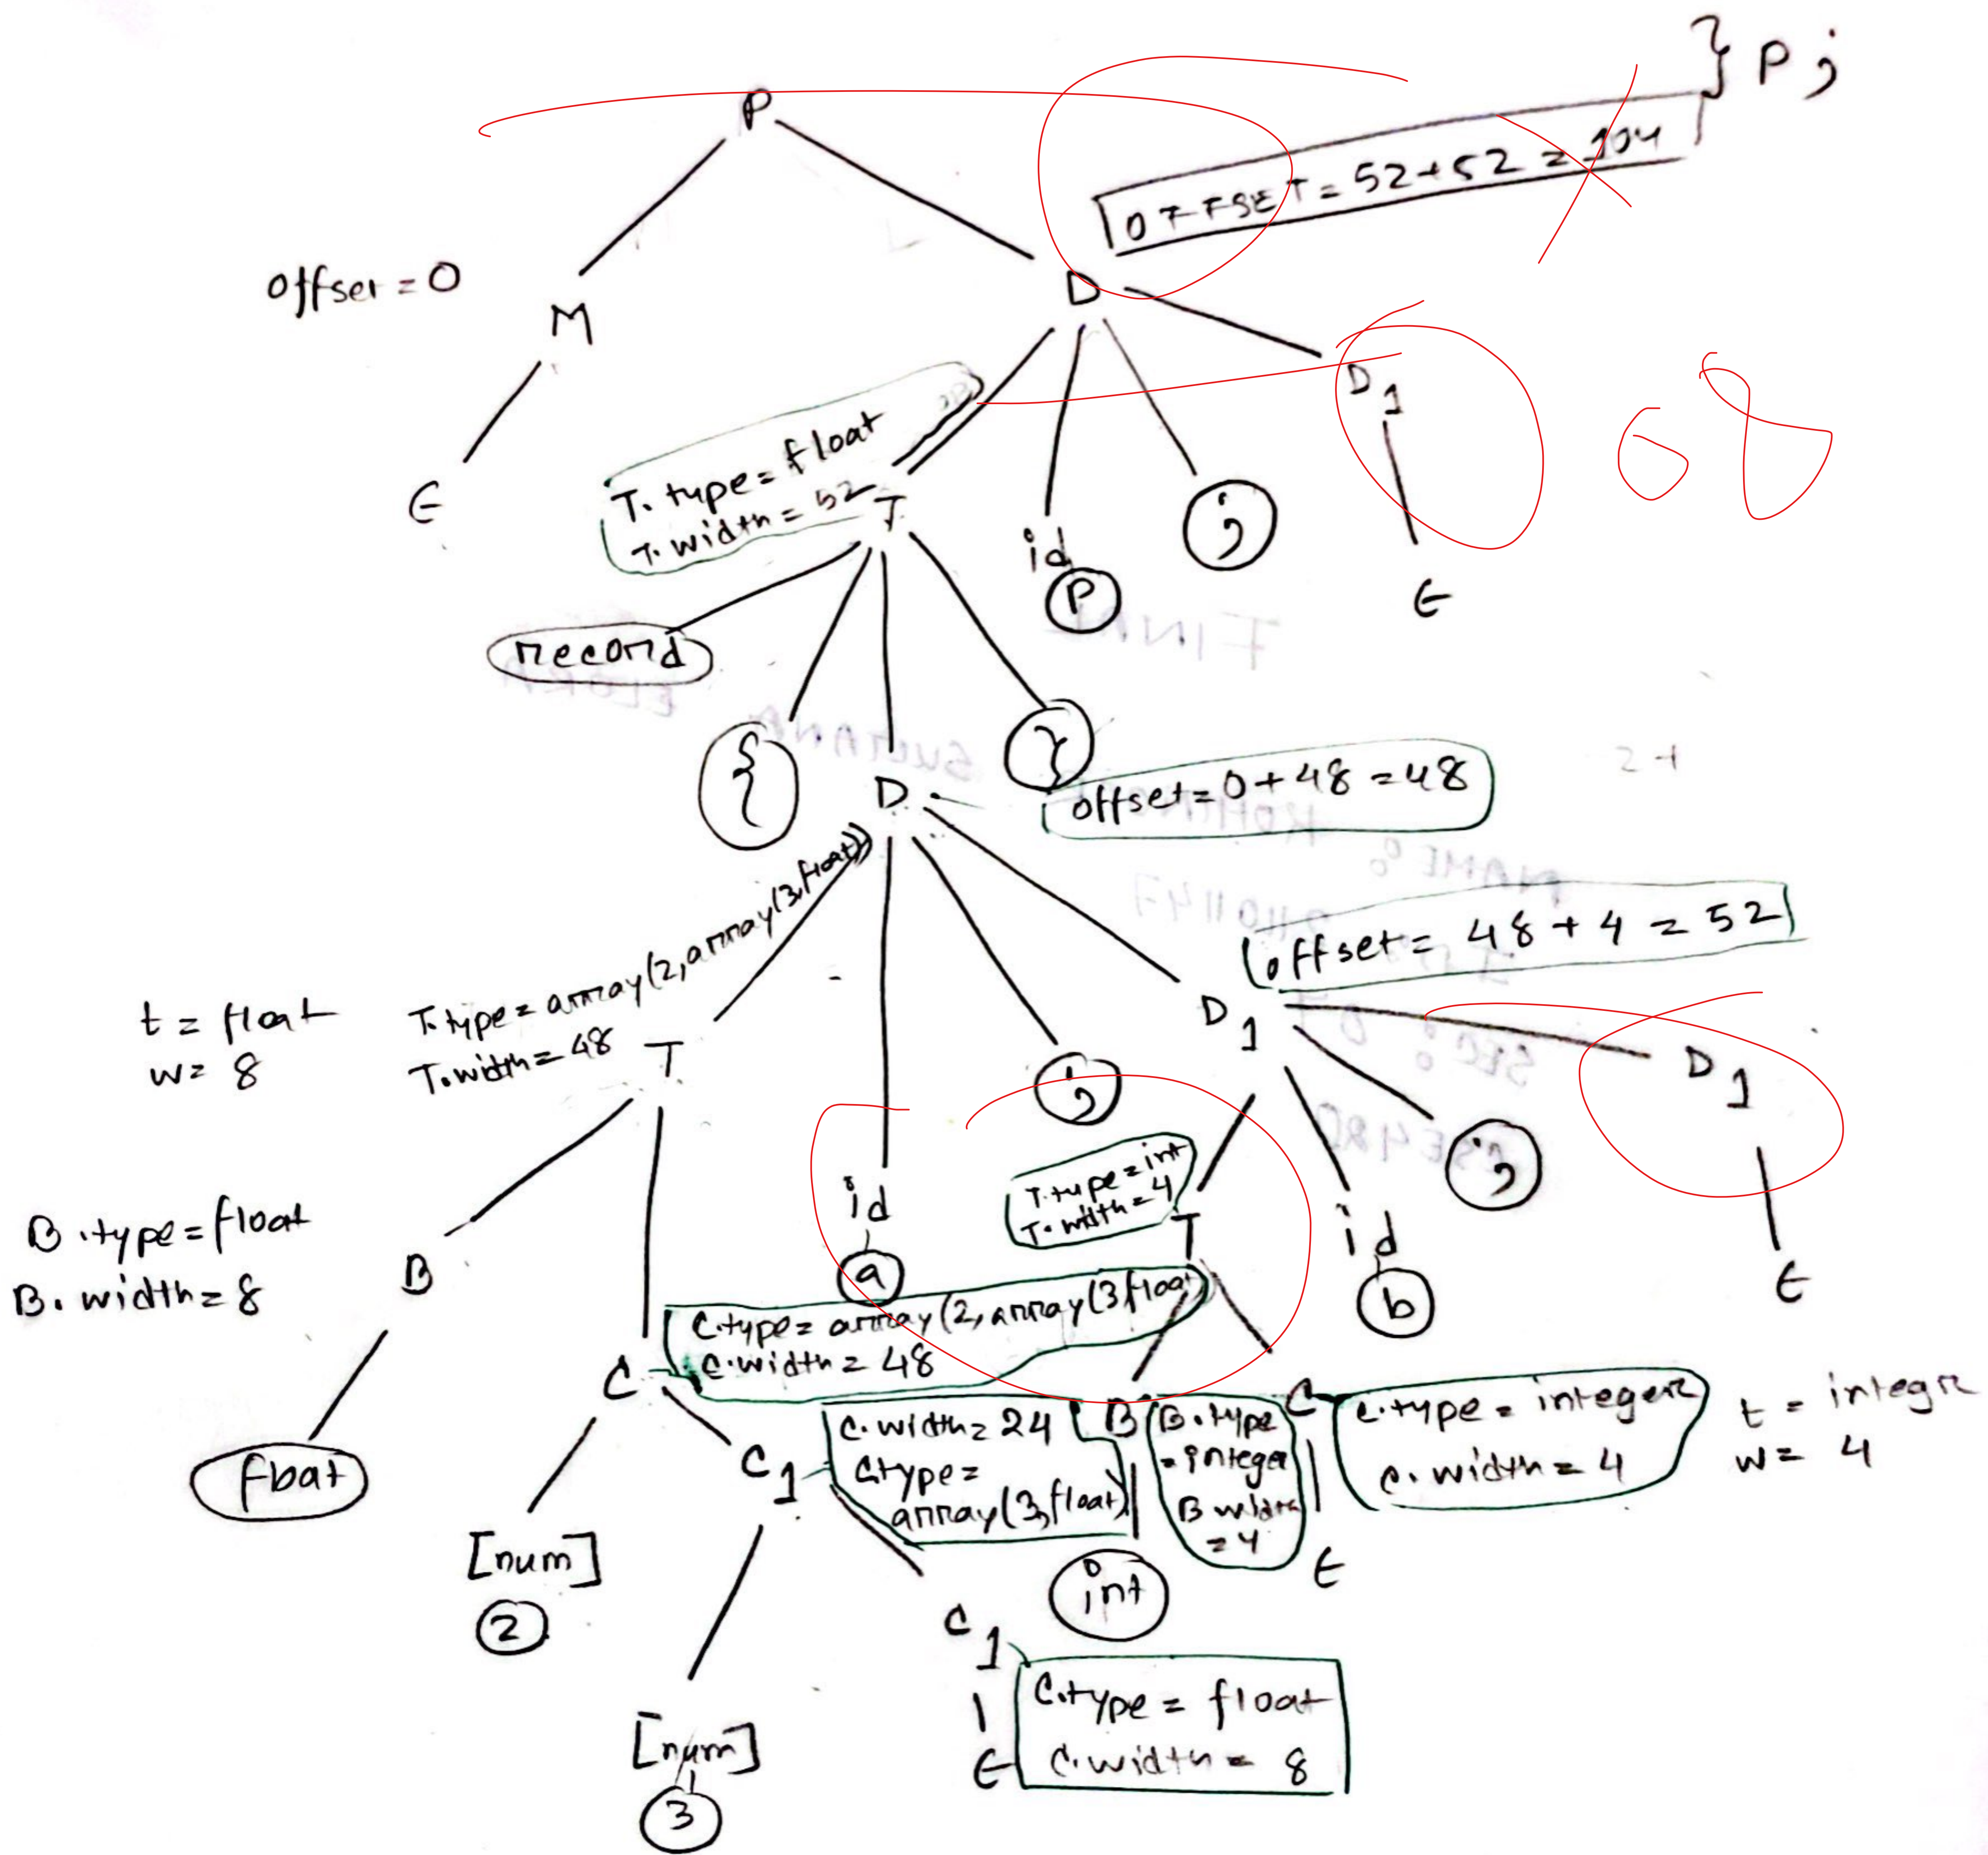

ANSWER TO QUESTION 02

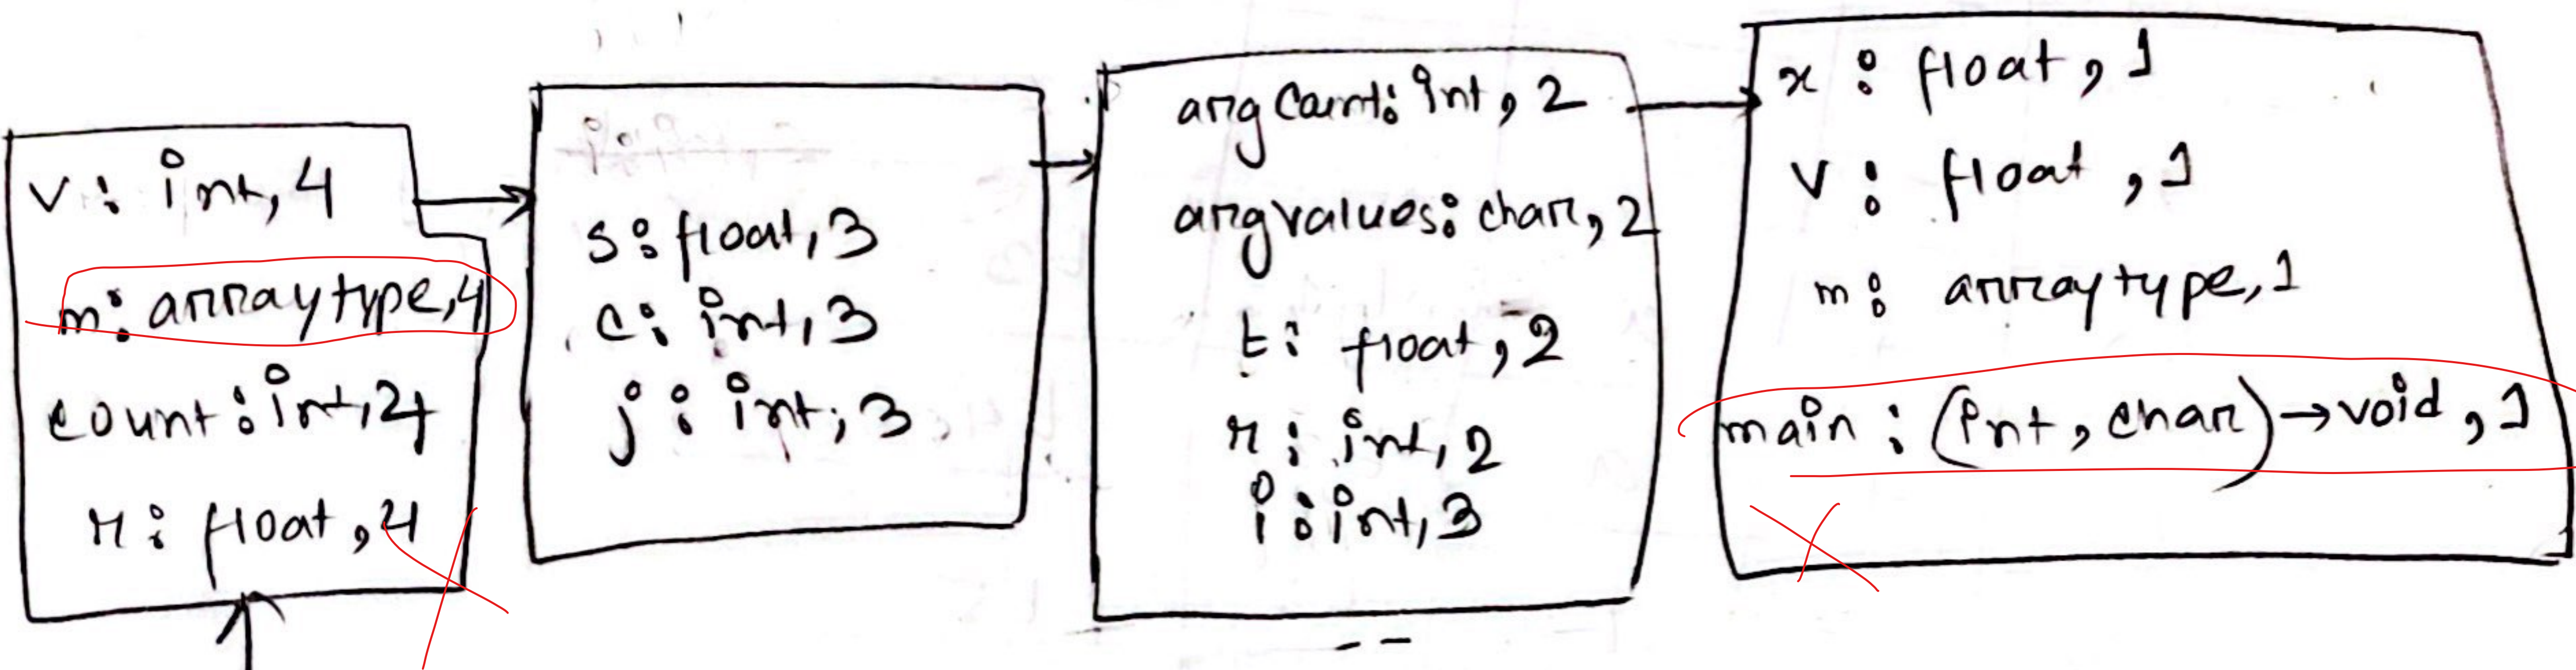

m: float, 5

07


ROUGH
defining new var.

t	n	z	v
↑	↑		↑
type	name		initial val

to Float(arg) = x

Float

(a)

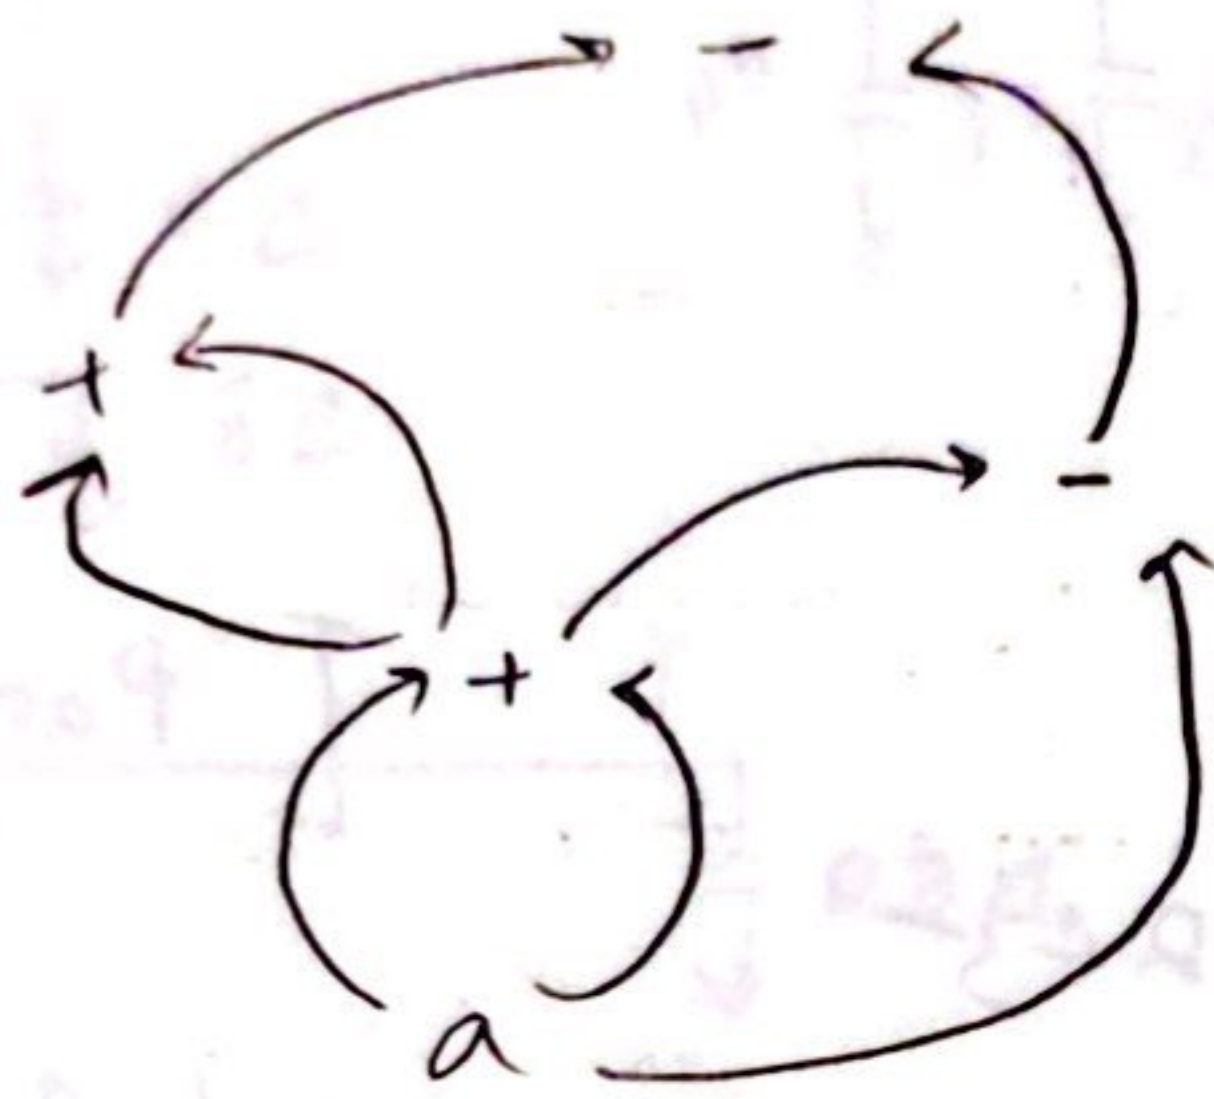

$$= ((a+a) + a+a) - ((a+a) - a)$$

3 address codes of $((a+a) + a+a) - ((a+a) - a)$

(0) $t_1 = a+a$

(1) $t_2 = t_1 - a$ ✓

(2) $t_3 = \cancel{t_1 + a} \quad a + t_1$

(3) $t_4 = \cancel{t_3 + a} \quad a + t_3$

(4) $t_5 = t_4 - t_2$

(5) $a = t_5$

(b) Quadruples :

	OP	arg 1	arg 2	result
(0)	+	a	a	t ₁
(1)	-	t ₁	a	t ₂
(2)	+	a	t ₁	t ₃
(3)	+	a	t ₃	t ₄
(4)	-	t ₄	t ₂	t ₅
(5)	=	t ₅		a

Triples :

	OP	arg 1	arg 2
(0)	+	a	a
(1)	-	(0)	a
(2)	+	a	(0)
(3)	+	a	(2)
(4)	-	(3)	(1)
(5)	=	(4)	