


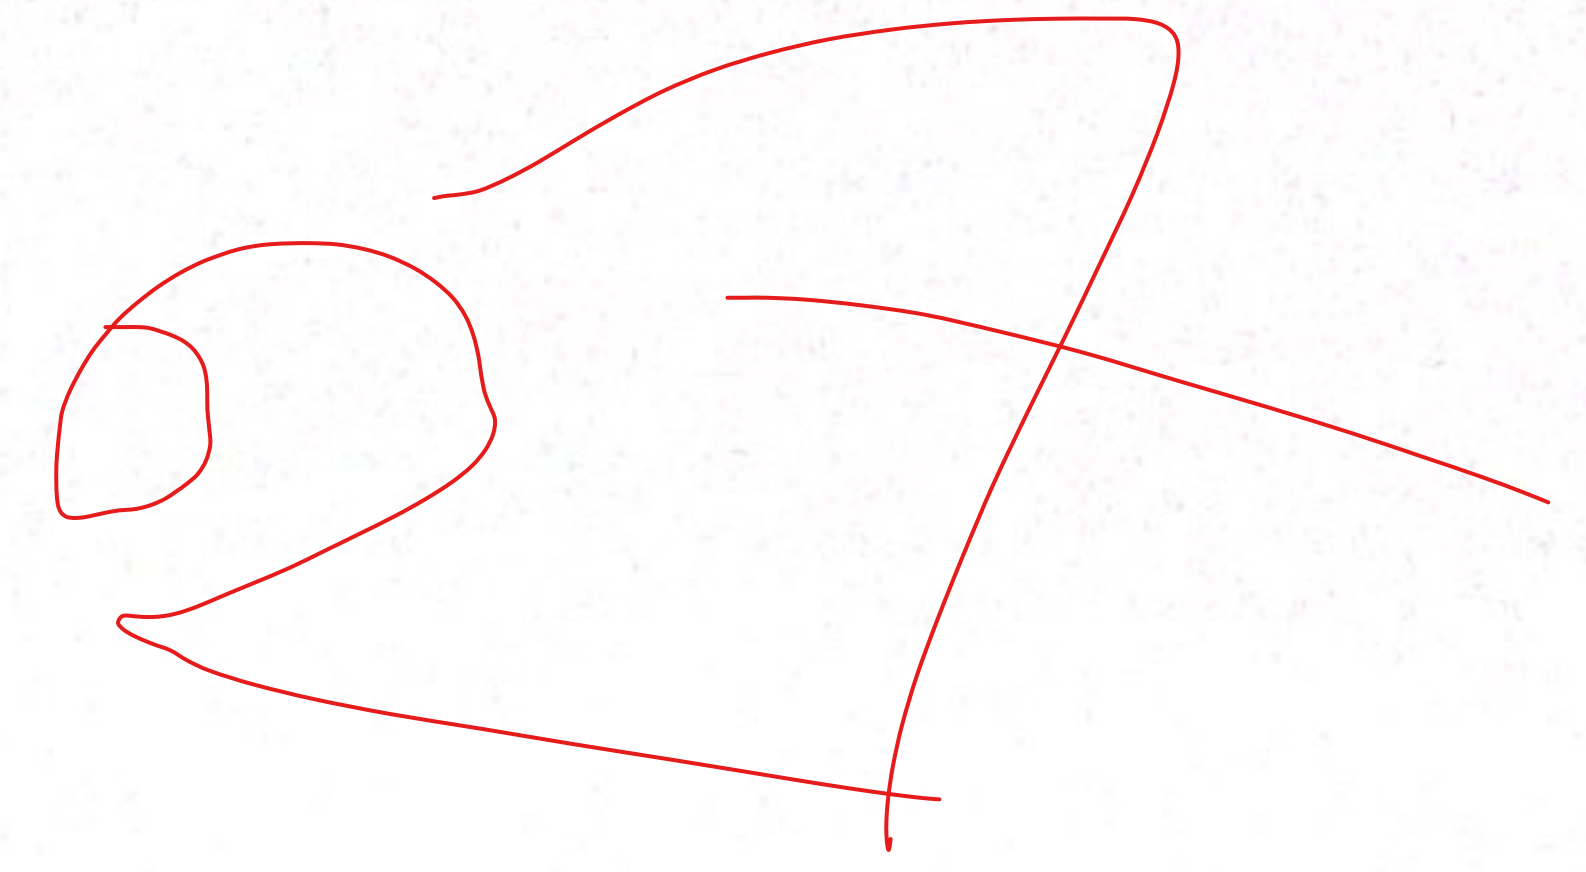

Final

CSE 420

Meherin Majid Piperi

ID: 21101146


Sec: 07

Set:

Input: record { float [2] [3] a;
int b; } r;

15/5/99 - 10/5/99


~~offer 1. 300k~~
~~type 2. 100k~~
~~with 50~~

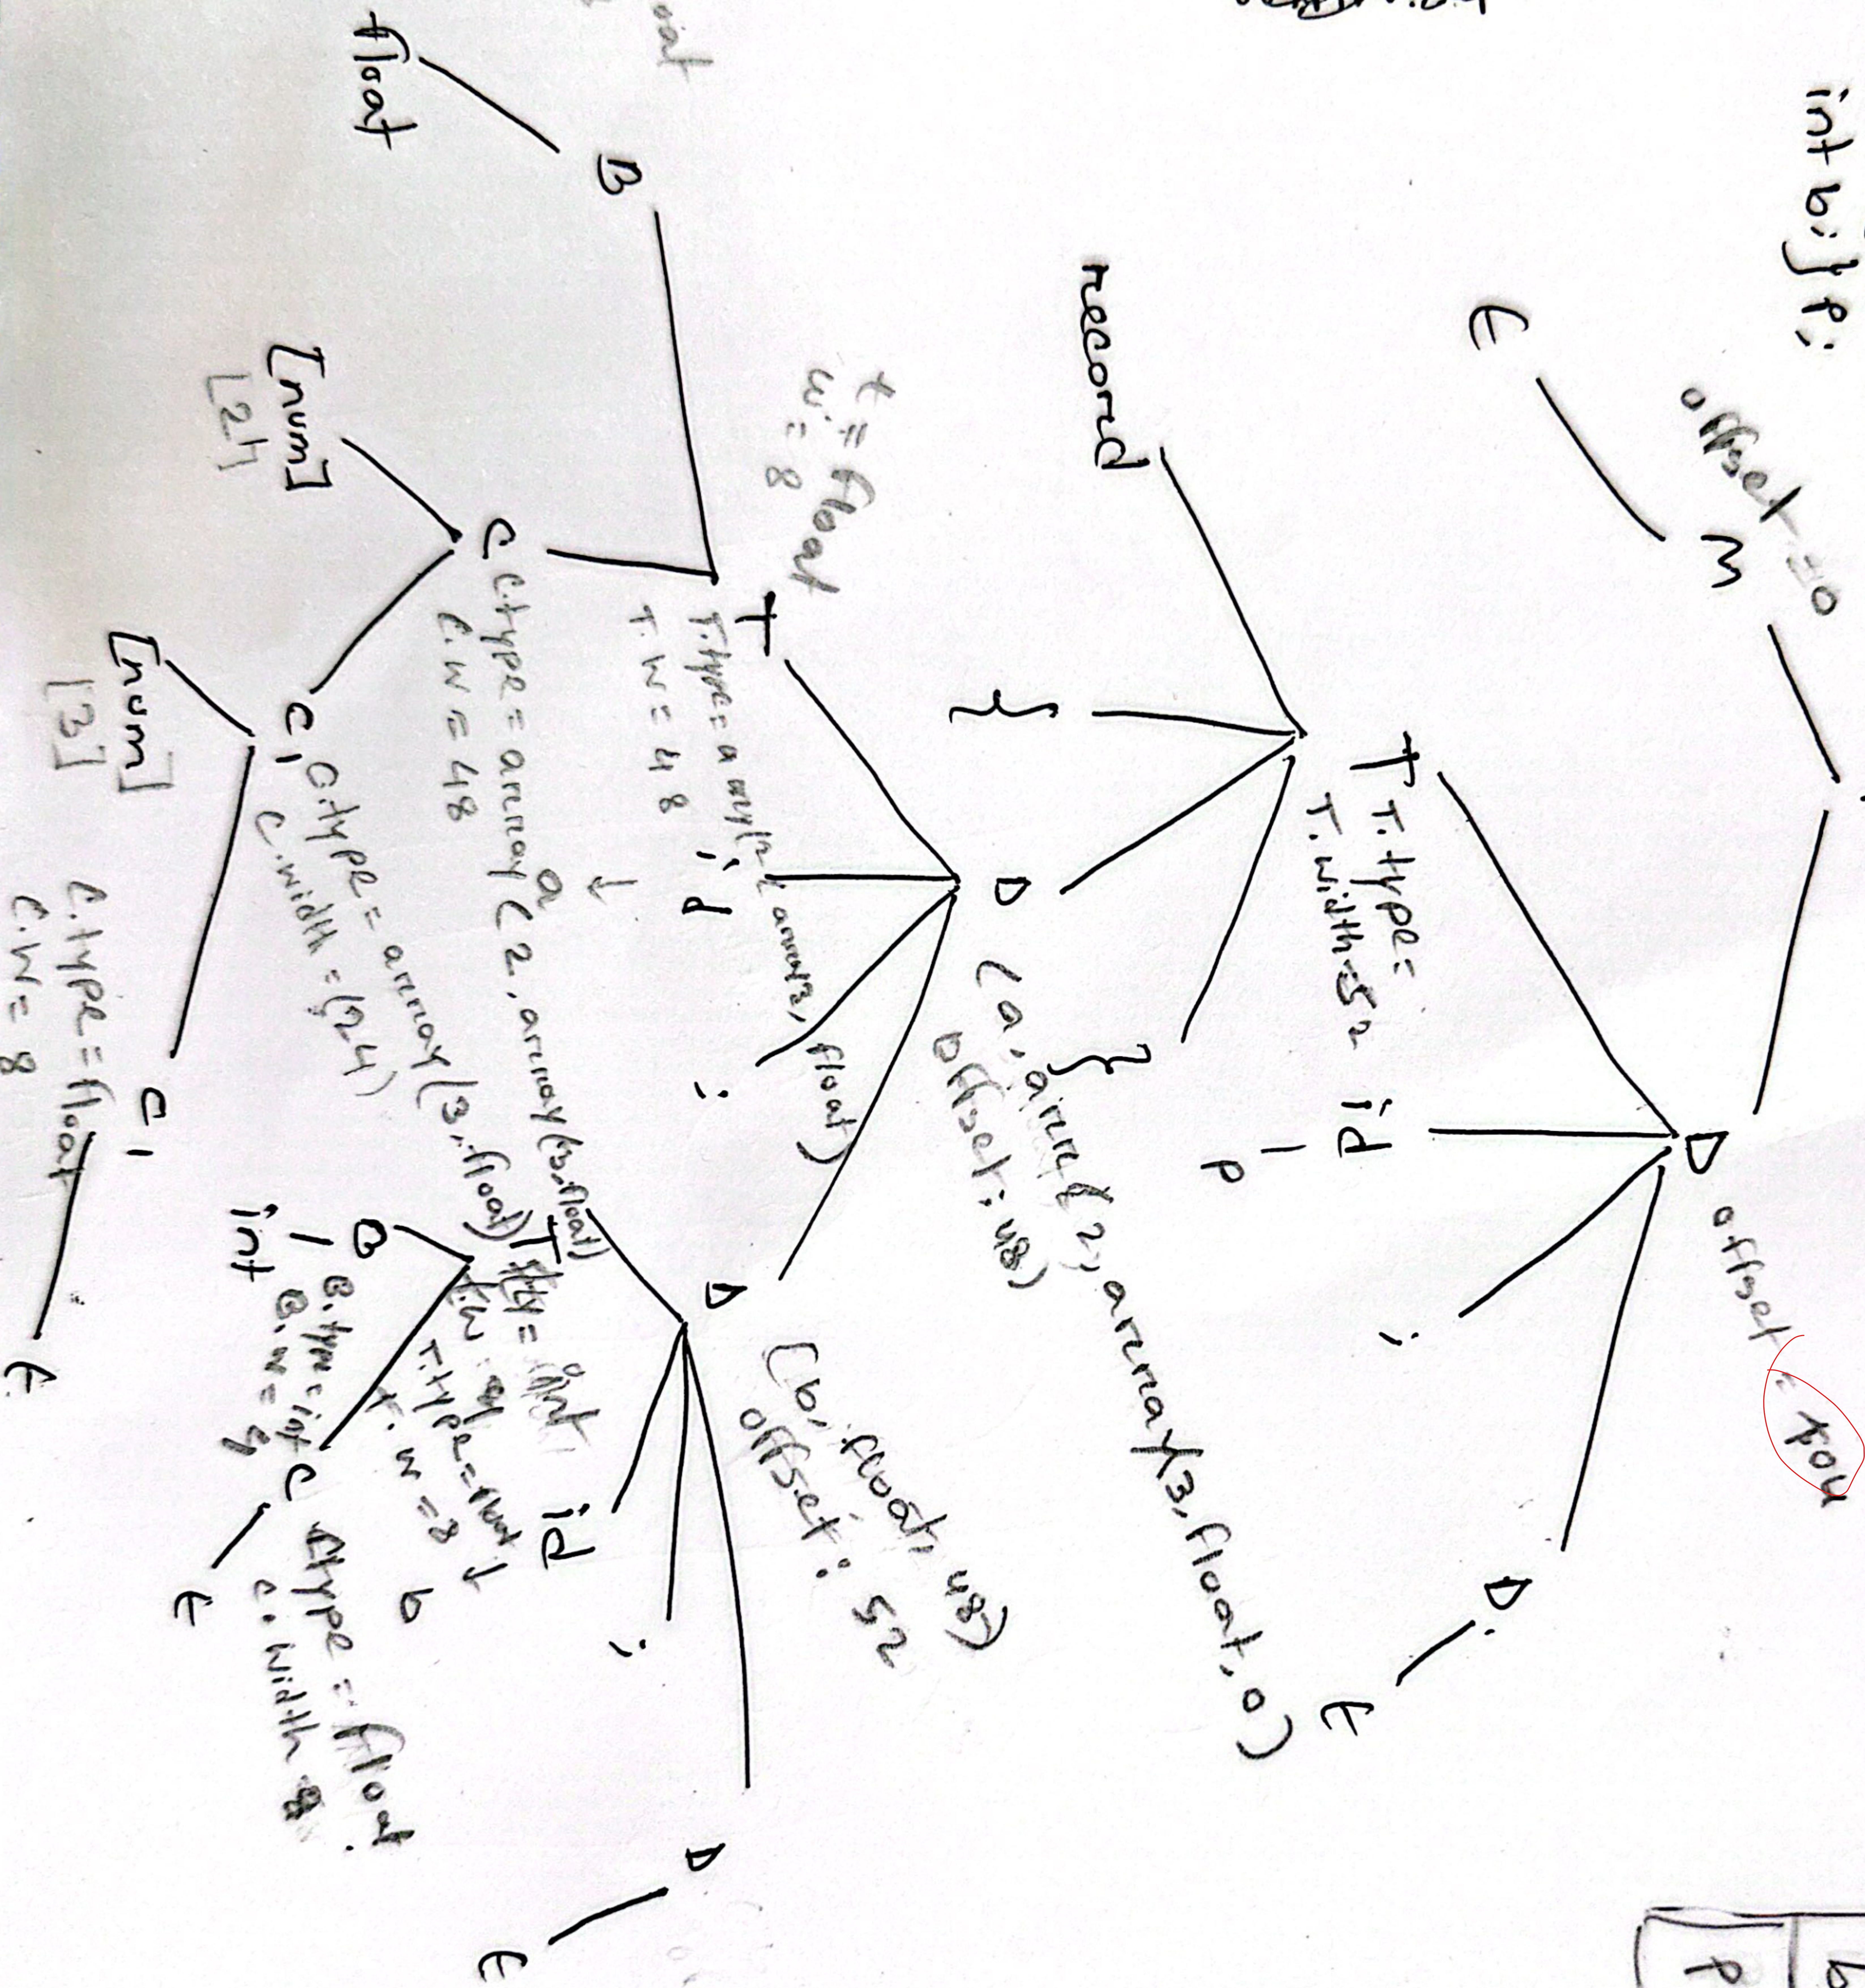

1 no

a	-float	0
b	int	4
c	quest	52

offset: 8452
t = float "h1"
w = 8452

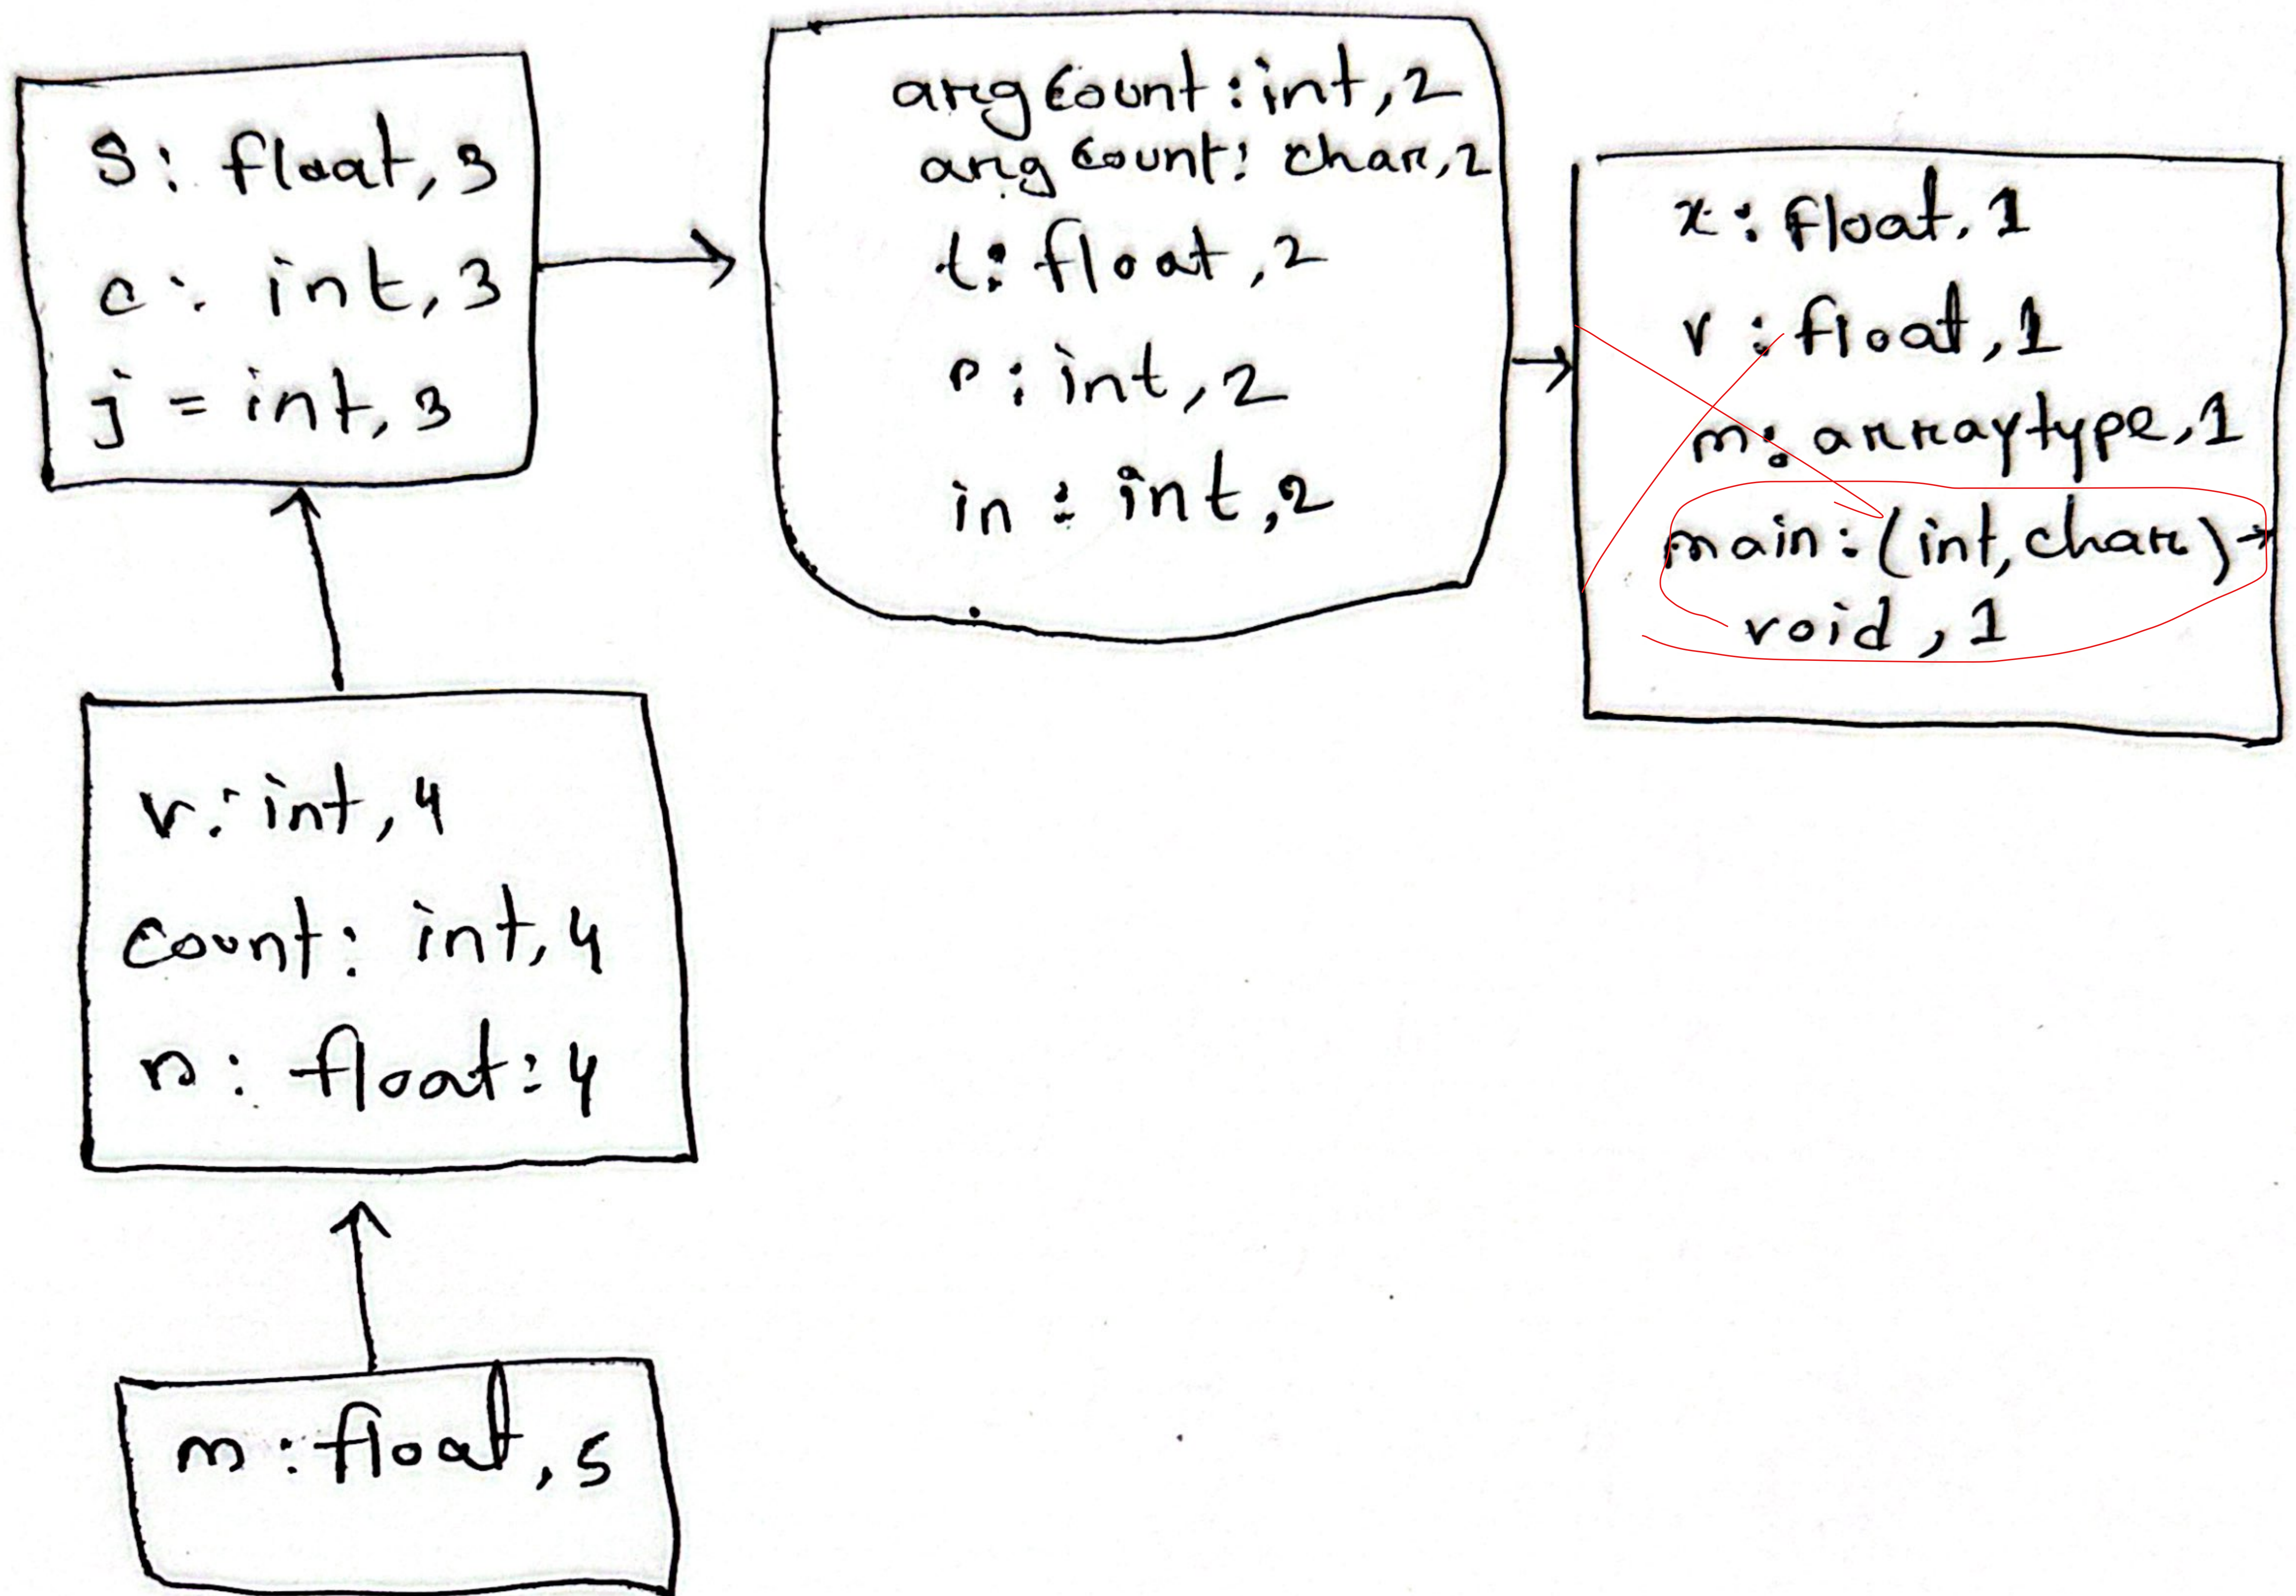2 Nofor, $r = p * m$ 

3

Ans no: 3


Another way

$$t_1 = (a+a)$$

$$t_2 = t_1 + t_1$$

$$t_3 = t_2 - t_1$$


$$t_4 = t_3 - a$$

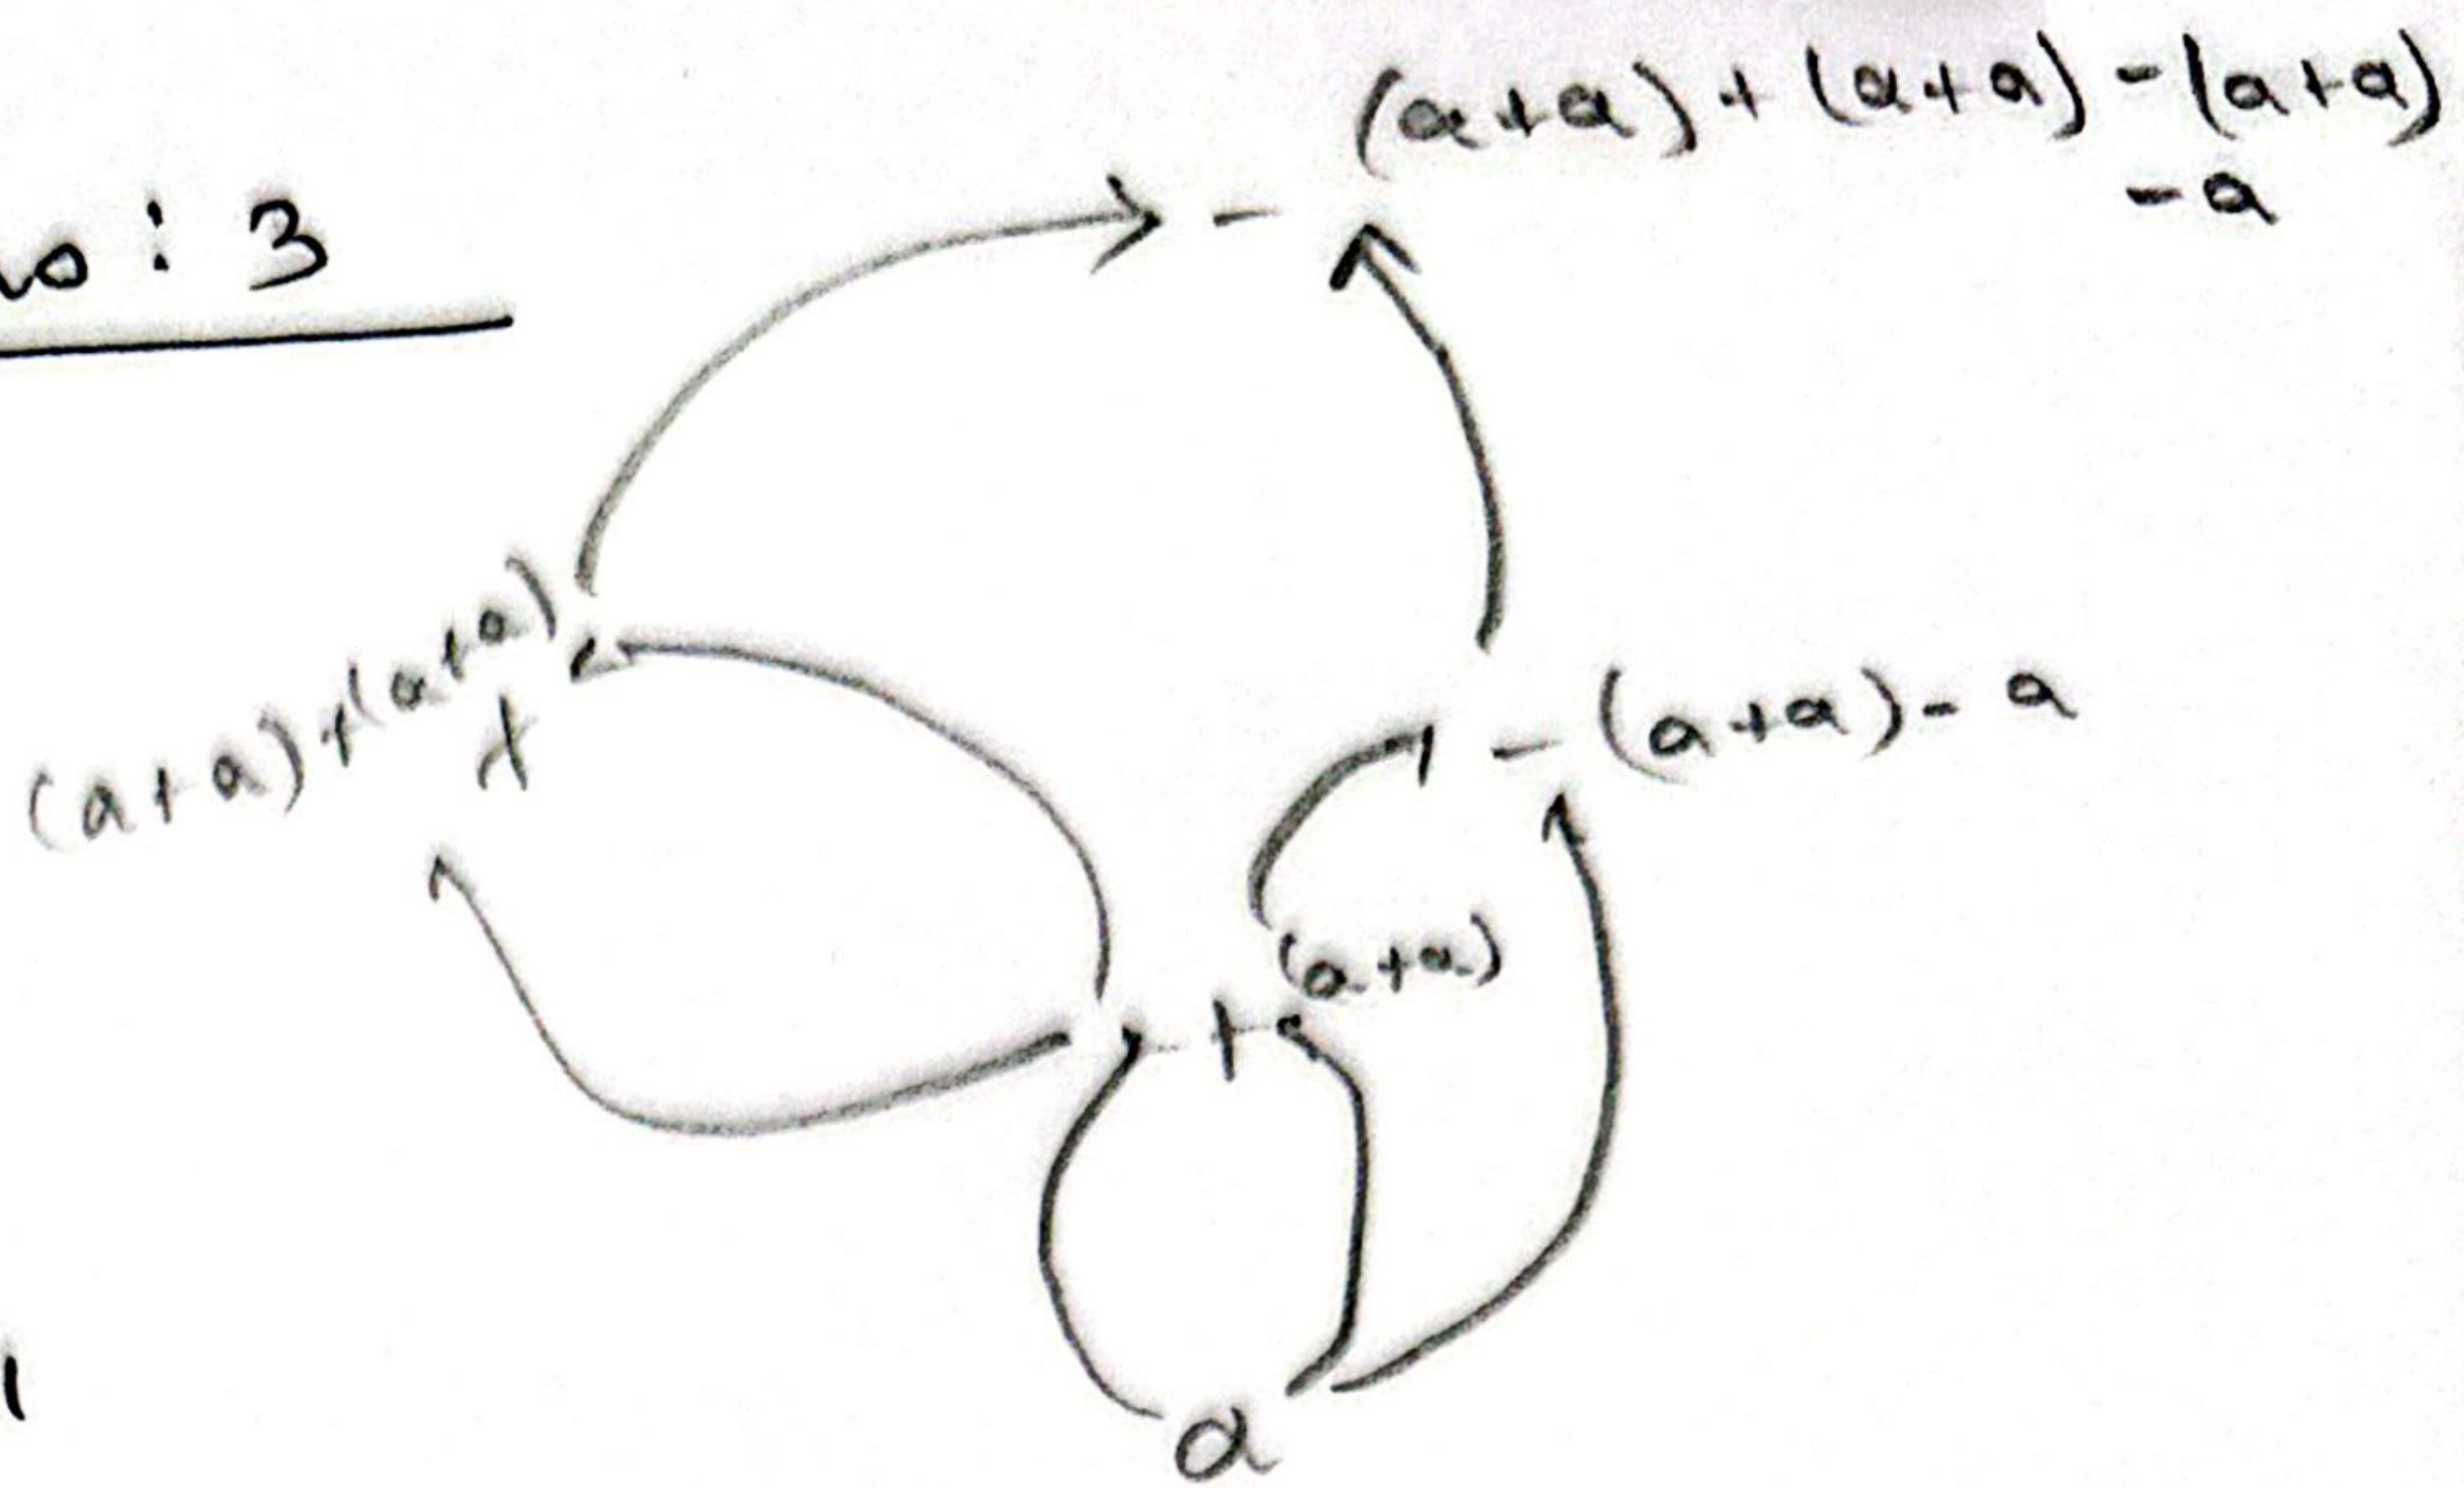

	op	arg 1	arg 2	Result
0	+	a	a	t_1
1	+	t_1	t_1	t_2
2	-	t_2	t_1	t_3
3	-	t_3	a	t_4

	op	arg 1	arg 2
0	+	a	a
1	+	0	0
2	-	1	0
3	-	2	a

extra
3No:

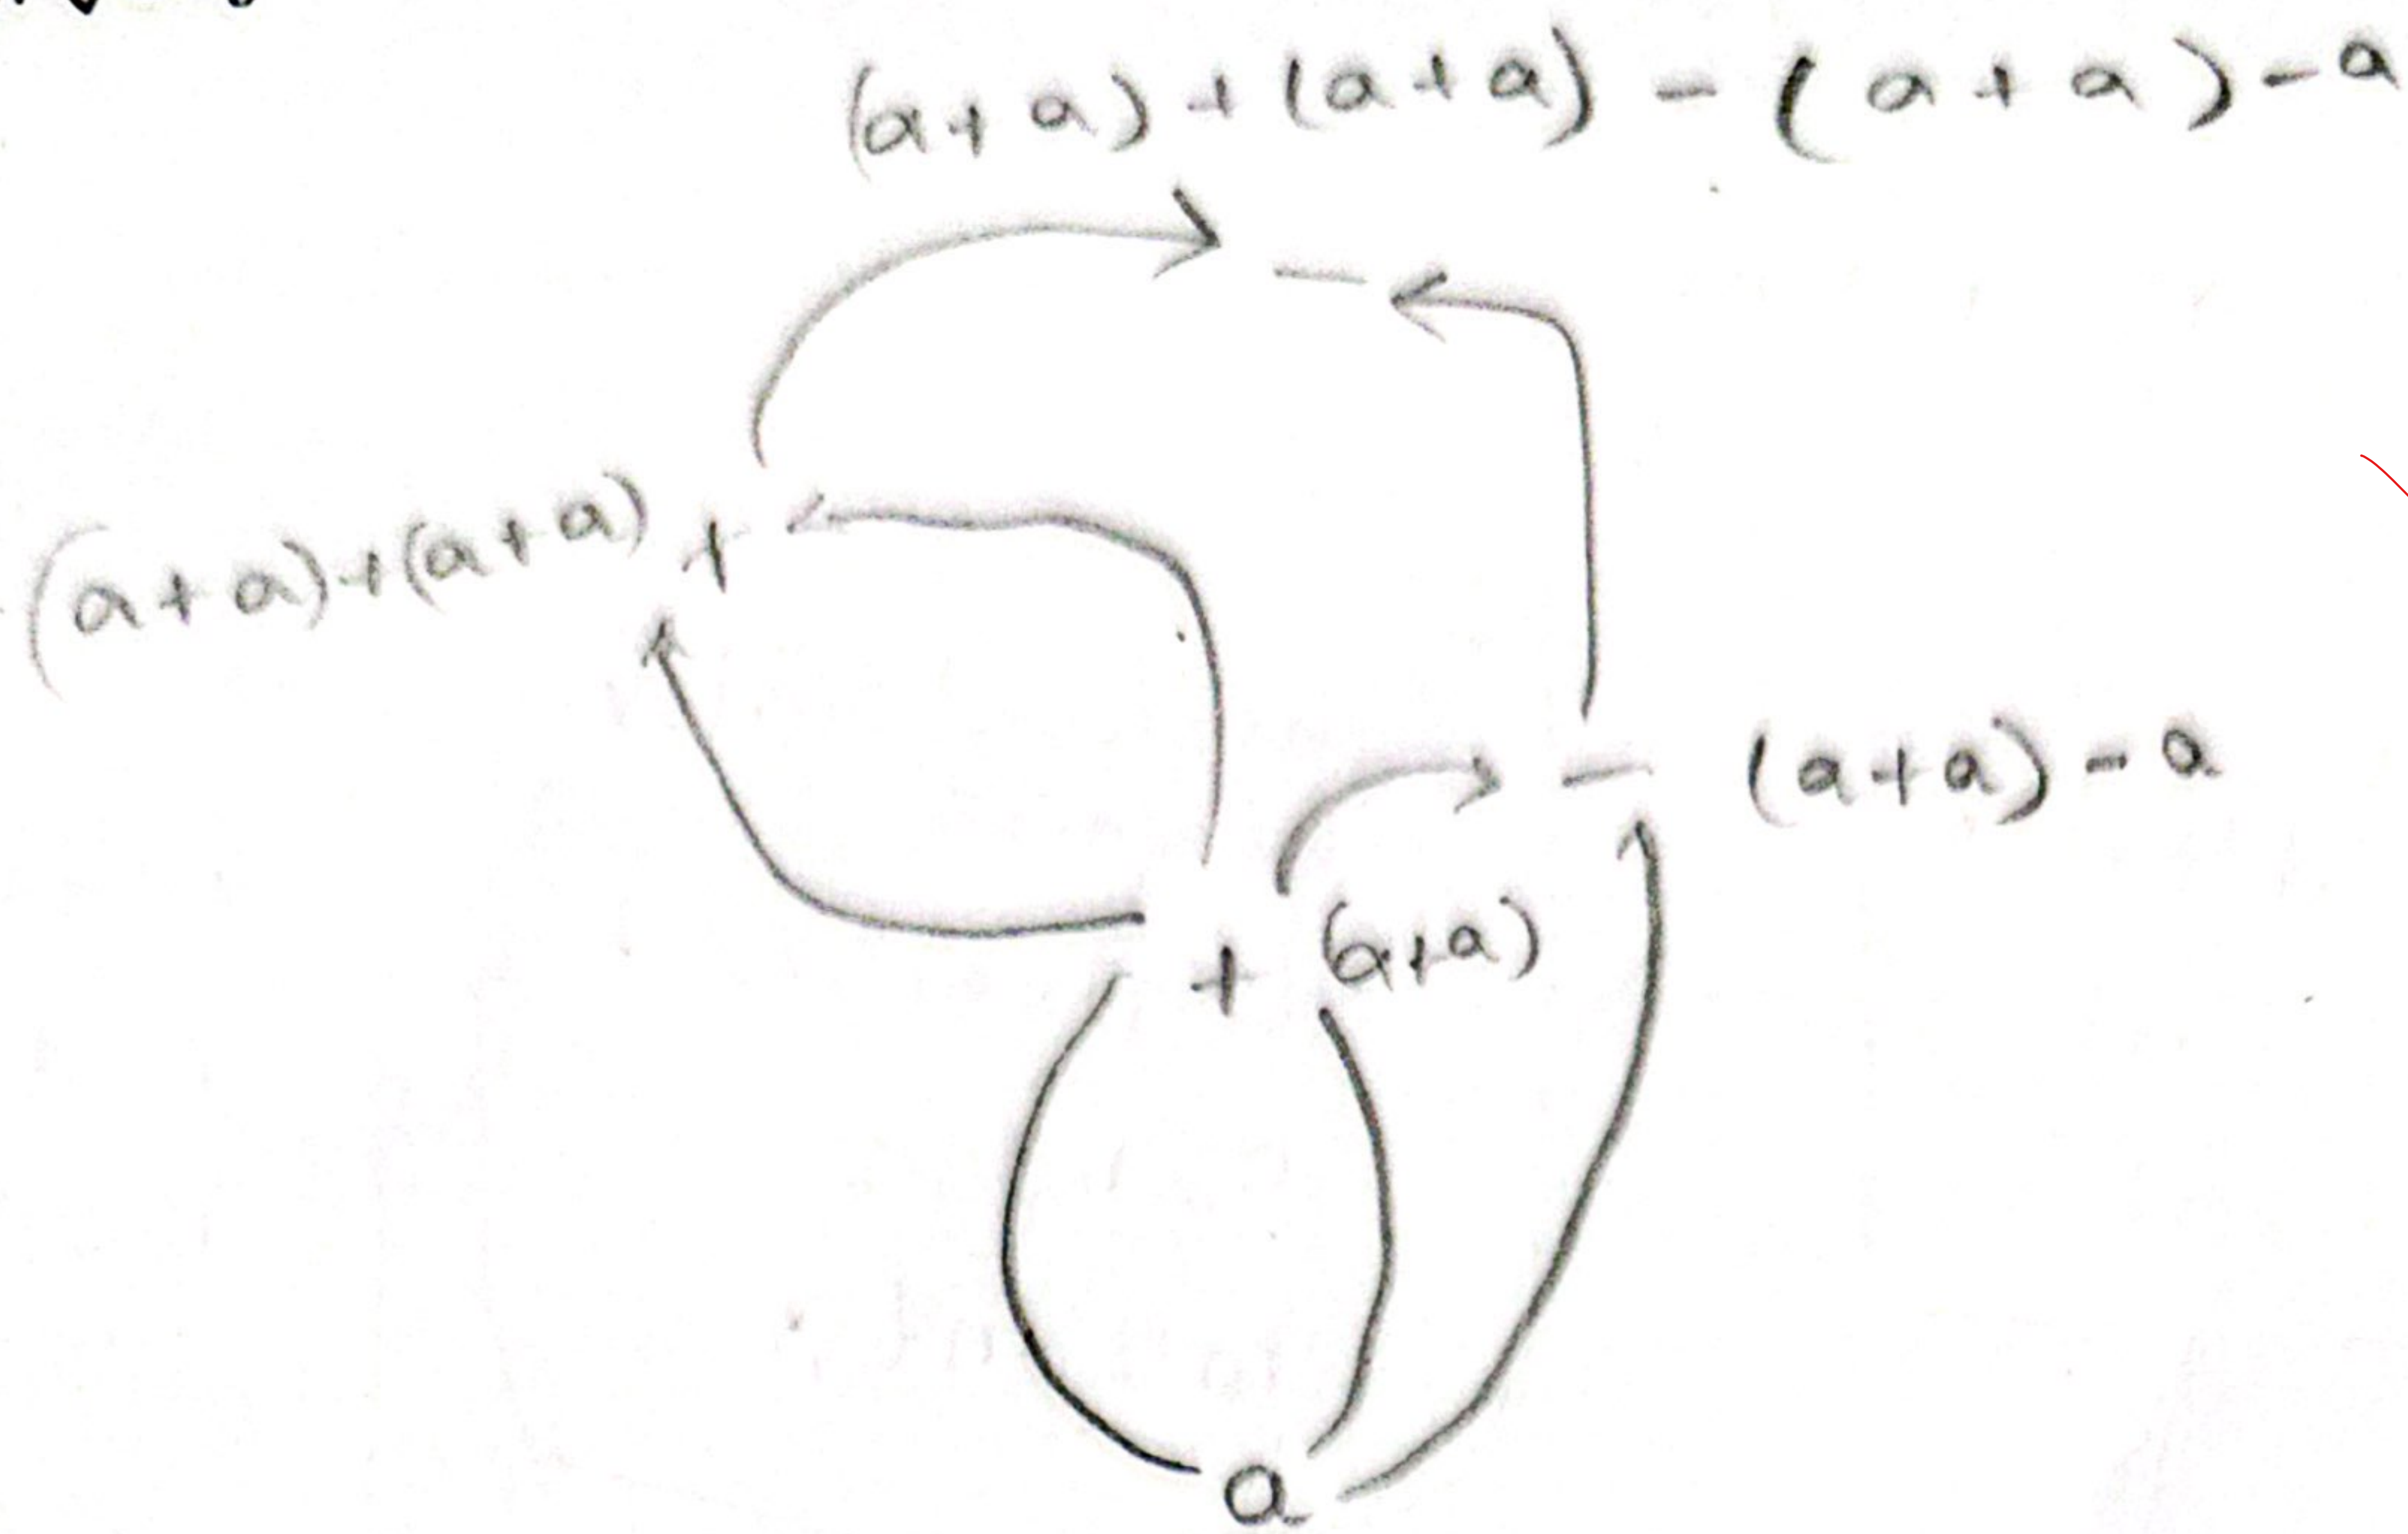

$$t_1 = (a+a)$$

$$t_2 = t_1 + t_1$$

$$t_3 = t_1 - a$$

$$t_4 = t_2 - t_3$$

	op	arg1	arg2	arg3
0	+	a	a	t_1
1	+	t_1	t_1	t_2
2	-	t_1	a	t_3
3	-	t_1	t_3	t_4

	op	arg1	arg2
0	+	a	a
1	+	0	0
2	-	0	a
3	-	1	2