

CSE420

Name: Swaperjita Tanha Akond Rodela

ID: 21301117


Section: 07


2/ float x = 0.0;
 float v = 0.0;
 int [10][20] m;

1 Void main (int argCount, char* [] argValues) {
 x = toFloat (arg V[1]);
 m = readMatrixFrom File (arg V[2]);
 2 float t = 1.0;
 int r = 10;
 for (int i = 0; i < r; i += 1) {

float s = 0.0;
 3 for (int c = 20;
 for (int j = 0; j < c; j++) {

int v = m[i][j];
 int count = 0;
 float r = 1.0;
 while (count < v) {
 count += 1;
 float m = sqrt(x);
 r = x * m;
 }

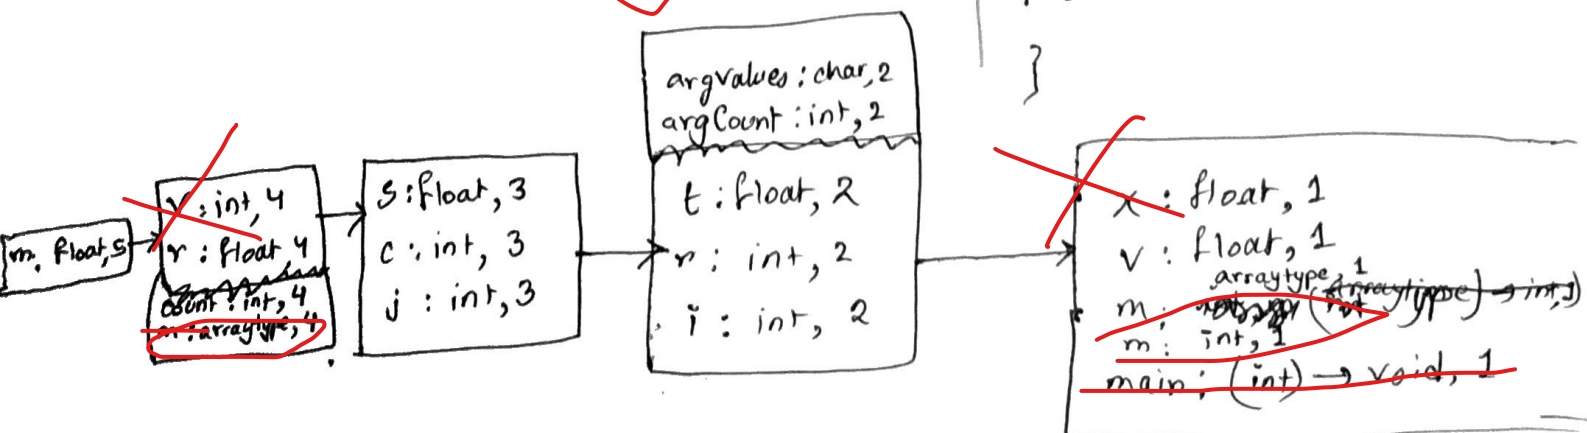

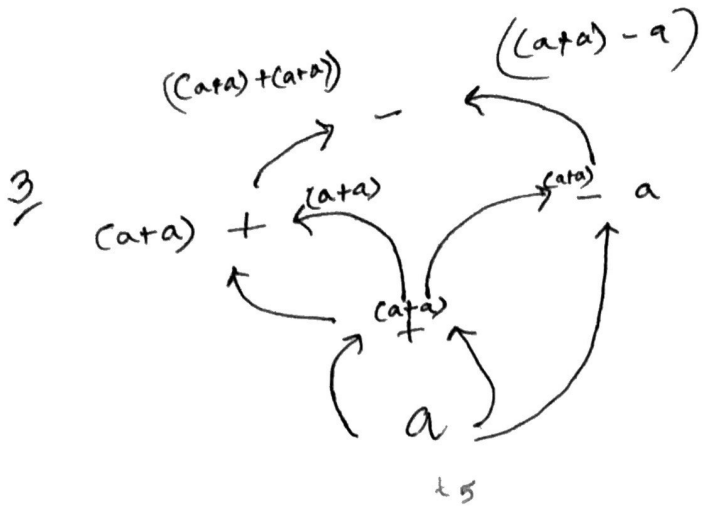

67

$$((a+a) + (a+a)) - ((a+a) - a)$$

3 address code

- (0) $t_1 = a + a$
 (1) $t_2 = t_1$
 (2) $t_3 = t_1 + t_2$
 (3) $t_4 = t_1 - a$
 (4) $t_5 = t_3 - t_4$

Quadruples

	op	arg1	arg2	result
0	+	a	a	t_1
1	=	t_1	-	t_2
2	+	t_1	t_2	t_3
3	-	t_1	a	t_4
4	-	t_3	t_4	t_5

triples

	op	arg1	arg2
0	+	a	a
1	=	(0)	-
2	+	(0)	(1)
3	-	(0)	a
4	-	(2)	(3)