

26.5

Name : Tania Zaman


ID : 20301296

Sec : 08

Course : CSE420

input :

record { float [2][3] a; int b; } P;

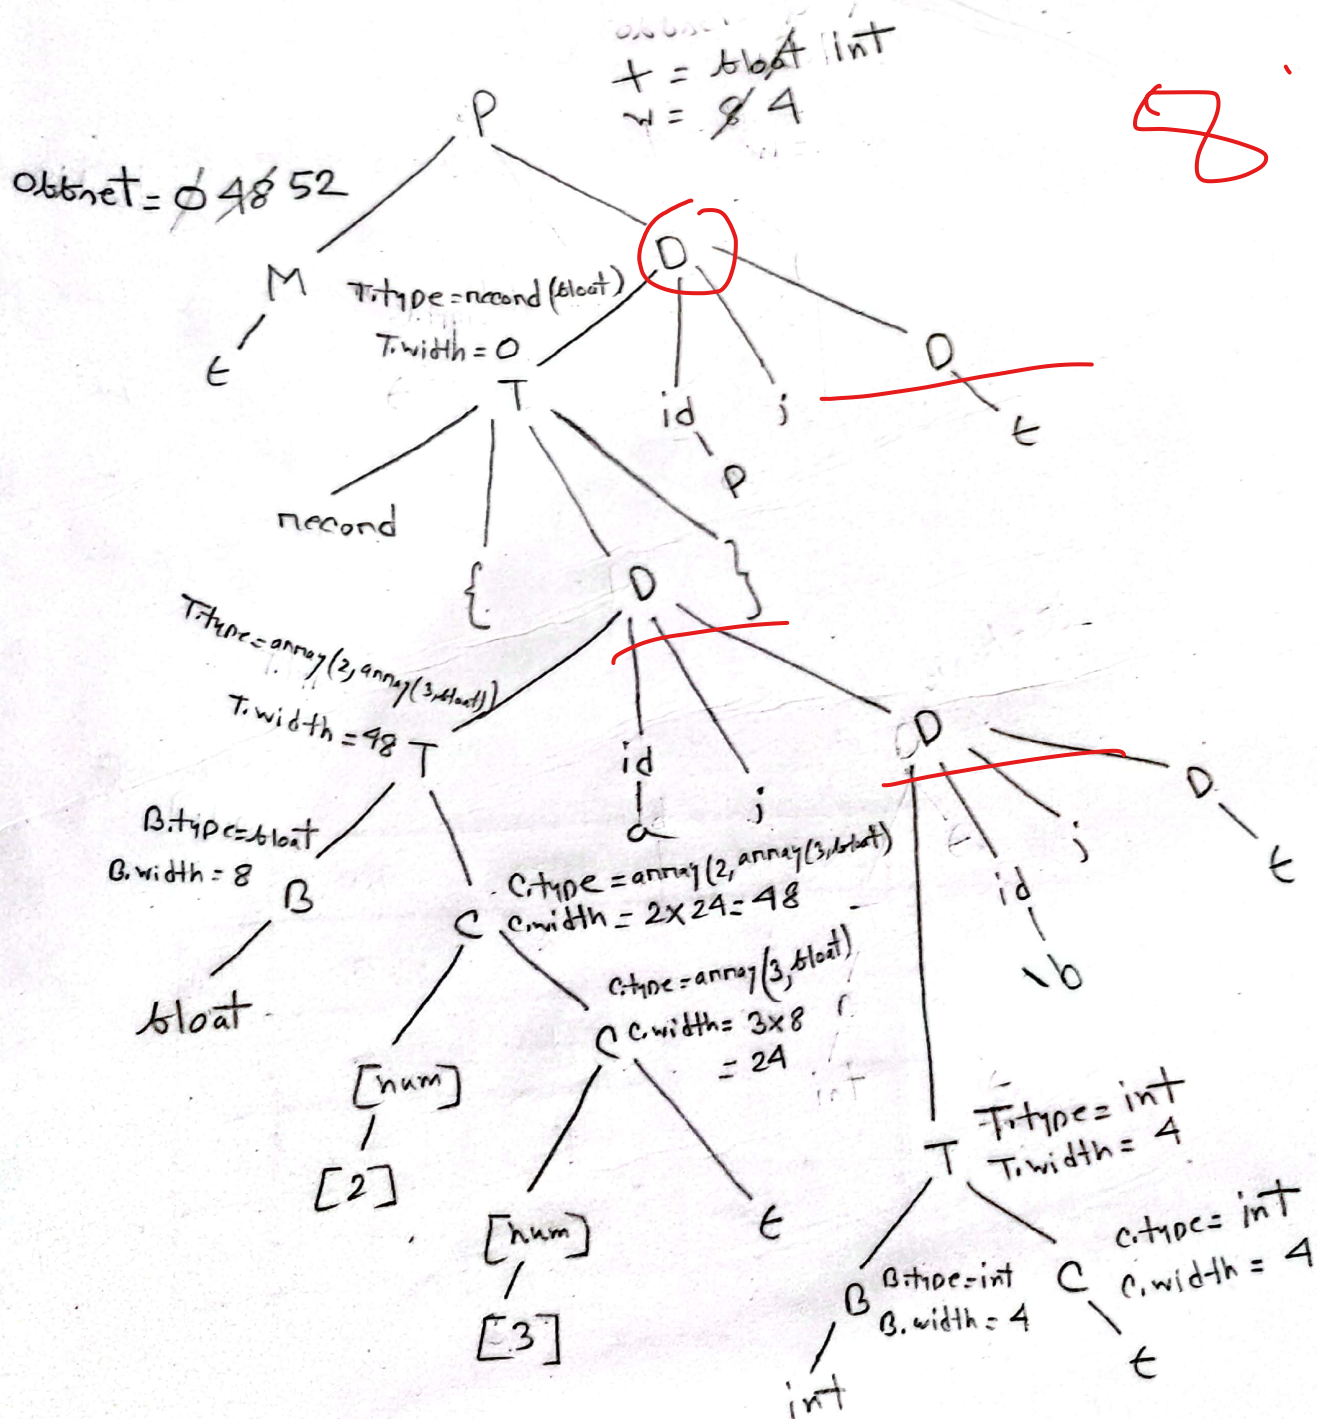

Am to the qn no: 2

1

```
[ float u = 0.0 ;  
  float v = 0.0 ;  
  int [10] [20] m ;  
  void main (int argc, char* [ ] argv) {
```

2

```
  x = toFloat (argv[1]);  
  m = readMatrixFromFile (argv[2])  
  float f = 1.0 ;  
  int n = 10 ;  
  for (int i = 0, i < n, i += 1) {
```

3

```
    float s = 0.0 ;  
    int c = 20 ;  
    for (int j = 0, j < c, j += 1) {  
      int v = m [i] [j] ;
```

4

```
      int count = 0 ;  
      float r = 1.0 ;  
      while (count < v) {
```

5

```
        count += 1 ;  
        float += 1  
        float m = sqrt (x) ;  
        n = n * m ;  
      }
```

4

```
    s = s + r
```

}



4

```
    print ln (s) ;  
    t = t * s
```

}


[print ln (t)

}

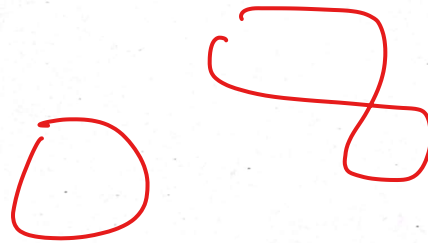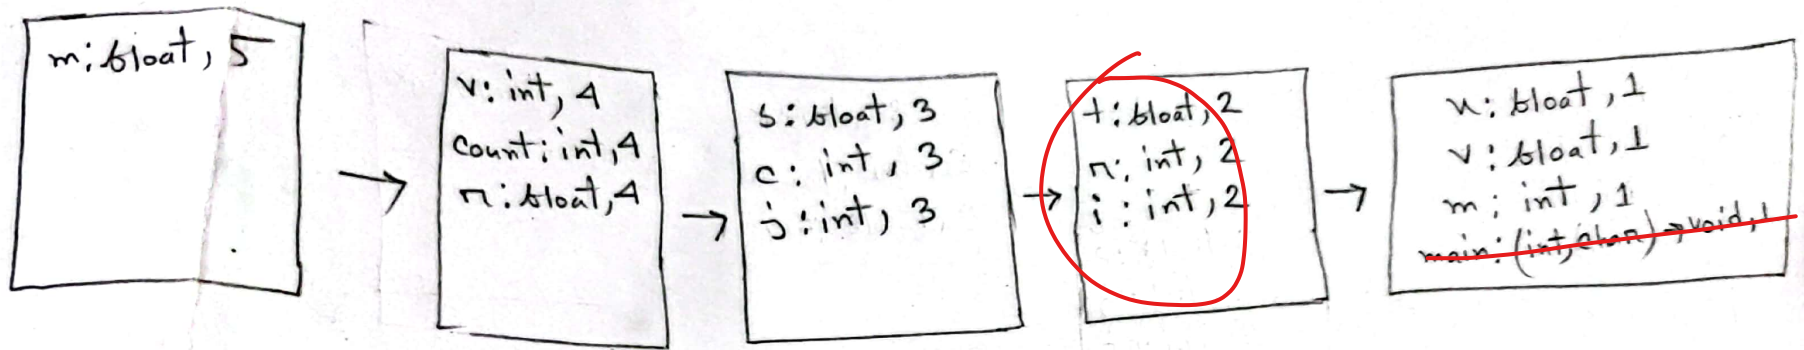

Ans to the qm no: 3

$$((a+a)+(a+a)) - ((a+a)-a)$$

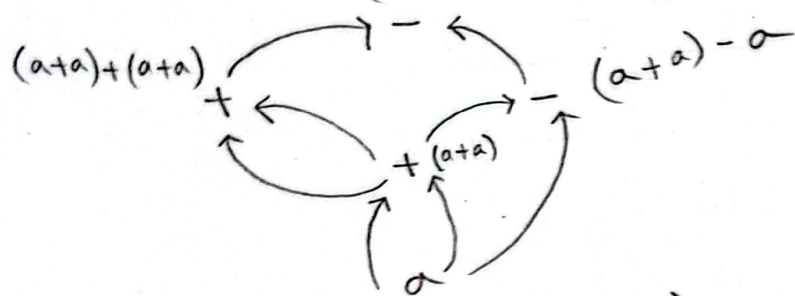

$$((a+a)+(a+a)) - ((a+a)-a)$$



- 0 $t_1 = a + a$
- 1 $t_2 = t_1 - a$
- 2 $t_3 = t_1 + t_1$
- 3 $t_4 = t_3 - t_2$

(b)

Quadruples

	op	arg1	arg2	result
(0)	+	a	a	t_1
(1)	-	t_1	a	t_2
(2)	+	t_1	t_1	t_3
(3)	-	t_3	t_2	t_4

Triple

	op	arg1	arg2
(0)	+	a	a
(1)	-	(0)	a
(2)	+	(0)	(0)
(3)	-	(2)	(1)