



```
record { float [2][3] a; int b; } p;
```




t : ~~float~~ integer

w : 8/4

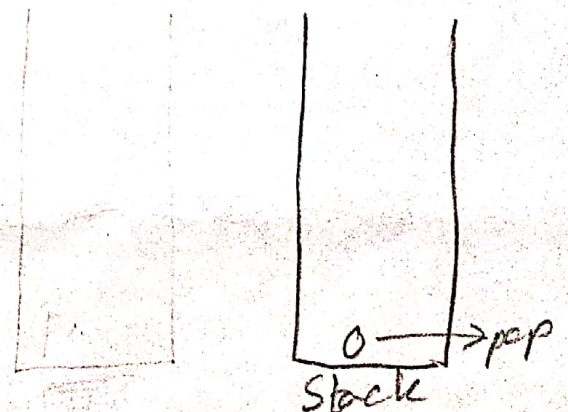


2.

08

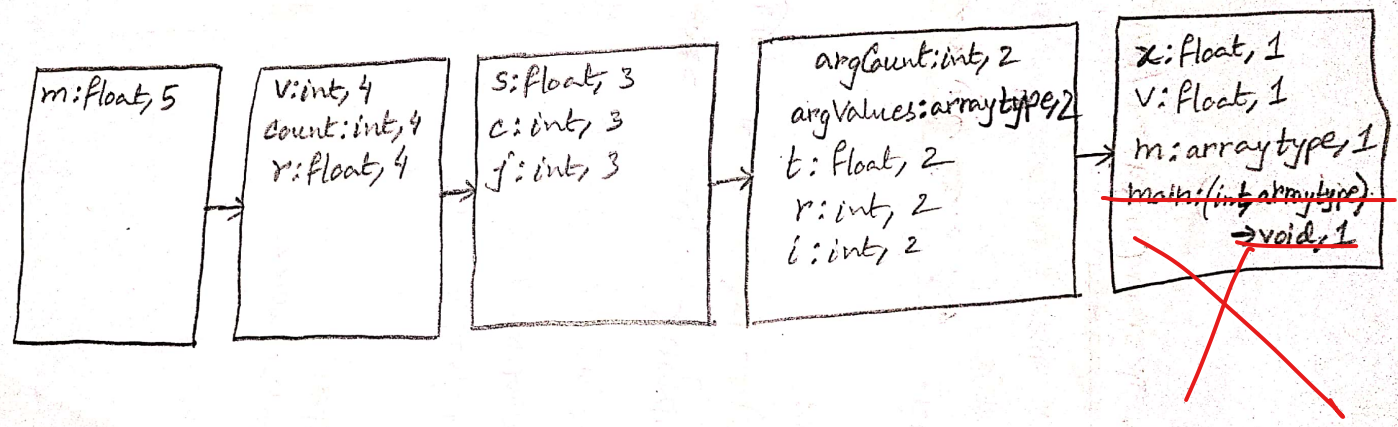

(3)

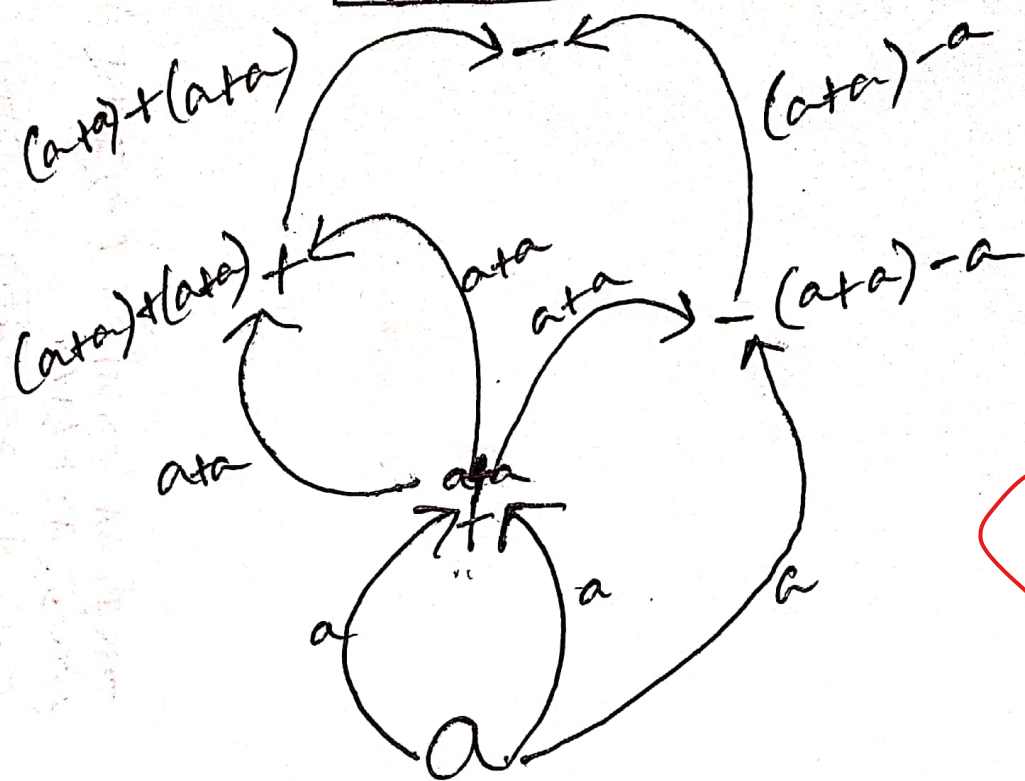

6.5

(a) 3 address code: $(ata) + (ata) - (ata) - a$

① $t1 = \text{~~ata~~ } a$

② $t2 = \text{~~ata~~ } ata$

③ $t3 = \text{~~ata~~ } \text{~~ata~~ } - t2$

④ $t4 = t3 - t1$

⑤ $t5 = a + a$

⑥ $t6 = t5 + t4$

⑦ $t7 = a + a$

⑧ $t8 = t7 + t6$

(b) Quadruples

	op	arg 1	arg 2	result
0.	=	a	-	t1
1.	+	a	a	t2
2.	uninus	t2	-	t3
3.	-	t3	t1	t4
4.	+	a	a	t5
5.	+	t5	t4	t6
6.	+	a	a	t7
7.	+	t7	t6	t8

Triples

	op	arg 1	arg 2
0.	=	a	-
1.	+	a	a
2.	uninus	(1)	-
3.	-	(2)	(0)
4.	+	a	a
5.	+	(4)	(3)
6.	+	a	a
7.	+	(6)	(5)