


Umma Hafsa Tahsin
21201523

CSE420 Final

Section: 07
Date: 18.12.23

26

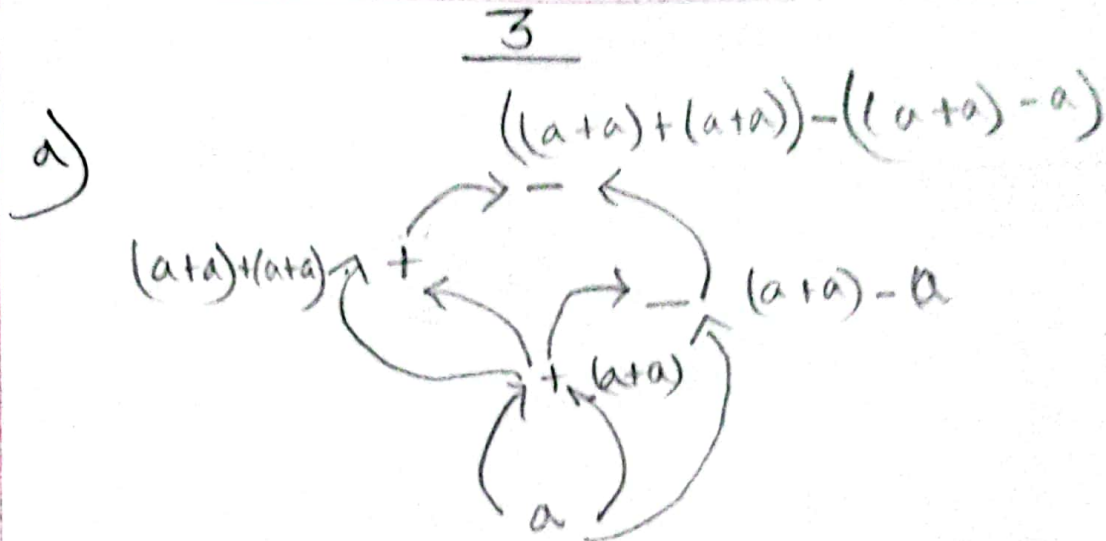

$$\underbrace{((a+a) + (a+a))}_{t_2} - \underbrace{((a+a) - a)}_{t_3}$$

3 address code

(0) $t_1 = a + a$

(1) $t_2 = t_1 + t_1$

(2) $t_3 = t_1 - a$

(3) $t_4 = t_2 - t_3$

b) Quadruples

	op	arg1	arg2	result
(0)	+	a	a	t ₁
(1)	+	t ₁	t ₁	t ₂
(2)	-	t ₁	a	t ₃
(3)	-	t ₂	t ₃	t ₄

Triples

	op	arg1	arg2
(0)	+	a	a
(1)	+	(0)	(0)
(2)	-	(0)	a
(3)	-	(1)	(2)

2

```
s: float, 3  
c: int, 3  
j: int, 3
```

```
argcount: int, 2  
argvalues: char, 2  
+ : float, 2  
r : int, 2  
i : int, 2
```

```
x: float, 1  
v: float, 1  
m: int, 1  
main: (int, char) -> void, 1
```

```
v: int, 4  
count: int, 4  
m: float, 4
```

```
m: float, 5
```

80

