

MASTERPLAN APLIKASI

PRIMA RIB CONTENT PLAN

Version 1.1

Status: Blueprint / Pre-Development

Target: Internal Team Prima RIB

Platform: Web App Responsive

Development: Antigravity

Repository: GitHub

Database & Backend: Supabase

Deployment: Vercel

01. VISI APLIKASI

Prima RIB Content Plan adalah aplikasi internal untuk mengelola seluruh proses produksi konten Prima RIB dalam satu sistem terpusat.

Aplikasi bukan hanya kalender posting, tetapi menjadi **Content Management System** yang mengatur:

**IDE → PLANNING → PRODUCTION → REVIEW → APPROVAL → SCHEDULE
→ PUBLISH → ANALYZE**

Tujuan akhirnya adalah membuat proses produksi konten lebih:

- Terorganisir
 - Terukur
 - Kolaboratif
 - Mudah dipantau
 - Mudah dievaluasi
 - Tidak bergantung pada spreadsheet/chat yang terpisah
-

02. MASALAH YANG INGIN DISELESAIKAN

Aplikasi dibuat untuk mengatasi:

- Ide konten tercecer.
- Jadwal posting tidak terorganisir.

- Tidak tahu status suatu konten.
 - Brief desain/video terpisah.
 - Copywriting terpisah.
 - Sulit mengetahui PIC.
 - Sulit memonitor deadline.
 - Sulit melakukan review dan revisi.
 - Sulit melihat keseimbangan konten CPNS, Sekdin, dan Polri.
 - Sulit melihat konten yang sudah dipublish.
 - Data performa konten tidak terdokumentasi.
 - Evaluasi masih berdasarkan feeling.
-

03. KONSEP BESAR

Aplikasi memiliki tiga lapisan utama.

CONTENT PLANNING

Mengelola:

- Ide
- Kalender
- Program
- Content Pillar
- Target Audience
- Objective
- Format
- Platform
- Campaign

CONTENT PRODUCTION

Mengelola:

- Brief
- Copywriting
- Script
- Design
- Video
- Asset
- Assignment
- Revision

CONTENT PERFORMANCE


Mengelola:

- Publish

- Reach
- Views
- Likes
- Comments
- Shares
- Saves
- Engagement
- Performance
- Evaluation

04. STRUKTUR MENU

PRIMA RIB
CONTENT PLAN

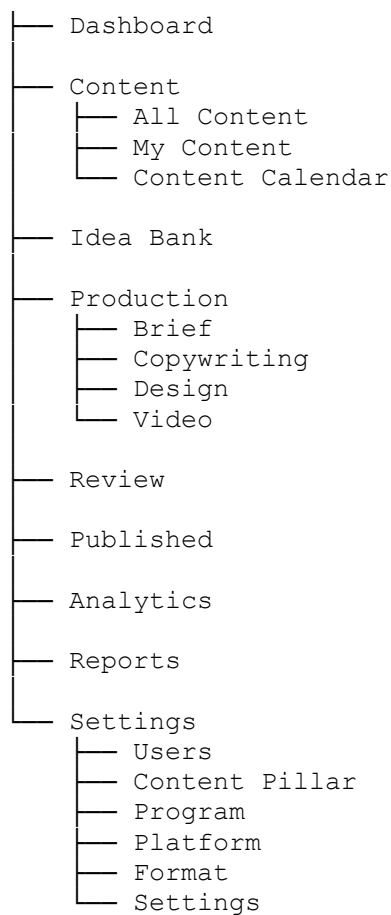

Menu dan akses akan disesuaikan berdasarkan **Role User**.

05. DASHBOARD

Dashboard adalah halaman utama setelah login.

KPI

- Total Content
- This Month
- In Production
- Waiting Review
- Scheduled
- Published

Content Pipeline

IDE
↓
PLANNED
↓
BRIEF
↓
PRODUCTION
↓
REVIEW
↓
REVISION
↓
APPROVED
↓
SCHEDULED
↓
PUBLISHED
↓
EVALUATED

Upcoming Content

Menampilkan konten terdekat yang akan dipublish.

Recent Activity

Menampilkan aktivitas terbaru:

- Content dibuat
- Brief selesai
- Asset diupload
- Revision request
- Approval
- Publish

06. CONTENT DATABASE

Content Database adalah pusat seluruh konten.

Setiap content memiliki:

IDENTITAS

- Content ID
- Title
- Short Title
- Program
- Content Pillar
- Format
- Platform
- Campaign

PLANNING

- Objective
- Target Audience
- Angle
- Priority
- Publish Date
- Publish Time

WORKFLOW

- Status
- Planner
- Copywriter
- Designer
- Video Editor
- Reviewer

CONTENT

- Hook
- Main Content
- CTA
- Caption
- Hashtag
- Script
- Creative Brief

PERFORMANCE

- Views
- Reach
- Likes
- Comments

- Shares
 - Saves
 - Followers
 - Engagement Rate
-

07. CONTENT ID

Sistem membuat ID otomatis.

Format yang direkomendasikan:

PR-2026-0001
PR-2026-0002
PR-2026-0003

ID tidak terikat dengan program sehingga satu format bisa digunakan untuk semua konten.

08. PROGRAM

Program utama:

CPNS

- SKD
- TWK
- TIU
- TKP
- CAT
- Tryout
- Seleksi CPNS

SEKDIN

- IPDN
- PKN STAN
- STIN
- STMKG
- Sekolah Kedinasan lainnya

POLRI

- Bintara
- Akademik
- Psikologi

- Jasmani
- Mental
- Tahapan seleksi

GENERAL

Konten umum Prima RIB.

09. CONTENT PILLAR

Master Content Pillar:

1. **Education**
2. **Engagement**
3. **Motivation**
4. **Information**
5. **Social Proof**
6. **Promotion**
7. **Branding**

Pillar digunakan untuk menjaga komposisi konten dan menganalisis strategi konten.

10. CONTENT FORMAT

- Carousel
 - Single Feed
 - Reels
 - TikTok
 - Story
 - Poster
 - Infographic
 - Quiz
 - Announcement
 - Live
 - Video
-

11. PLATFORM

Minimal:

- Instagram

- TikTok
- Facebook
- YouTube
- WhatsApp

Satu content dapat memiliki lebih dari satu platform.

12. IDEA BANK

Idea Bank menyimpan seluruh ide mentah.

Data:

- Idea Title
- Description
- Program
- Pillar
- Source
- Priority
- Created By
- Created Date
- Status

Status:

NEW
SELECTED
PLANNED
ARCHIVED

Sebuah ide dapat dikonversi menjadi Content.

Convert to Content

13. CONTENT WORKFLOW

Workflow utama:

IDE
↓
PLANNED
↓
BRIEF
↓
PRODUCTION
↓

REVIEW
↓
REVISION
↓
APPROVED
↓
SCHEDULED
↓
PUBLISHED
↓
EVALUATED

Jika revisi:

REVIEW
↓
REVISION
↓
REVIEW

14. CONTENT DETAIL PAGE

Halaman detail content berisi:

HEADER

- Content ID
- Title
- Program
- Pillar
- Format
- Status

PLANNING

- Objective
- Target Audience
- Angle
- Priority
- Publish Date
- Publish Time
- Platform

CREATIVE BRIEF

- Hook
- Slide structure
- Visual direction
- Video direction

COPYWRITING

- Caption
- CTA
- Hashtags
- Script

ASSET

- Design
- Video
- Thumbnail
- Source File
- Final File

ASSIGNMENT

- Planner
- Copywriter
- Designer
- Editor
- Reviewer

ACTIVITY

Timeline seluruh aktivitas content.

15. CONTENT CALENDAR

Tampilan:

MONTH

Perencanaan konten bulanan.

WEEK

Operasional mingguan.

LIST

Tampilan data dengan filter.

Filter:

- Program

- Pillar
 - Platform
 - Format
 - Status
 - PIC
 - Priority
-

16. PRODUCTION BOARD

Kanban:

IDE
|
PLANNED
|
BRIEF
|
PRODUCTION
|
REVIEW
|
REVISION
|
APPROVED
|
SCHEDULED
|
PUBLISHED

Content dapat dipindahkan antar-stage sesuai workflow.

17. REVIEW SYSTEM

Reviewer dapat:

APPROVE

atau

REQUEST REVISION

Reviewer memberikan komentar.

Contoh:

Slide 3 terlalu banyak teks.

Content masuk:

REVISION

Setelah diperbaiki:

RESUBMIT

dan kembali ke Review.

18. PUBLISHED CONTENT

Setelah dipublish, content menyimpan:

- Published Date
- Published Time
- Platform
- Post URL
- Final Caption
- Final Asset

Tersedia tombol:

VIEW POST

19. ANALYTICS

Data performance:

- Reach
- Views
- Likes
- Comments
- Shares
- Saves
- Followers

Sistem menghitung:

Engagement Rate

Kemudian memberikan ranking berdasarkan performance.

20. CONTENT INSIGHT

Sistem dapat menampilkan:

TOP PROGRAM

CPNS

TOP PILLAR

Education

TOP FORMAT

Reels

TOP CONTENT

Content dengan performance terbaik.

BEST POSTING TIME

Waktu dengan performance terbaik berdasarkan data yang tersedia.

21. MONTHLY REPORT

Contoh:

CONTENT REPORT
OCTOBER 2026

Menampilkan:

- Total Content
 - Published
 - CPNS
 - Sekdin
 - Polri
 - Content Mix
 - Top Content
 - Performance
-

22. USER ROLE

ADMIN

Full access.

CONTENT PLANNER

- Idea
- Planning
- Calendar
- Brief
- Assignment

COPYWRITER

- Copy
- Caption
- Script

DESIGNER

- Creative Brief
- Upload Design

VIDEO EDITOR

- Script
- Upload Video

REVIEWER

- Review
- Revision
- Approve

Role akan dikontrol melalui authentication dan authorization.

23. AI ASSISTANT

AI menjadi fitur pengembangan tahap berikutnya.

Fitur:

AI IDEA GENERATOR

Menghasilkan ide konten.

AI HOOK GENERATOR

Menghasilkan variasi hook.

AI CAROUSEL GENERATOR

Menghasilkan struktur carousel.

AI CAPTION GENERATOR

Menghasilkan caption.

AI REELS GENERATOR

Menghasilkan:

- Hook
- Voice Over
- B-roll
- Scene
- CTA

AI bukan bagian wajib dari Core v1.0.

24. NOTIFICATION

Sistem dapat memberikan:

- Task baru
 - Content membutuhkan review
 - Revision request
 - Deadline
 - Jadwal publish
 - Content belum dipublish
-

25. SEARCH

Global search untuk:

- Content ID
- Title
- Program
- Campaign

- PIC
 - Caption
 - Idea
-

26. FILTER

Contoh query:

Semua konten POLRI yang belum publish bulan Oktober.

atau:

Semua konten PROMOTION minggu ini.

atau:

Semua content yang menunggu review.

27. ARSITEKTUR TEKNIS

Prinsip utama

Keep it simple.

Aplikasi menggunakan:

Frontend + Application

Next.js

Language

TypeScript

UI

Tailwind CSS

Backend

Supabase

Database

Supabase PostgreSQL

Authentication

Supabase Auth

Storage

Supabase Storage

Repository

GitHub

Development

Antigravity

Deployment

Vercel

28. ARSITEKTUR APLIKASI


Kita menggunakan:


Monolithic Next.js App + Supabase

Bukan:

Next.js
+
Express
+
Render
+
Supabase

melainkan:



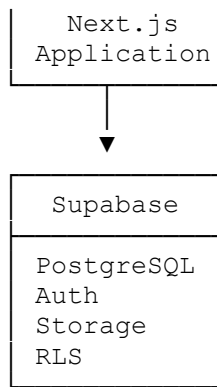


Tidak perlu server backend terpisah kecuali nanti memang dibutuhkan.

29. STRUKTUR FILE

Struktur dibuat sesederhana mungkin:

```
prima-rib-content-plan/
├── app/
│   ├── login/
│   │   └── page.tsx
│   ├── dashboard/
│   │   └── page.tsx
│   ├── content/
│   │   ├── page.tsx
│   │   ├── new/
│   │   │   └── page.tsx
│   │   └── [id]/
│   │       └── page.tsx
│   ├── ideas/
│   │   └── page.tsx
│   ├── calendar/
│   │   └── page.tsx
│   ├── production/
│   │   └── page.tsx
│   ├── review/
│   │   └── page.tsx
│   ├── published/
│   │   └── page.tsx
│   ├── analytics/
│   │   └── page.tsx
│   └── reports/
│       └── page.tsx
```

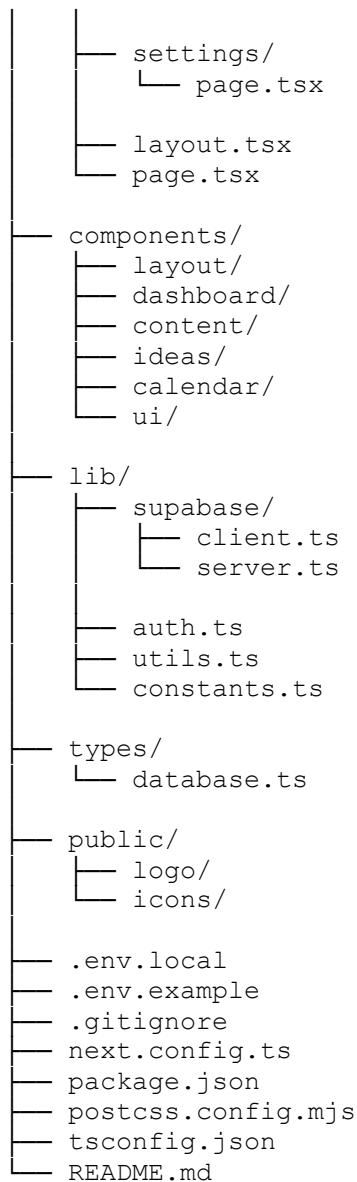

30. ATURAN ARSITEKTUR

Antigravity harus mengikuti prinsip:

1. Gunakan **Next.js App Router**.
2. Gunakan **TypeScript**.
3. Gunakan **Tailwind CSS**.
4. Gunakan **Supabase**.
5. Deployment ke **Vercel**.
6. Satu repository untuk satu aplikasi.
7. Jangan membuat Express backend terpisah.
8. Jangan menggunakan Docker kecuali benar-benar diperlukan.
9. Jangan menambahkan library yang tidak diperlukan.
10. Hindari over-engineering.
11. Gunakan reusable component hanya jika memang berguna.

12. Jangan expose `service_role` key ke client.
 13. Gunakan environment variables.
 14. Database access menggunakan Supabase.
 15. Authentication menggunakan Supabase Auth.
 16. Authorization menggunakan role + RLS.
 17. Pertahankan struktur existing ketika melakukan perubahan.
 18. Jangan mengubah fitur yang tidak berkaitan dengan task.
 19. Prioritaskan solusi sederhana dan mudah dipelihara.
 20. Semua fitur harus mempertimbangkan responsive design.
-

31. SUPABASE

Supabase menjadi pusat backend.

Komponen:

PostgreSQL

Database aplikasi.

Auth

Login dan session.

Storage

Asset:

- Foto
- Video
- Design
- Thumbnail
- Source file

RLS

Mengatur siapa yang boleh:

- Read
 - Insert
 - Update
 - Delete
-

32. DATABASE CORE

Entitas utama:

USERS
PROGRAMS
CONTENT_PILLARS
CONTENT_FORMATS
PLATFORMS
CAMPAIGNS

IDEAS

CONTENTS
CONTENT_PLATFORMS
CONTENT_ASSETS
CONTENT_ASSIGNMENTS
CONTENT_REVIEWS
CONTENT_ANALYTICS
CONTENT_ACTIVITY

Relasi detail akan ditentukan pada tahap **Database Design / ERD**.

33. SECURITY

Prinsip keamanan:

Frontend

Hanya menggunakan public Supabase credentials yang memang aman untuk client.

Server

Secret key hanya di server/environment variable.

Database

Semua tabel sensitif menggunakan:

Row Level Security

Authentication


User harus login untuk mengakses aplikasi.

Authorization

Hak akses berdasarkan Role.

34. DEPLOYMENT

Workflow:

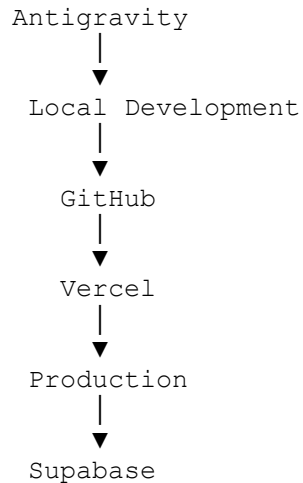

Setiap perubahan yang di-push ke GitHub dapat memicu deployment otomatis melalui Vercel.

35. ENVIRONMENT VARIABLES

Minimal:

```
NEXT_PUBLIC_SUPABASE_URL  
NEXT_PUBLIC_SUPABASE_ANON_KEY
```

Secret tambahan hanya jika benar-benar diperlukan.

Tidak boleh:

```
SUPABASE_SERVICE_ROLE_KEY
```

dimasukkan ke frontend atau di-commit ke GitHub.

36. DEVELOPMENT ROADMAP

PHASE 0 — FOUNDATION

- Project setup

- Next.js
 - TypeScript
 - Tailwind
 - Supabase connection
 - GitHub
 - Vercel
 - Authentication
-

PHASE 1 — CORE

- Dashboard
 - Content
 - Idea Bank
 - Calendar
 - Content Detail
 - Workflow
 - Assignment
 - Review
 - Published
-

PHASE 2 — TEAM

- User Management
 - Role
 - Notification
 - Activity Log
 - Kanban Production Board
-

PHASE 3 — ASSET

- Creative Brief
 - File Upload
 - Asset Management
 - Final Asset
 - Source File
-

PHASE 4 — ANALYTICS

- Content Performance
- Ranking

- Content Mix
 - Monthly Report
 - Content Insight
-

PHASE 5 — AI

- AI Idea Generator
 - AI Hook Generator
 - AI Caption Generator
 - AI Carousel Generator
 - AI Reels Generator
 - AI Recommendation
-

37. DESIGN DIRECTION

Identitas visual:

Primary Navy

#284078

Secondary Yellow

#DDB02E

White

#FFFFFF

Karakter UI:

- Modern
- Clean
- Profesional
- Responsive
- Cepat
- Tidak terlalu ramai
- Mudah digunakan tim

Desktop menjadi environment utama untuk content management, tetapi seluruh halaman harus tetap nyaman digunakan melalui mobile.

38. PRINSIP PENGEMBANGAN

Ini menjadi aturan penting selama development:

Jangan membuat sistem lebih kompleks daripada kebutuhan bisnisnya.

Kita prioritaskan:

Simple → Stable → Usable → Scalable

bukan:

Complex → Over-engineered → Sulit maintenance

39. ROADMAP DOKUMEN SEBELUM CODING

Setelah Masterplan v1.1 ini disepakati, kita **belum langsung coding**.

Urutannya:

```
MASTERPLAN v1.1
  ↓
PRD
  ↓
USER FLOW
  ↓
SITEMAP
  ↓
DATABASE / ERD
  ↓
RLS & AUTH
  ↓
UI/UX SPECIFICATION
  ↓
ANTIGRAVITY MASTER PROMPT
  ↓
BUILD
  ↓
TESTING
  ↓
GITHUB
  ↓
VERCEL
```

PRD — PRIMA RIB CONTENT PLAN

Product Requirements Document — Version 1.0

Status: Draft

Tahap: Pre-Development

Stack: Next.js + TypeScript + Tailwind + Supabase + Vercel

Development: Antigravity

01. PRODUCT OVERVIEW

Prima RIB Content Plan adalah aplikasi internal untuk mengelola seluruh siklus produksi konten Prima RIB.

Aplikasi menjadi pusat kerja tim:

Idea → Planning → Production → Review → Approval → Scheduling → Publishing → Evaluation

Sistem harus memudahkan tim mengetahui:

- Apa yang harus dibuat?
- Siapa yang mengerjakan?
- Kapan deadline-nya?
- Sudah sampai tahap mana?
- Apa yang perlu direvisi?
- Kapan dipublish?
- Bagaimana performanya?

02. TARGET USER

Aplikasi memiliki 5 role utama.

Role	Fokus
Admin	Mengelola seluruh sistem
Content Planner	Merencanakan dan mengelola konten
Copywriter	Membuat copy/caption/script
Designer	Membuat asset visual
Video Editor	Membuat asset video
Reviewer	Memeriksa dan approve konten

Satu user **boleh memiliki lebih dari satu kemampuan/role** jika nanti diperlukan.

Contoh:

Idam

→ Admin + Content Planner

03. ACCESS CONTROL

ADMIN

Bisa mengakses seluruh modul.

CONTENT PLANNER

Bisa:

- Dashboard
- Content
- Idea Bank
- Calendar
- Production
- Review
- Published
- Analytics

COPYWRITER

Fokus pada:

- Content yang ditugaskan
- Copywriting
- Caption
- Script

DESIGNER

Fokus pada:

- Content yang ditugaskan
- Creative Brief
- Upload Design
- Revision

VIDEO EDITOR

Fokus pada:

- Content yang ditugaskan
- Script
- Video Brief
- Upload Video
- Revision

REVIEWER

Fokus pada:

- Content Review
- Revision
- Approval

04. AUTHENTICATION

Halaman:

/login

Field:

- Email
- Password

Button:

Login

Authentication menggunakan **Supabase Auth**.

Setelah login:

Admin
→ Dashboard

User lainnya
→ Dashboard

Jika belum login dan mencoba membuka halaman internal:

/private-page
↓
Login

05. GLOBAL LAYOUT

Setelah login, aplikasi menggunakan layout utama:

Logo	Search	Notification	Avatar	
Dashboard Content Idea Bank Calendar Production Review Published Analytics Reports Settings	MAIN CONTENT			

Desktop

Sidebar permanen.

Mobile

Sidebar menjadi:

Hamburger Menu / Drawer

06. DASHBOARD

Route:

/dashboard

Dashboard menampilkan ringkasan kondisi content.

KPI

Minimal:

Total Content

This Month

In Production

Waiting Review

Scheduled

Published

CONTENT PIPELINE

Menampilkan jumlah:

IDE
PLANNED
BRIEF
PRODUCTION
REVIEW
REVISION
APPROVED
SCHEDULED
PUBLISHED

Setiap status dapat diklik untuk melihat content terkait.

UPCOMING CONTENT

Menampilkan konten yang akan dipublish.

Contoh:

07 OCT 2026
19:00

5 Kesalahan Peserta Saat Mengerjakan TIU

CPNS
Carousel
Scheduled

Button:

View Content

RECENT ACTIVITY

Contoh:

Designer mengupload asset.

Reviewer meminta revisi.

Content PR-2026-0024 approved.

07. CONTENT

Route:

/content

Ini merupakan database seluruh content.

HEADER

Content

[+ New Content]

Search...

Filter...

FILTER

User dapat filter:

- Status
 - Program
 - Pillar
 - Format
 - Platform
 - Priority
 - PIC
 - Date
-

VIEW

Minimal dua mode:

LIST

Tabel content.

KANBAN

Berdasarkan status workflow.

08. CONTENT LIST

Kolom:

Field

Content ID

Title

Program

Pillar

Format

Platform

PIC

Publish Date

Status

Priority

Klik row:

→ Content Detail.

09. CREATE CONTENT

Route:

/content/new

Button:

+ **New Content**

Form:

BASIC INFORMATION

- Title
- Program
- Content Pillar

- Format
- Platform
- Campaign

PLANNING

- Objective
- Target Audience
- Angle
- Priority
- Publish Date
- Publish Time

ASSIGNMENT

- Planner
- Copywriter
- Designer
- Video Editor
- Reviewer

Button:

Save as Draft

Setelah dibuat:

Status = PLANNED

10. CONTENT DETAIL

Route:

/content/[id]

Halaman ini menjadi pusat informasi satu content.

HEADER

Menampilkan:

PR-2026-0042

5 Kesalahan Peserta Saat Mengerjakan TIU

[CPNS]
[EDUCATION]
[CAROUSEL]

STATUS: PRODUCTION

Action:

- Edit
- Change Status
- Assign
- Duplicate
- Archive

11. CONTENT DETAIL — PLANNING

Informasi:

- Objective
- Target Audience
- Angle
- Priority
- Publish Date
- Publish Time
- Platform
- Campaign

12. CONTENT DETAIL — CREATIVE BRIEF

Bagian untuk memberikan arahan produksi.

Contoh:

HOOK

“Kenapa skor TIU kamu nggak naik-naik?”

CONTENT STRUCTURE

Slide 1

Hook

Slide 2

Problem

Slide 3

Kesalahan #1

Slide 4

Kesalahan #2

Slide 5

Solution

Slide 6

CTA

13. CONTENT DETAIL — COPYWRITING

Field:

Hook

Main Copy

Caption

CTA

Hashtag

Script

Copywriter dapat mengedit bagian ini jika content ditugaskan kepadanya.

14. CONTENT DETAIL — ASSET

Asset dapat berupa:

- Image
- Video
- Thumbnail

- Source file
- Final file

Button:

Upload Asset

Asset disimpan di:

Supabase Storage

15. CONTENT DETAIL — ASSIGNMENT

Menampilkan:

Planner
Copywriter
Designer
Video Editor
Reviewer

Setiap assignment memiliki:

- User
- Task
- Status
- Deadline

Contoh:

Designer
Task: Carousel Design
Deadline: 6 Oct 2026

16. IDEA BANK

Route:

/ideas

Header:

Idea Bank

Button:

+ New Idea

IDEA CARD

Contoh:

Kenapa peserta sering kehabisan waktu saat TIU?

CPNS
Education
HIGH

[Convert to Content]

CREATE IDEA

Field:

- Idea Title
- Description
- Program
- Pillar
- Priority
- Source

Button:

Save Idea

Default:

Status = NEW

17. CONVERT IDEA TO CONTENT

Button:

Convert to Content

Sistem:

1. Membuat Content baru.
2. Menyalin informasi dari Idea.
3. Menghubungkan Content dengan Idea.

4. Mengubah status Idea menjadi:

PLANNED

User kemudian melengkapi Content Detail.

18. CONTENT CALENDAR

Route:

/calendar

View:

MONTH

Kalender bulanan.

WEEK

Kalender mingguan.

LIST

Daftar jadwal.

CALENDAR EVENT

Setiap event menampilkan:

- Time
- Title
- Program
- Format
- Status

Klik event:

→ Content Detail.

19. PRODUCTION BOARD

Route:

/production

Kanban:

PLANNED
BRIEF
PRODUCTION
REVIEW
REVISION
APPROVED
SCHEDULED
PUBLISHED

Card menampilkan:

- Content ID
- Title
- Program
- Priority
- PIC
- Deadline

20. DRAG & DROP

Jika menggunakan Kanban, drag & drop dapat digunakan untuk mengubah status.

Contoh:

PRODUCTION
↓
REVIEW

Sistem mengubah:

```
content.status = REVIEW
```

dan mencatat aktivitas:

Content moved from Production to Review.

Catatan: perpindahan status harus tetap mengikuti aturan workflow. User tidak boleh sembarangan melompati tahapan jika role-nya tidak memiliki izin.

21. REVIEW

Route:

/review

Menampilkan content yang:

REVIEW
REVISION

Reviewer membuka content.

Pilihan:

APPROVE

Status:

APPROVED

REQUEST REVISION

Status:

REVISION

Wajib mengisi:

Revision Comment

Contoh:

“Slide 2 perlu dibuat lebih singkat.”

22. RESUBMIT

Setelah revisi selesai:

Button:

Submit for Review

Status:

REVISION
→ REVIEW

Reviewer kembali menerima content.

23. SCHEDULED

Content yang sudah approved dapat dijadwalkan.

Informasi:

- Publish Date
- Publish Time
- Platform

Status:

APPROVED
→ SCHEDULED

24. PUBLISHED

Route:

/published

Menampilkan content yang sudah dipublish.

Data:

- Title
- Program
- Platform
- Published Date
- Published Time
- Post URL
- Performance

Button:

View Post

25. MARK AS PUBLISHED

Setelah benar-benar publish:

Button:

Mark as Published

Sistem meminta:

- Published Date
- Published Time
- Post URL

Kemudian:

SCHEDULED
→ PUBLISHED

26. ANALYTICS

Route:

/analytics

Filter:

- Date
- Program
- Pillar
- Format
- Platform

KPI:

- Total Views
 - Total Reach
 - Total Engagement
 - Average Engagement Rate
 - Total Content
-

27. CONTENT PERFORMANCE

Setiap published content dapat diberikan:

Views
Reach
Likes
Comments
Shares
Saves
Followers

Sistem menghitung:

Engagement Rate

Data dapat dimasukkan manual pada tahap awal.

Integrasi API social media **belum menjadi bagian Core v1.0.**

28. REPORTS

Route:

`/reports`

User dapat melihat:

Monthly Report

- Total content
- Published
- Program distribution
- Pillar distribution
- Format distribution
- Platform distribution
- Top content
- Performance

Nantinya dapat dikembangkan menjadi:

Export PDF / Excel

tetapi bukan kebutuhan Core v1.0.

29. SETTINGS

Route:

`/settings`

Submenu:

Users

Mengelola user.

Programs

CPNS / Sekdin / Polri / General.

Content Pillars

Education / Engagement / Motivation / dll.

Formats

Carousel / Reels / dll.

Platforms

Instagram / TikTok / dll.

Campaigns

Untuk campaign tertentu.

30. USER MANAGEMENT

Hanya Admin.

Data:

- Name
- Email
- Role
- Status
- Created Date

Action:

- Add User
 - Edit User
 - Disable User
-

31. ACTIVITY LOG

Setiap perubahan penting dicatat.

Contoh:

04 Oct 2026 – 10:30
Idam created PR-2026-0042

04 Oct 2026 – 11:15
Andi assigned as Designer

05 Oct 2026 – 09:20
Andi uploaded design

05 Oct 2026 – 14:00
Budi requested revision

05 Oct 2026 – 16:00
Andi resubmitted content

Ini penting untuk accountability.

32. NOTIFICATION

Versi awal dapat menggunakan **in-app notification**.

Contoh:



PR-2026-0042 membutuhkan review.

Kamu mendapat assignment baru.

Revision requested pada content PR-2026-0039.

Content dijadwalkan publish hari ini.

Email/push notification bisa menjadi pengembangan berikutnya.

33. CONTENT DUPLICATION

Button:

Duplicate Content

Digunakan ketika konsep serupa ingin digunakan kembali.

Contoh:

5 Kesalahan TIU

↓ Duplicate

5 Kesalahan TKP

Data tertentu disalin:

- Structure
- Brief
- Caption template
- Pillar
- Format

Tetapi:

- ID baru
- Status baru
- Publish date baru

34. ARCHIVE

Content/Idea yang tidak digunakan tidak langsung dihapus.

Gunakan:

Archive

Tujuannya menjaga historical data.

Delete permanen hanya tersedia untuk Admin jika memang diperlukan.

35. SEARCH & FILTER

Search global harus bisa menemukan:

- Content ID
- Title
- Idea
- Program
- Campaign
- User/PIC

Filter dapat dikombinasikan.

Contoh:

```
Program = CPNS  
+  
Pillar = Promotion  
+  
Status = Scheduled
```

36. RESPONSIVE REQUIREMENT

Desktop

Fokus utama untuk:

- Planning
- Calendar
- Kanban
- Analytics
- Reports

Mobile

Fokus:

- View content
- Update status
- Review
- Upload asset
- Notification
- Quick edit

Tidak semua fungsi harus memiliki UX identik di mobile, tetapi semuanya harus tetap usable.

37. NON-FUNCTIONAL REQUIREMENTS

Aplikasi harus:

- Cepat dibuka.
- Responsive.
- Tidak bergantung pada server custom.
- Aman.
- Mudah di-maintain.
- Mudah dideploy.
- Mudah dikembangkan.
- Memiliki struktur kode sederhana.

Target arsitektur:

Next.js → Vercel → Supabase

38. MVP / CORE v1.0

Supaya proyek tidak melebar, **MVP kita batasi pada:**

WAJIB

- Login
- Dashboard
- User Role
- Content
- Create Content
- Content Detail
- Idea Bank
- Convert Idea
- Calendar
- Production Board
- Assignment
- Review
- Revision
- Approval
- Schedule
- Published
- Basic Activity Log
- Basic Settings

BELUM WAJIB


- AI
- Social Media API
- Automated posting
- Advanced analytics
- Email notification
- Push notification
- PDF report
- Excel report

USER FLOW + SITEMAP — Prima RIB Content Plan v1.0

Dokumen ini menjadi penghubung antara **PRD** dan rancangan **Database/ERD**. Saya buat dengan prinsip yang sama: **simple, jelas, tidak over-engineering, dan realistis untuk Next.js + Supabase + Vercel**.

1. Gambaran Besar Aplikasi

Alur utama aplikasi:

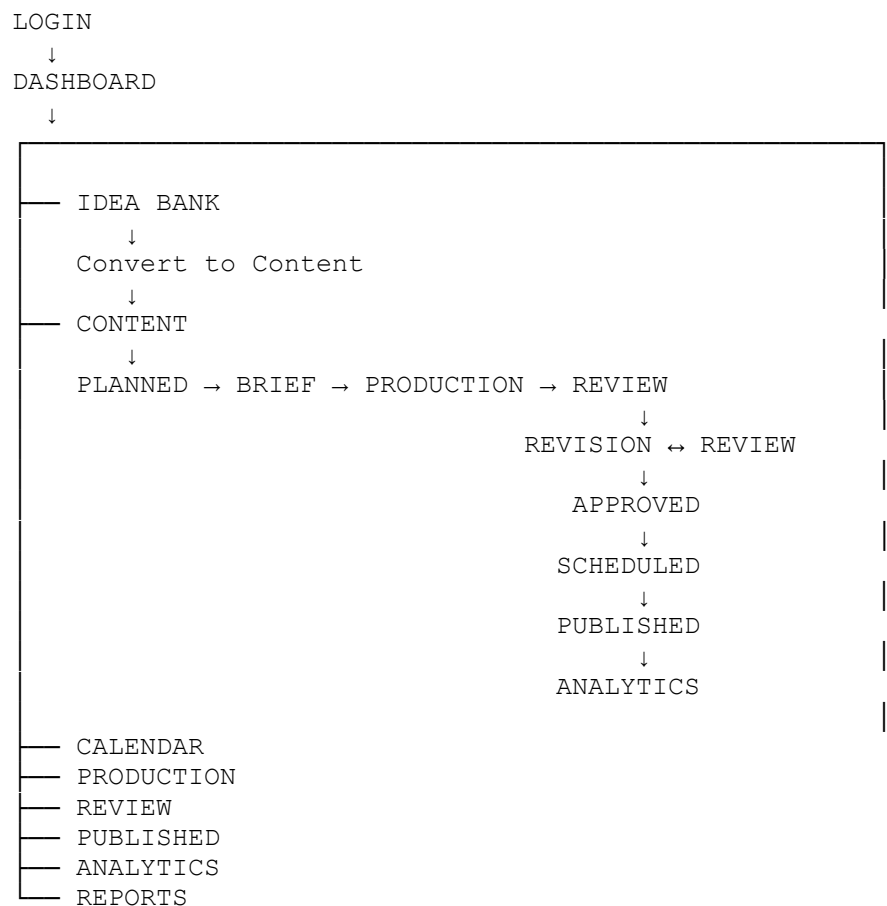


Jadi pusat aplikasi tetap **Content**.

Menu lain pada dasarnya membantu mengelola tahapan-tahapan content tersebut.

2. Sitemap

Struktur halaman utama:

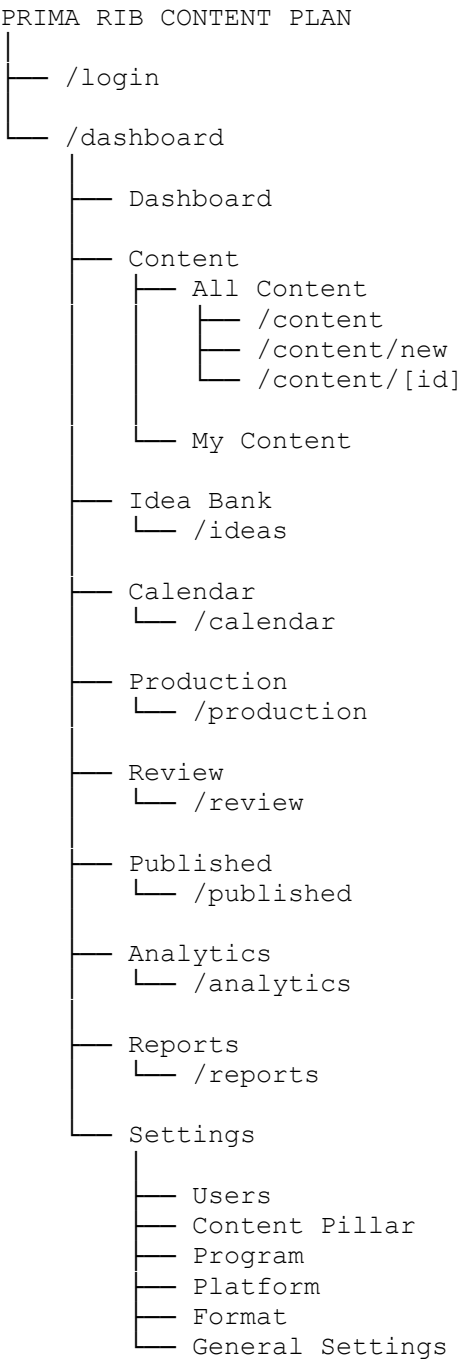

3. Global Navigation

Sidebar desktop:

PRIMA RIB CONTENT PLAN

	Dashboard
	Content
	All Content
	My Content
	Calendar
	Idea Bank
	Production
	Review
	Published
	Analytics
	Reports
	Settings
User Profile	
Logout	

Mobile:

Header



Content Area



Bottom Navigation / Mobile Menu

Tidak perlu membuat navigasi mobile yang terlalu kompleks.

4. Authentication Flow

Login

/open app



Apakah sudah login?

— YA



/dashboard


— TIDAK




/login



Email + Password

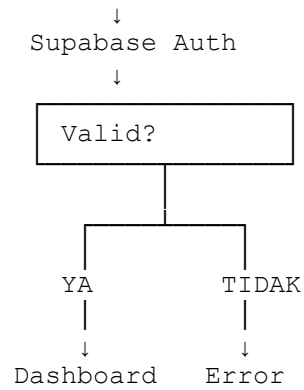


Logout:



5. Dashboard Flow


Dashboard bukan tempat membuat semua aktivitas.

Dashboard berfungsi sebagai **control center**.

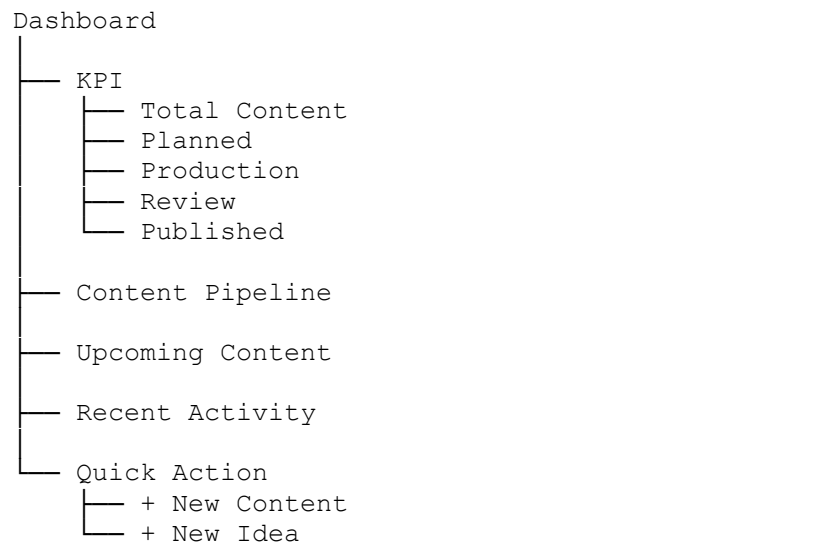

Contoh:

DASHBOARD		
TOTAL 128	PLANNED 24	REVIEW 8

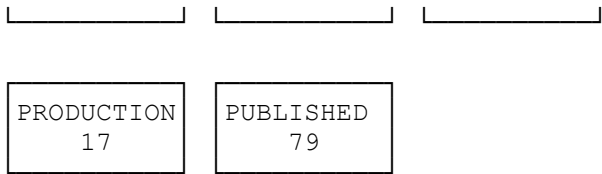

CONTENT PIPELINE

Planned → Brief → Production → Review
24 12 17 8

UPCOMING CONTENT

04 Oct | Tips SKD CPNS | Reels
05 Oct | Bintara Polri | Carousel
06 Oct | Sekdin | TikTok

6. Idea Bank Flow

Idea Bank adalah **tempat penampungan ide sebelum menjadi content plan resmi.**

```
graph TD; A[Idea Bank] --> B[+ New Idea]; B --> C[Isi:]; C --> D["- Judul<br/>- Deskripsi<br/>- Program<br/>- Pillar<br/>- Source<br/>- Priority"]; D --> E[SAVE]; E --> F[STATUS: NEW];
```

Kemudian:

```
graph TD; A[Idea] --> B[Dipilih]; B --> C[SELECTED]; C --> D[Convert to Content]; D --> E[Create Content]; E --> F[Idea = PLANNED]; F --> G[Content = PLANNED];
```

Flow Convert

[Idea Detail]

Judul
Program
Pillar
Deskripsi

[Convert to Content]

↓

Create Content Form

↓

Data idea otomatis masuk

↓

SAVE

↓

Idea Status = PLANNED
Content Status = PLANNED

Catatan penting: convert tidak menghapus idea.

Idea tetap tersimpan sebagai sumber historis.

7. Create Content Flow

Ada dua pintu masuk:

A. Dari Dashboard

Dashboard
↓
+ New Content
↓
Create Form

B. Dari Idea Bank

Idea
↓
Convert
↓
Create Content

Form:

CONTENT INFORMATION

Title
Short Title

Program
Pillar
Format
Platform

Campaign
Priority

Target Audience
Objective
Angle

Publish Date
Publish Time

Lalu:

CREATIVE

Hook
Main Content
CTA
Caption
Hashtag
Script
Creative Brief

Kemudian:

ASSIGNMENT

Planner
Copywriter
Designer
Video Editor
Reviewer

Save:

SAVE DRAFT

↓
Content Status = PLANNED

8. Content Detail Flow

Ini salah satu halaman **paling penting** di aplikasi.

/content/[id]

Struktur:

CONTENT HEADER		
PR-2026-0001		
Tips Lolos SKD CPNS		
[PLANNED] [CPNS] [EDUCATION]		
Edit	Duplicate	Archive

Planning

Program
Pillar
Format
Platform
Campaign
Target
Objective
Angle
Priority
Publish Schedule

Creative Brief

Hook
Main Content
CTA
Creative Direction

Copywriting

Caption
Hashtag

Script

Video Script

Assets

Design
Video
Thumbnail
Other

Assignments


Planner
Copywriter
Designer
Video Editor
Reviewer

Activity


Timeline

9. Workflow Flow

Ini adalah jantung aplikasi.



Dengan kemungkinan:

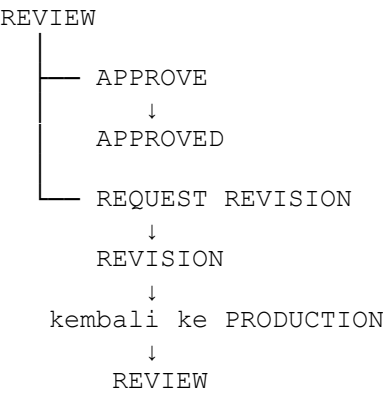

Jadi tidak ada alur:

REVIEW → PUBLISHED

tanpa approval.

10. Production Flow

Production Board:

PLANNED	BRIEF	PRODUCTION	REVIEW
Content1 Content2 Content3	Content4 Content5 Content6	Content7 Content8	Content9 Content10

Card:

PR-2026-0021

Tips SKD CPNS
Reels

CPNS
Education



Andi



06 Oct

[Production]

Drag & drop hanya boleh mengikuti workflow yang valid.

11. Review Flow

Reviewer masuk ke:

Review

Kemudian:

Review List



Open Content



Check:

- Brief
- Copy
- Design
- Video
- Caption
- CTA



Decision

Ada dua tombol:

[REQUEST REVISION] [APPROVE]

Request Revision

Wajib mengisi:

Revision Comment

"Hook kurang kuat.
Slide 3 perlu diperbaiki.
CTA belum jelas."

Kemudian:

REVIEW
↓
REVISION
↓
PIC memperbaiki
↓
SUBMIT FOR REVIEW
↓
REVIEW

Approve

REVIEW
↓
APPROVE
↓
APPROVED

12. Scheduling Flow

Setelah approval:

APPROVED
↓
Set Publish Date
Set Publish Time
↓
SCHEDULED

Calendar otomatis mengambil data tersebut.

13. Published Flow

Ketika konten benar-benar diposting:

SCHEDULED
↓
Content Published
↓
Mark as Published

Form:

Published Date
Published Time

Platform

Post URL

Kemudian:

PUBLISHED

Content masuk ke halaman Published.

14. Analytics Flow

Analytics **tidak otomatis mengambil data dari Instagram/TikTok pada versi pertama.**

Data diinput manual.

PUBLISHED



Open Content



Analytics



Input:

Views

Reach

Likes

Comments

Shares

Saves

Followers



Save

Kemudian sistem menghitung:

Engagement Rate

berdasarkan formula yang nanti kita tetapkan di database/business logic.

15. Calendar Flow

Calendar mengambil data dari Content.

Content



Publish Date



Calendar

View:

MONTH
WEEK
LIST

Filter:

Program
Pillar
Platform
Format
Status
PIC
Priority

Contoh:

OCTOBER 2026

MON	TUE	WED	THU	FRI
		1	2	3
5	6	7	8	9
CPNS	POLRI	SEKDIN		
12	13	14	15	16

Klik content:

Calendar Card
↓
Content Detail

16. Published Flow

Halaman:

Published

Berisi:

Content
Program
Platform
Published Date
Post URL
Performance

Action:

View Content
View Post
View Analytics

17. Reports Flow

Reports merupakan **ringkasan**, bukan pengganti Analytics.

Reports
↓
Select Month
↓
Generate Report

Contoh:

OCTOBER 2026 REPORT

Total Content	42
Published	35
In Production	4
In Review	3

PROGRAM MIX

CPNS	18
POLRI	10
SEKDIN	7

TOP CONTENT

1. Tips SKD...
2. Bintara...
3. Info Sekdin...

Untuk MVP, cukup **tampilan report di aplikasi**.

Export PDF/Excel tetap di luar MVP.

18. Settings Flow

Settings hanya dapat diakses sesuai permission.

Settings

- Users
- Programs
- Content Pillars
- Formats
- Platforms
- General Settings

Users

Admin dapat:

Create User
Edit User
Deactivate User
Assign Role

Satu user dapat memiliki lebih dari satu role bila dibutuhkan.

19. Role-Based User Flow

Admin

LOGIN
↓
DASHBOARD
↓
ALL MODULES
↓
SETTINGS
↓
USERS

Full access.

Content Planner

LOGIN
↓
DASHBOARD
↓
IDEA BANK
↓
CONTENT
↓
CALENDAR
↓
ASSIGNMENT

Fokus pada planning.

Copywriter

LOGIN

↓
MY CONTENT
↓
CONTENT DETAIL
↓
COPYWRITING
↓
SUBMIT

Designer

LOGIN
↓
MY CONTENT
↓
CONTENT DETAIL
↓
CREATIVE BRIEF
↓
UPLOAD DESIGN
↓
SUBMIT

Video Editor

LOGIN
↓
MY CONTENT
↓
CONTENT DETAIL
↓
SCRIPT
↓
UPLOAD VIDEO
↓
SUBMIT

Reviewer

LOGIN
↓
REVIEW
↓
CONTENT
↓
APPROVE / REVISION

20. My Content


Saya menyarankan **My Content** tidak dibuat sebagai database/module terpisah.

Ini hanya filter dari Content.

Misalnya:

```
/content?assigned_to=me
```

Jadi:

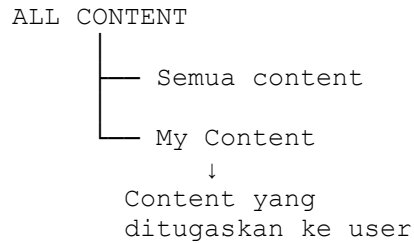

Ini jauh lebih sederhana untuk aplikasi.

21. Status Definition

Kita perlu mengunci status agar nanti database tidak berantakan.

DRAFT
PLANNED
BRIEF
PRODUCTION
REVIEW
REVISION
APPROVED
SCHEDULED
PUBLISHED
ARCHIVED

Namun untuk workflow utama:

PLANNED
↓
BRIEF
↓
PRODUCTION
↓
REVIEW
↓
APPROVED
↓
SCHEDULED
↓
PUBLISHED

REVISION adalah status balik dari Review.

ARCHIVED adalah status khusus untuk content yang sudah tidak aktif.

22. Global Search Flow

Search tersedia dari layout utama.

```
Search
↓
"SKD CPNS"
↓
Search:
- Content
- Ideas
- Campaign
```

Hasil:

```
CONTENT
PR-2026-0012
Tips SKD CPNS
```

```
IDEAS
Cara Cepat...
```

```
CAMPAIGN
SKD CPNS 2026
```

Untuk MVP, search bisa difokuskan dulu pada **Content + Ideas**.

23. Activity Timeline

Setiap aksi penting menghasilkan activity.

Contoh:

04 Oct 2026 — 09:30

Andi created content
"Tips Lolos SKD CPNS"

09:42
Budi updated creative brief

10:15
Citra uploaded design

11:02
Doni requested revision

13:10
Citra resubmitted content

14:00
Doni approved content

Ini sangat berguna untuk mengetahui **siapa melakukan apa** tanpa perlu sistem audit yang terlalu rumit.

24. Error / Empty State

Setiap halaman harus memiliki kondisi:

Loading

Loading...

Empty

Belum ada content.

[+ New Content]

Error

Terjadi kesalahan.

[Coba Lagi]

Unauthorized

Anda tidak memiliki akses
ke halaman ini.

25. Mobile Flow

Karena aplikasi kemungkinan besar juga akan digunakan lewat laptop/tablet/HP, semua halaman harus responsive.

Contoh Content:

Desktop:

```
Sidebar | Filters
         | Content Table
         | Content Table
```

Mobile:

Header

Filters
Content Card
Content Card
Content Card

Production:

Desktop:

Planned | Brief | Production | Review

Mobile:

[Planned ▼]

Content 1
Content 2
Content 3

Tidak memaksakan Kanban 4 kolom di layar kecil.

26. Complete User Journey

Sekarang kita gabungkan semuanya.

Skenario nyata Prima RIB

Misalnya tim menemukan ide:

"5 Kesalahan yang Sering Dilakukan Peserta SKD"

Flow:

```
IDEA BANK
↓
Create Idea
↓
"5 Kesalahan yang Sering..."
↓
Program = CPNS
Pillar = Education
Priority = High
↓
SAVE
↓
SELECTED
↓
Convert to Content
↓
PR-2026-0025
↓
PLANNED
```

↓
Planner membuat brief
↓
BRIEF
↓
Assign:
Copywriter
Designer
↓
PRODUCTION
↓
Copywriter membuat:
Hook
Caption
CTA
↓
Designer membuat:
Carousel
↓
Semua selesai
↓
REVIEW
↓
Reviewer mengecek
↓
REQUEST REVISION
↓
REVISION
↓
Designer memperbaiki
↓
SUBMIT FOR REVIEW
↓
REVIEW
↓
APPROVED
↓
Set:
06 Oct 2026
19:00
↓
SCHEDULED
↓
Posting dilakukan
↓
MARK AS PUBLISHED
↓
PUBLISHED
↓
Masukkan analytics
↓
EVALUATED

Nah, ini sebenarnya adalah inti dari aplikasi Prima RIB Content Plan.

27. Sitemap Final yang Akan Menjadi Acuan Coding

Saya sarankan kita **kunci sitemap ini**:



Dengan struktur ini, kita **tidak perlu membuat puluhan route**.

28. Keputusan Arsitektur yang Saya Kunci

Ada beberapa hal yang sengaja saya sederhanakan:

Bagian	Keputusan
My Content	Filter dari Content
Calendar	View dari Content
Production	View/filter Content berdasarkan workflow
Review	View/filter Content status REVIEW
Published	View/filter Content status PUBLISHED

Bagian	Keputusan
Analytics	Data terkait Content
Reports	Query/agregasi data
Activity	Satu activity log
Idea → Content	Relasi langsung
Assignment	Satu tabel assignment
Roles	Role-based access
Workflow	Status pada Content
Backend	Supabase
Frontend	Next.js
Deploy	Vercel

Dengan begitu kita **tidak membuat tabel atau module yang sebenarnya hanya merupakan "view" dari data Content.**

DATABASE / ERD + SUPABASE SCHEMA — Prima RIB Content Plan v1.0

Saya sudah menyusun ini berdasarkan **Masterplan + PRD + User Flow/Sitemap** yang tadi kita kunci.

Ada satu prinsip utama yang saya pakai:


Jangan membuat tabel hanya karena ada menu. Buat tabel berdasarkan data yang memang perlu disimpan.

Jadi `Calendar`, `Production`, `Review`, dan `Published` **tidak punya tabel sendiri**. Semuanya membaca data dari `contents` dan tabel pendukungnya.

1. Arsitektur Database

Database utama:


SUPABASE

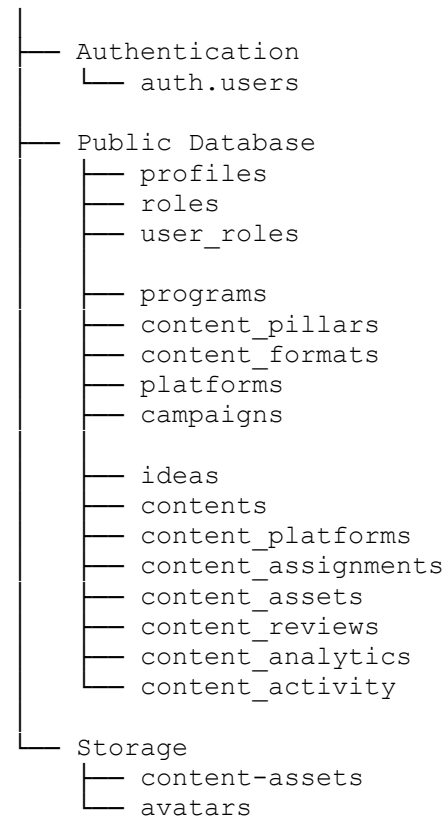

Total tabel aplikasi yang kita perlukan: **14 tabel**.

2. ERD Utama

Secara sederhana hubungannya datanya:

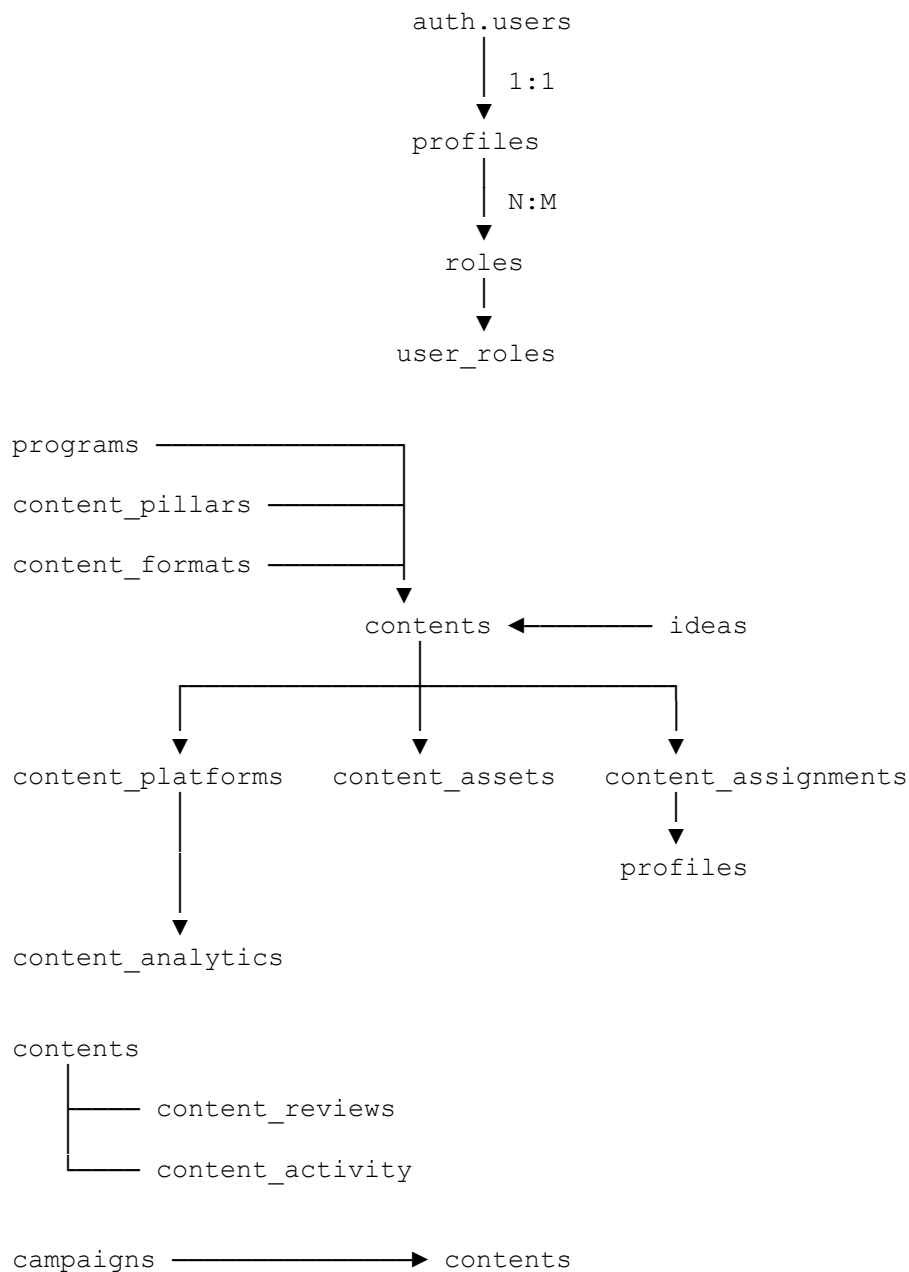

3. Tabel Authentication

auth.users

Ini **bukan** tabel yang kita buat sendiri.

Supabase Auth sudah menyediakan:

auth.users

Berisi:

```
id
email
encrypted_password
created_at
last_sign_in_at
...
```

Kita tidak perlu membuat tabel password sendiri.

Password sepenuhnya ditangani Supabase Auth.

4. profiles

Menyimpan informasi user aplikasi.

profiles

id	UUID PK
full_name	TEXT
avatar_url	TEXT
is_active	BOOLEAN
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

Relasi:

```
profiles.id
  ↓
auth.users.id
```

Jadi:

```
auth.users
  1
  |
  1
profiles
```

Tidak perlu menyimpan:

```
password
password_hash
```

di sini.

5. roles

Daftar role aplikasi.

roles

id	UUID PK
name	TEXT UNIQUE
description	TEXT
created_at	TIMESTAMPTZ

Data awal:

Admin
Content Planner
Copywriter
Designer
Video Editor
Reviewer

6. user_roles

Karena satu orang **boleh mempunyai lebih dari satu role**, kita jangan menyimpan satu `role` langsung di `profiles`.

Contoh:

Andi
├─ Content Planner
└─ Copywriter

Maka:

user_roles

user_id	UUID FK
role_id	UUID FK
created_at	TIMESTAMPTZ

PRIMARY KEY (user_id, role_id)

Relasi:

profiles
|
N:M
▼
roles

Ini lebih fleksibel tetapi tetap sederhana.

7. programs

Program utama Prima RIB.

programs

id	UUID PK
name	TEXT
code	TEXT UNIQUE
description	TEXT
is_active	BOOLEAN
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

Seed awal:

CPNS
SEKDIN
POLRI
GENERAL

Program bisa dikembangkan dengan data tambahan.

Contoh:

CPNS

- SKD
- TWK
- TIU
- TKP
- CAT
- Tryout

Untuk tahap awal saya tidak membuat tabel `program_subcategories`.

Karena belum diperlukan.

8. content_pillars

content_pillars

id	UUID PK
name	TEXT
description	TEXT
is_active	BOOLEAN
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

Seed:

Education

Engagement
Motivation
Information
Social Proof
Promotion
Branding

9. content_formats

content_formats

id	UUID PK
name	TEXT
description	TEXT
is_active	BOOLEAN
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

Seed:

Carousel
Single Feed
Reels
TikTok
Story
Poster
Infographic
Quiz
Announcement
Live
Video

10. platforms

platforms

id	UUID PK
name	TEXT
code	TEXT UNIQUE
is_active	BOOLEAN
created_at	TIMESTAMPTZ

Seed:

Instagram
TikTok
Facebook
YouTube
WhatsApp

11. campaigns

Campaign bersifat opsional.

campaigns

id	UUID PK
name	TEXT
description	TEXT
start_date	DATE
end_date	DATE
is_active	BOOLEAN
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

Contoh:

SKD CPNS 2026
Tryout Akbar
Bintara Polri 2026
Penerimaan Sekdin 2026
Promo Kelas Oktober

Satu campaign dapat memiliki banyak content.

12. ideas

Ini untuk Idea Bank.

ideas

id	UUID PK
title	TEXT
description	TEXT
program_id	UUID FK
pillar_id	UUID FK
source	TEXT
priority	TEXT
status	TEXT
created_by	UUID FK
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

Status:

NEW
SELECTED
PLANNED
ARCHIVED

Priority:

LOW
MEDIUM
HIGH

Relasi:

profiles → ideas
programs → ideas
pillars → ideas

13. contents

Ini adalah **tabel paling penting**.

contents

id	UUID PK
content_code	TEXT UNIQUE
title	TEXT
short_title	TEXT
program_id	UUID FK
pillar_id	UUID FK
format_id	UUID FK
campaign_id	UUID FK NULL
objective	TEXT
target_audience	TEXT
angle	TEXT
priority	TEXT
status	TEXT
hook	TEXT
main_content	TEXT
cta	TEXT
caption	TEXT
hashtags	TEXT
script	TEXT
creative_brief	TEXT
scheduled_at	TIMESTAMPTZ NULL
source_idea_id	UUID FK NULL
created_by	UUID FK
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

14. Content Status

Saya sarankan menggunakan status berikut:

PLANNED
BRIEF
PRODUCTION
REVIEW
REVISION
APPROVED
SCHEDULED
PUBLISHED
ARCHIVED

Kenapa tidak memakai EVALUATED?

Karena **Analytics** bukan **workflow status**.

Setelah:

PUBLISHED

kita tinggal memasukkan data performance.

Tidak perlu:

PUBLISHED

↓

EVALUATED

yang justru membuat workflow lebih rumit.

Jadi:

PLANNED

↓

BRIEF

↓

PRODUCTION

↓

REVIEW

↓

APPROVED

↓

SCHEDULED

↓

PUBLISHED

dan:

REVIEW

↓

REVISION

↓

PRODUCTION

15. Content ID

Kita tetap menggunakan format:

```
PR-2026-0001
PR-2026-0002
PR-2026-0003
```

Kolom:

```
content_code TEXT UNIQUE
```

Sedangkan id tetap UUID.

Jadi:

```
id
↓
internal database identity

content_code
↓
human-readable ID
```

Contoh:

```
id:
550e8400-e29b-41d4-a716-446655440000

content_code:
PR-2026-0025
```

16. content_platforms

Ini penting karena **satu content bisa dipublikasikan di beberapa platform.**

Contoh:

```
"5 Kesalahan SKD"
```

```
Instagram
TikTok
Facebook
```

Maka kita tidak memasukkan platform langsung ke contents.

Gunakan:

```
content_platforms
└──────────┴──────────┘
id          UUID PK
content_id  UUID FK
platform_id UUID FK


scheduled_at TIMESTAMPTZ NULL
```

```
published_at      TIMESTAMPTZ NULL
post_url          TEXT NULL
```

```
created_at        TIMESTAMPTZ
updated_at        TIMESTAMPTZ
```

```
UNIQUE (content_id, platform_id)
```

Relasi:



Contoh:

```
Content
PR-2026-0001
├── Instagram
├── TikTok
└── Facebook
```

17. Kenapa `scheduled_at` juga ada di `content_platforms`?

Karena bisa saja:

```
Instagram → 19:00
TikTok     → 20:00
Facebook   → 20:30
```

Jadi kita fleksibel.

Tetapi `contents.scheduled_at` bisa digunakan sebagai **jadwal utama/default**.

Jika hanya satu jadwal, cukup:

```
contents.scheduled_at
```

18. `content_assignments`

Untuk pembagian pekerjaan.

```
content_assignments
```

id	UUID PK
content_id	UUID FK
user_id	UUID FK
assignment_type	TEXT
created_at	TIMESTAMPTZ
updated_at	TIMESTAMPTZ

Assignment type:

PLANNER
COPYWRITER
DESIGNER
VIDEO_EDITOR
REVIEWER

Contoh:

PR-2026-0025

PLANNER	→ Andi
COPYWRITER	→ Budi
DESIGNER	→ Citra
VIDEO_EDITOR	→ Deni
REVIEWER	→ Eko

19. content_assets

Untuk file yang berhubungan dengan content.

content_assets

id	UUID PK
content_id	UUID FK
asset_type	TEXT
file_name	TEXT
file_path	TEXT
file_url	TEXT
uploaded_by	UUID FK
created_at	TIMESTAMPTZ

Asset type:

DESIGN
VIDEO
THUMBNAIL
DOCUMENT
OTHER

File fisiknya disimpan di:

Supabase Storage

Database hanya menyimpan referensinya.

20. Storage Structure

Saya sarankan satu bucket:

content-assets

Struktur:

```
content-assets/  
├── PR-2026-0001/  
│   ├── design/  
│   ├── video/  
│   └── thumbnail/  
├── PR-2026-0002/  
│   ├── design/  
│   └── video/
```

Tidak perlu membuat bucket:

```
design  
video  
thumbnail  
document
```

terpisah.

Satu bucket lebih mudah dikelola.

21. content_reviews

Menyimpan histori review.

content_reviews

id	UUID PK
content_id	UUID FK
reviewer_id	UUID FK
decision	TEXT
comment	TEXT
created_at	TIMESTAMPZ

Decision:

APPROVED
REVISION

Contoh:

Content

↓

Reviewer: Budi
Decision: REVISION
Comment:
"Hook slide pertama perlu lebih kuat."

Kemudian:

Content

↓

Reviewer: Budi
Decision: APPROVED
Comment:
"Sudah sesuai."

Histori tetap tersimpan.

22. content_analytics

Karena satu content bisa ada di banyak platform, analytics juga sebaiknya terkait ke content_platforms.

content_analytics

id	UUID PK
content_platform_id	UUID FK
views	BIGINT
reach	BIGINT
likes	BIGINT
comments	BIGINT
shares	BIGINT
saves	BIGINT
followers	BIGINT
engagement_rate	NUMERIC
recorded_at	TIMESTAMPZ
updated_at	TIMESTAMPZ

Contoh:

PR-2026-0001

Instagram

Views	25.000
Likes	1.200
Comments	150
Shares	400
Saves	600

TikTok	
Views	40.000
Likes	2.800
...	

Ini jauh lebih bagus daripada analytics langsung di `contents`, karena kita bisa membandingkan performa per platform.

23. `content_activity`

Activity log.

`content_activity`

<code>id</code>	UUID PK
<code>content_id</code>	UUID FK
<code>user_id</code>	UUID FK
<code>action</code>	TEXT
<code>description</code>	TEXT
<code>metadata</code>	JSONB NULL
<code>created_at</code>	TIMESTAMPTZ

Contoh action:


CREATED
UPDATED
ASSIGNED
STATUS_CHANGED
ASSET_UPLOADED
REVIEWED
REVISION_REQUESTED
APPROVED
SCHEDULED
PUBLISHED
ANALYTICS_UPDATED

Contoh:

Budi changed status
PRODUCTION → REVIEW

24. Relasi Lengkap

Secara database:

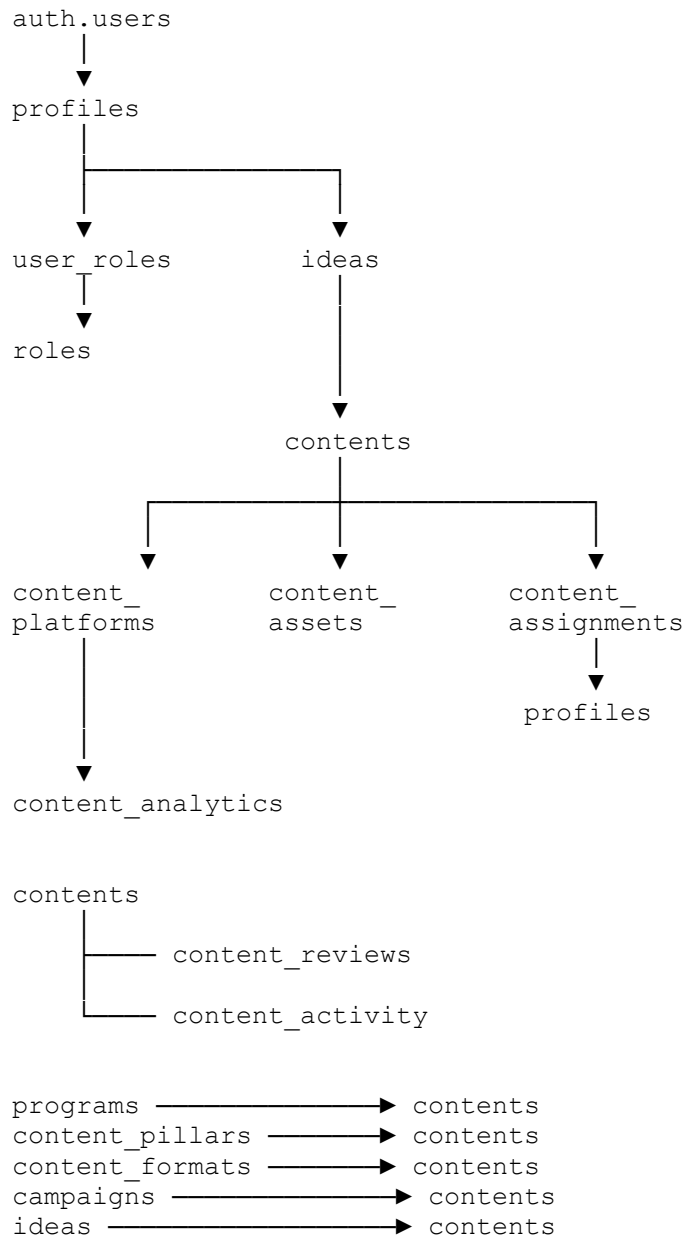

25. Full Table List

Jadi database final kita:

#	Table	Fungsi
1	profiles	Profil user

#	Table	Fungsi
2	roles	Role aplikasi
3	user_roles	Relasi user-role
4	programs	CPNS/Sekdin/Polri
5	content_pillars	Pilar konten
6	content_formats	Format konten
7	platforms	Instagram/TikTok/etc
8	campaigns	Campaign
9	ideas	Idea Bank
10	contents	Data utama content
11	content_platforms	Platform & jadwal
12	content_assignments	PIC
13	content_assets	File
14	content_reviews	Review
15	content_analytics	Performance
16	content_activity	Activity log

Jadi sebenarnya **16 tabel public**, bukan 14, karena `roles` dan `user_roles` kita tambahkan agar multi-role benar-benar rapi.

26. Supabase SQL — Struktur Dasar

Untuk Antigravity nanti, database dapat dibuat melalui migration SQL seperti ini:

```
create extension if not exists "pgcrypto";

create table public.profiles (
  id uuid primary key references auth.users(id) on delete cascade,
  full_name text not null,
  avatar_url text,
  is_active boolean not null default true,
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);
```

```
create table public.roles (
  id uuid primary key default gen_random_uuid(),
  name text not null unique,
  description text,
  created_at timestamptz not null default now()
);

create table public.user_roles (
  user_id uuid not null references public.profiles(id) on delete cascade,
  role_id uuid not null references public.roles(id) on delete cascade,
  created_at timestamptz not null default now(),
  primary key (user_id, role_id)
);

create table public.programs (
  id uuid primary key default gen_random_uuid(),
  name text not null,
  code text not null unique,
  description text,
  is_active boolean not null default true,
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

create table public.content_pillars (
  id uuid primary key default gen_random_uuid(),
  name text not null unique,
  description text,
  is_active boolean not null default true,
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

create table public.content_formats (
  id uuid primary key default gen_random_uuid(),
  name text not null unique,
  description text,
  is_active boolean not null default true,
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);

create table public.platforms (
  id uuid primary key default gen_random_uuid(),
  name text not null,
  code text not null unique,
  is_active boolean not null default true,
  created_at timestamptz not null default now()
);

create table public.campaigns (
  id uuid primary key default gen_random_uuid(),
  name text not null,
  description text,
  start_date date,
  end_date date,
  is_active boolean not null default true,
  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now()
);
```

27. Ideas SQL

```
create table public.ideas (  
  id uuid primary key default gen_random_uuid(),  
  
  title text not null,  
  description text,  
  
  program_id uuid references public.programs(id) on delete set null,  
  pillar_id uuid references public.content_pillars(id) on delete set null,  
  
  source text,  
  
  priority text not null default 'MEDIUM'  
    check (priority in ('LOW', 'MEDIUM', 'HIGH')),  
  
  status text not null default 'NEW'  
    check (status in ('NEW', 'SELECTED', 'PLANNED', 'ARCHIVED')),  
  
  created_by uuid references public.profiles(id) on delete set null,  
  
  created_at timestamptz not null default now(),  
  updated_at timestamptz not null default now()  
);
```

28. Contents SQL

```
create table public.contents (  
  id uuid primary key default gen_random_uuid(),  
  
  content_code text not null unique,  
  
  title text not null,  
  short_title text,  
  
  program_id uuid references public.programs(id) on delete set null,  
  pillar_id uuid references public.content_pillars(id) on delete set null,  
  format_id uuid references public.content_formats(id) on delete set null,  
  campaign_id uuid references public.campaigns(id) on delete set null,  
  
  objective text,  
  target_audience text,  
  angle text,  
  
  priority text not null default 'MEDIUM'  
    check (priority in ('LOW', 'MEDIUM', 'HIGH')),  
  
  status text not null default 'PLANNED'  
    check (  
      status in (  
        'PLANNED',  
        'BRIEF',  
        'PRODUCTION',  
        'REVIEW',  
        'REVISION',  
        'APPROVED',
```

```

        'SCHEDULED',
        'PUBLISHED',
        'ARCHIVED'
    )
),

hook text,
main_content text,
cta text,
caption text,
hashtags text,
script text,
creative_brief text,

scheduled_at timestamptz,

source_idea_id uuid
    references public.ideas(id)
    on delete set null,

created_by uuid
    references public.profiles(id)
    on delete set null,

created_at timestamptz not null default now(),
updated_at timestamptz not null default now()
);

```

29. Content Platforms SQL

```

create table public.content_platforms (
    id uuid primary key default gen_random_uuid(),

    content_id uuid not null
        references public.contents(id)
        on delete cascade,

    platform_id uuid not null
        references public.platforms(id)
        on delete cascade,

    scheduled_at timestamptz,

    published_at timestamptz,

    post_url text,

    created_at timestamptz not null default now(),
    updated_at timestamptz not null default now(),

    unique (content_id, platform_id)
);

```

30. Assignments SQL

```

create table public.content_assignments (
  id uuid primary key default gen_random_uuid(),

  content_id uuid not null
    references public.contents(id)
    on delete cascade,

  user_id uuid not null
    references public.profiles(id)
    on delete cascade,

  assignment_type text not null
    check (
      assignment_type in (
        'PLANNER',
        'COPYWRITER',
        'DESIGNER',
        'VIDEO_EDITOR',
        'REVIEWER'
      )
    ),

  created_at timestamptz not null default now(),
  updated_at timestamptz not null default now(),

  unique (content_id, assignment_type)
);

```

Dengan ini satu content hanya punya satu:

```

Planner
Copywriter
Designer
Video Editor
Reviewer

```

Tetapi satu user bisa menangani banyak content.

31. Assets SQL

```

create table public.content_assets (
  id uuid primary key default gen_random_uuid(),

  content_id uuid not null
    references public.contents(id)
    on delete cascade,

  asset_type text not null
    check (
      asset_type in (
        'DESIGN',
        'VIDEO',
        'THUMBNAIL',
        'DOCUMENT',
        'OTHER'
      )
    )

```

```

    ),
    file_name text not null,
    file_path text not null,
    file_url text,

    uploaded_by uuid
        references public.profiles(id)
        on delete set null,

    created_at timestamptz not null default now()
);

```

32. Review SQL

```

create table public.content_reviews (
    id uuid primary key default gen_random_uuid(),

    content_id uuid not null
        references public.contents(id)
        on delete cascade,

    reviewer_id uuid
        references public.profiles(id)
        on delete set null,

    decision text not null
        check (decision in ('APPROVED', 'REVISION')),

    comment text,

    created_at timestamptz not null default now()
);

```

33. Analytics SQL

```

create table public.content_analytics (
    id uuid primary key default gen_random_uuid(),

    content_platform_id uuid not null
        references public.content_platforms(id)
        on delete cascade,

    views bigint not null default 0,
    reach bigint not null default 0,
    likes bigint not null default 0,
    comments bigint not null default 0,
    shares bigint not null default 0,
    saves bigint not null default 0,
    followers bigint not null default 0,

    engagement_rate numeric(8,2),

    recorded_at timestamptz not null default now(),
    updated_at timestamptz not null default now()
);

```

```
);
```

34. Activity SQL

```
create table public.content_activity (  
  id uuid primary key default gen_random_uuid(),  
  
  content_id uuid not null  
    references public.contents(id)  
    on delete cascade,  
  
  user_id uuid  
    references public.profiles(id)  
    on delete set null,  
  
  action text not null,  
  
  description text,  
  
  metadata jsonb,  
  
  created_at timestamptz not null default now()  
);
```

35. Index yang Perlu

Kita jangan membuat index berlebihan.

Yang penting:

```
create index idx_contents_status  
on public.contents(status);  
  
create index idx_contents_program  
on public.contents(program_id);  
  
create index idx_contents_pillar  
on public.contents(pillar_id);  
  
create index idx_contents_scheduled_at  
on public.contents(scheduled_at);  
  
create index idx_contents_created_by  
on public.contents(created_by);  
  
create index idx_content_platforms_platform  
on public.content_platforms(platform_id);  
  
create index idx_content_assignments_user  
on public.content_assignments(user_id);  
  
create index idx_content_activity_content  
on public.content_activity(content_id);
```

```
create index idx_ideas_status
on public.ideas(status);
```

```
create index idx_ideas_program
on public.ideas(program_id);
```

Cukup. Tidak perlu indexing semua kolom.

36. Seed Data

Supabase nantinya perlu seed data awal.

Roles

```
Admin
Content Planner
Copywriter
Designer
Video Editor
Reviewer
```

Programs

```
CPNS
SEKDIN
POLRI
GENERAL
```

Pillars

```
Education
Engagement
Motivation
Information
Social Proof
Promotion
Branding
```

Platforms

```
Instagram
TikTok
Facebook
YouTube
WhatsApp
```

Formats

```
Carousel
Single Feed
Reels
TikTok
```

Story
Poster
Infographic
Quiz
Announcement
Live
Video

37. Relasi Idea → Content

Ini penting.

Ketika:

Idea
"5 Kesalahan Peserta SKD"

di-convert:

```
ideas.id
      ↓
contents.source_idea_id
```

Jadi kita bisa mengetahui:

Content ini berasal dari ide yang mana?

Tetapi kalau content dibuat langsung tanpa Idea Bank:

```
source_idea_id = NULL
```

Tidak masalah.

38. Relasi Content → Platform

Contoh:

```
PR-2026-0025
  |
  ├── Instagram
  ├── TikTok
  └── Facebook
```

Masing-masing bisa punya:

```
scheduled_at
published_at
post_url
```

Ini membuat aplikasi siap berkembang tanpa harus mengubah struktur database kalau nanti satu konten diposting ke banyak platform.

39. Relasi Content → PIC

Contoh database:

PR-2026-0025

content_assignments

PLANNER

Andi

COPYWRITER

Budi

DESIGNER

Citra

VIDEO_EDITOR

Deni

REVIEWER

Eko

Lalu halaman:

My Content

cukup mencari:

content_assignments.user_id = current_user.id

Tidak perlu membuat tabel my_contents.

40. Relasi Content → Review

Review tidak ditaruh langsung di contents.

Kenapa?

Karena satu content bisa direview berkali-kali:

Review #1

REVISION

"Hook kurang kuat"

Review #2
REVISION
"CTA perlu diperbaiki"

Review #3
APPROVED
"Sudah sesuai"

Semua histori tetap ada.

41. Relasi Content → Activity

Demikian juga Activity.

Satu content bisa mempunyai banyak aktivitas:

CREATED
UPDATED
ASSIGNED
ASSET_UPLOADED
STATUS_CHANGED
REVISION_REQUESTED
APPROVED
SCHEDULED
PUBLISHED
ANALYTICS_UPDATED

Jadi kita memiliki audit trail sederhana.

42. RLS — Gambaran Awal

RLS belum saya tuliskan full policy di tahap ini karena **RLS akan kita bahas sebagai dokumen berikutnya.**

Tetapi struktur database ini sudah dirancang supaya RLS mudah dibuat.

Konsepnya:

Admin
↓
Full Access

Content Planner
↓
Planning + Content

Copywriter
↓
Content yang ditugaskan

Designer
↓
Content yang ditugaskan

Video Editor
↓
Content yang ditugaskan

Reviewer
↓
Content yang perlu direview

Dan semua user:

Tidak boleh membaca/mengubah
data user lain secara sembarangan

43. Hal yang Sengaja TIDAK Kita Buat

Ini penting supaya Antigravity tidak over-engineer.

Tidak ada:

- ✗ `table calendars`
- ✗ `table production_boards`
- ✗ `table published_contents`
- ✗ `table review_queue`
- ✗ `table my_contents`
- ✗ `table dashboard`
- ✗ `table reports`
- ✗ `table notifications`
- ✗ `table comments`
- ✗ `table content_versions`
- ✗ `table workflow_stages`
- ✗ `table program_subcategories`

Untuk MVP semua itu **belum diperlukan**.

Contohnya:

`Calendar`

hanyalah:

`contents + content_platforms`

Sedangkan:

`Production`

adalah:

```
contents WHERE status IN (...)
```

Dan:

Review


adalah:

```
contents WHERE status = 'REVIEW'
```

Ini membuat aplikasi jauh lebih ringan.

44. Final Database Architecture

Jadi saya rekomendasikan kita **kunci database v1.0** seperti ini:

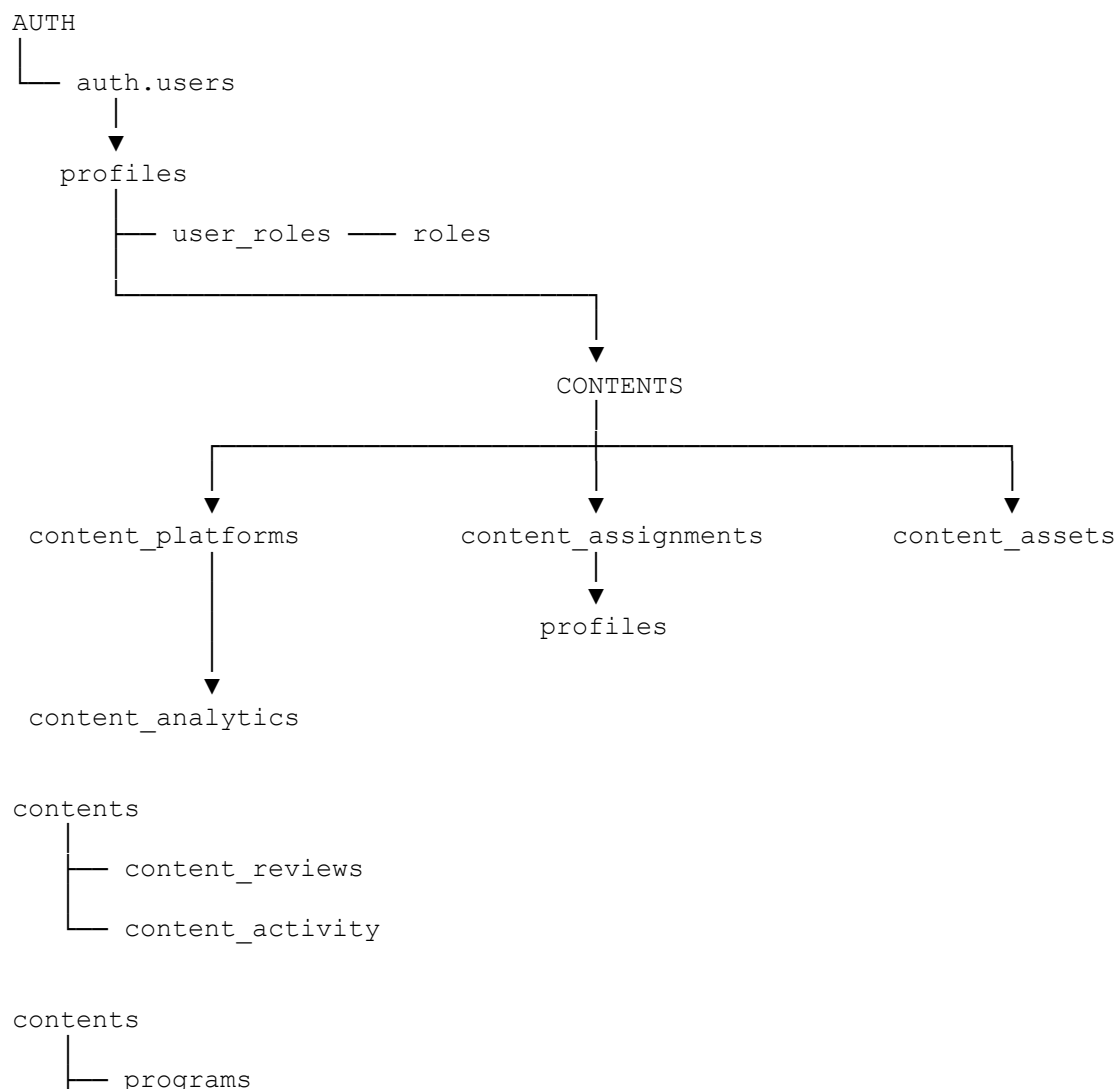

```
|— content_pillars
|— content_formats
|— campaigns
|— ideas
```

Ini sudah cukup kuat untuk membangun aplikasi v1 tanpa membuat backend yang ribet.