



Xcelerate➤

QSCOLLECT API IMPLEMENTATION GUIDE

TABLE OF CONTENTS

Introduction.....	3
API Connection Details:	4
API Endpoint URL:.....	4
API Key:.....	4
File Integration Username	4
Username and Password	4
API Rules and Field Data Types.....	5
Allowed File Types	5
API Methods	6
Authentication Method	6
Request.....	6
Responses	7
File Submission Methods.....	9
Allowed File Types	9
Xcelerate Rejection Codes	10
APIFileModel.....	12
Debit Order/Collection Files	14
Disbursement/Payment Files.....	22
Reporting Methods.....	35
Available Reports.....	35
Report Schedule	35
Xcelerate Report Specifications.....	37
Report Endpoints	40
GetReportsForPreviousBusinessDay Method.....	42
GetReportsByDate Method	46
DownloadReportFile Method	50

INTRODUCTION

The QSCollectAPI is one of the file submission channels that QSURE(PTY) LTD offers to external service providers who wish to import Debit Order and/or Disbursement files that are required to be processed through the Xcelerate system.

This Channel allows service providers to interface their in-house systems directly and securely with QSURE (PTY) LTD.

The API allows the following actions which uses the Standard Xcelerate File layout as well as the One File Solution File Layout:

- **SUBMIT COLLECTION (DEBIT ORDER) FILES:**
This process submits a collection file to the API to be imported into the Xcelerate system.
- **SUBMIT PAYMENT (DISBURSEMENT) FILES**
This process submits a payment file to the API to be imported into the Xcelerate system.

This document will focus on the integration and method implementation to the different API methods available. It also covers the message and request structures for different API Methods and provides sample postman requests. This can be used as an example on how to consume the QSCOLLECT API.

THE QSCOLLECT API IS A RESTFUL JSON SERVICE THAT RUNS OVER HTTPS.

API CONNECTION DETAILS:

API ENDPOINT URL:

<https://qscollectapi.qsure.co.za:62415>

You will need the following mandatory details to use the API:

API KEY:

An API Key will be provided, which will be used to authenticate requests and allow access to the API.

The API Key must be used with all requests to the API and is known as the **client_id**. This value is as follows:

533BEDE7-0172-4ACA-9E25-439B1BF37AD0

FILE INTEGRATION USERNAME

This value is provided by QSURE and needs to be used when submitting transaction files to the API as this value is used in the configuration of the Policy Admin System File Layout for the client on the Xcelerate System.

USERNAME AND PASSWORD

You will need a username and password for authentication purposes. This username will be linked to the File Import record as well as the transactions that are imported.

API RULES AND FIELD DATA TYPES

FIELD TYPES	REQUIRED TYPES
String	M = Mandatory
Integer	O = Optional
Boolean	C = Conditional
DateTime	

ALLOWED FILE TYPES

Allowed file types are .csv (Comma Separated Values) and .txt (Width Delimited Values). The file type and column layout are configured in the Policy Admin System file layout defined for your file import profile on Xcelerate.

XCELERATE PASSWORD EXPIRY

Please note, Xcelerate has a Password expiry security rule where a user's password expires every 72 days. If the user's password is expired, they will not be able to authenticate and receive a valid access/refresh token when using the API. Any integration with the QSCollectAPI needs to ensure that when a user updates their password on Xcelerate, the software integrating with the API uses the new password to authenticate the user.

API METHODS

AUTHENTICATION METHOD

This method allows the end-user to request an authentication token to be able to access all subsequent API functions.

This method requires a **x-www-form-encoded** request body containing the Username, Password (For Password expiry security rule please see section: [Xcelerate Password Expiry](#)), and Client ID (Provided by QSURE (PTY) LTD).

This method will return a response that contains the **ACCESS TOKEN** as well as the **REFRESH TOKEN** to be used in subsequent requests.

REQUEST

REQUEST FIELDS


Field Name	Field Type	Mandatory/Optional	Description
Username	String	Mandatory	Provided by QSURE
Password	String	Mandatory	Provided by QSURE
grant_type	String	Mandatory	This value will always be "password"
client_id	GUID	Mandatory	Provided by QSURE – Value is in the API Key section of this document

REQUEST SAMPLE

URL	APIUrl /token
Method	POST
Header	Content-Type: application/x-www-form-urlencoded
Request Body (x-www-form-urlencoded)	<pre>{ "Username": [Username assigned to the client for the API], "Password": [Password for the username assigned to the client for the API], "grant_type": "password", "client_id": "API Key" }</pre>

REQUEST EXAMPLE

Postman Request Example

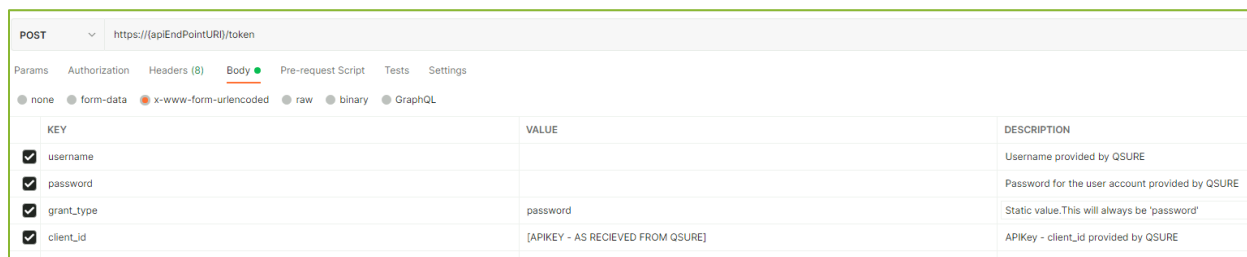

POST https://(apiEndPointURI)/token

Params Authorization Headers (8) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL

KEY	VALUE	DESCRIPTION
☒ username		Username provided by QSURE
☒ password		Password for the user account provided by QSURE
☒ grant_type	password	Static value. This will always be 'password'
☒ client_id	[APIKEY - AS RECEIVED FROM QSURE]	APIKey - client_id provided by QSURE

RESPONSES

SUCCESSFUL RESPONSE

Property	Value
Response Code	200 (OK)
Content-Type	Content-Type: application/json
Content	<pre>{ "access_token": "pVPQnoy9h...[omitted].....QPkUcpWLyQ", "token_type": "bearer", "expires_in": 1799, "refresh_token": "fa484..[omitted]...7b4a", "as:client_id": "API Key", "userName": "[Username used in the request]" }</pre>

FAILED RESPONSES:

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "error": "invalid_grant", "error_description": "The user name does not exist or the password is incorrect." }</pre>
Reason For Failure	Authentication details used for the request are incorrect.
Resolution	Confirm that you are using the correct username and password combination and try again. Please see the Xcelerate Password Expiry section.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	{ "error": "invalid_clientId", "error_description": "Client ' API Key ' is not registered in the system." }
Reason For Failure	An incorrect APIKey was used for the request.
Resolution	Use the correct APIKey and try again.

CONFIDENTIAL

FILE SUBMISSION METHODS

There are two file submission API Endpoint Methods currently available. These are as follows:

- DEBIT ORDERS/COLLECTIONS
- DISBURSEMENT/PAYMENTS

The QSCOLLECT API offers the standard xcelerate csv or wdv file format as well as the xcelerate one file solution format (multiple sub account records in a single file)

ALLOWED FILE TYPES

Allowed file types are .csv (Comma Separated Values) and .txt (Width Delimited Values). The file type and column layout are configured in the Policy Admin System file layout defined for your file import profile on Xcelerate.

XCELERATE REJECTION CODES

Rejection Type	Rejection Code	Rejection Description
Internal	ODAT	Zero Date
Internal	ABD	Account Blocked from Debiting
Internal	ABDI	Account - No Debits Allowed
Internal	ACLN	Invalid Account Length for Bank
Internal	ACTP	Invalid Account Type
Internal	ACTS	Debits not Allowed to Savings Account
Internal	ALEN	Invalid Account Length
Internal	AMTO	Zero Amount
Internal	ATR	Account Type Recognitions
Internal	BRCC	Homing Branch Closed
Internal	BRCE	Homing Branch Not EFT Branch
Internal	BRCH	Invalid Homing Branch Code
Internal	BRCU	Invalid User Branch Code
Internal	CDVH	Invalid Homing Account
Internal	DATE	Invalid or Expired Strike Date
Internal	DIC	Data is Corrupt
Internal	FDAT	Future Strike Date Not Accepted
Internal	HAC2	Two account numbers supplied
Internal	HACN	Invalid Homing Account Name
Internal	HDAY	Cannot collect on a Sunday or Public Holiday
Internal	ILEX	Item Limit Exceeded
Internal	RBNK	Only FNB Bank accounts valid for Real Time
Internal	RCID	Invalid Record Identifier
Internal	RFNB	Only 11 digit FNB Accounts allowed for Real Time
Internal	RI	Invalid Record Identifier
Internal	UREF	Invalid User Reference
External	02	Not provided for (equivalent to R/D on a cheque)
External	03	Debits not allowed to this account
External	04	Payments stopped (by a/c holder)
External	06	Account frozen (as in divorce, etc.)
External	08	Account in sequestration (private individual)
External	10	Account in liquidation (company)

External	12	Account closed (with no forwarding details)
External	16	Account transferred (to another banking group)
External	18	Account holder deceased
External	22	Account effects not cleared
External	26	No such account
External	28	Recall / Withdrawal
External	30	No authority to debit
External	32	Debit in contravention of payer's authority
External	34	Authorisation cancelled
External	36	Previously stopped via stop payment advice
External	56	Not FICA compliant
External	50	Other

APIFILEMODEL

All file submission API Endpoints use the same Input Request Model called: ApiFileModel.

This needs to be passed in as JSON content in the request body.

Property Name	Property Type	M/O/C	Description
refresh_token	String	M	Refresh token value from the authentication request.
file_name	String	M	Filename to use for this import. This must always contain the file extension. (EG. CollectionFileToImport.csv) Allowed file types are .csv(Comma Separated Values) and .txt(Width Delimited Values). The file type is configured in the Policy Admin System file layout defined for your profile
file_contents	String	M	File contents – Transaction records based on the Policy Admin System layout for the client (Setup in Xcelerate). The file contents need to be converted to a base64 string.
file_integration_user	String	M	File Integration Username as received from QSURE
header_first_row	Boolean	O	File contains header row
international_transactions	Boolean	O	File contains international transactions
bucket_startdate	DateTime	M	Start Date of the period for the transactions. This can be the same as the action/strike date of the transactions.
subaccount_unique_id	string	M/C	Unique sub account identifier to be used when linking transactions to a specific Sub Account when the file contents DO NOT contain the Sub Account Unique Identifier in the file content transaction line items (Xcelerate One File Solution). A list of the sub account unique id's can

			be obtained from your QSURE Service consultant.
file_sequence_number	integer	C	The following sequence number following a previous file submission (Start with 1 and increment with each file submitted).
autosave_transactions	Boolean	C	Determines if the API should save the transactions automatically. Default value is set to TRUE if not specified. This should only be set to FALSE if the user needs to review the transactions on Xcelerate before saving them.

All API File submission endpoints will respond with the following response model in JSON Format:

Property Name	Property Type	Description
FileImportID	Integer	File Import ID from the Xcelerate system if the file is accepted.
Message	String	File import message detailing if the import was successful, partially successful or failed.
RequestID	Long	Request Log ID of the request made. This should be provided to QSURE if an error occurred.
Success	Boolean	File status.
TransactionReportLog	String	Transaction report log based on the configured export file layout for the file imported. This gives a brief report about the transactions, failed and successful with the reason for failure if any.
TransactionList	Dynamic	List of transactions and their details

TotalTransactionCount	Integer	Total transactions in the file
TotalTransactionAmount	Double	Total Amount of all transactions
TransactionsAcceptedCount	Integer	Total number of accepted transactions
TransactionsAcceptedAmount	Double	Total Amount of accepted transactions
TransactionsRejectedCount	Integer	Total amount of rejected transactions
TransactionsRejectedAmount	Double	Total amount of rejected transactions

DEBIT ORDER/COLLECTION FILES

This method allows debit order/collection files to be imported. It is a POST method. It requires an APPLICATION/JSON request body of the [APIFileModel](#) as defined above.

REQUEST BODY

The request body is of type [APIFileModel](#) and is passed to the request as JSON.

REQUEST SAMPLE

URL	APIUrl /submitcollectionfile
Method	POST
Header	Content-Type: application/json
Request Body	<pre>{ "refresh_token" : " fa484..[omitted]...7b4a", "grant_type" : "refresh_token", "client_id" : "API Key",, "file_name" : "CollectionFileToImport.csv", "file_contents" : "NTAsNjMy..[Ommited]...wyMzAyMjgsMQ==", "file_integration_user" : "[Provided by QSURE]", "international_transactions" : "false", "header_first_row" : "false", "bucket_startdate" : "2023-01-01", "subaccount_unique_id" : "[unique identifier provided by QSURE]" "file_sequence_number" : 1, "autosave_transactions": "true" }</pre>

CONFIDENTIAL

RESPONSES

SUCCESSFUL RESPONSE

Property	Value
Response Code	200 (OK)
Content-Type	Content-Type: application/json
Content	See section: Responses for Accepted/Rejected Transactions for Collections And Payments
Information	The response contains information about the transactions that were submitted. If they are all accepted, they will appear in the acceptedTransactions property. The data will be a list of transactions with information relating to the accepted transactions. If there are any rejected transactions, they will appear in the rejectedTransactions property. The data will be a list of transactions with information relating to the rejected transactions. The transaction Status will be Internally Rejected and the internalRejectionReasonTitle and internalRejectionReasonDescription will contain the reason why they were rejected. E.g.: Past Action Date (Meaning the date of the transactions submitted are for a date less than the current date of submission). There are examples below of the 3 different type of responses that can be returned based on the data received.

FAILED RESPONSES:

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["refresh_token fa484..[omitted]...7b4a is not Valid"] } }</pre>
Reason For Failure	The refreshtoken used in the request is invalid.
Resolution	Make the /token endpoint again and use the correct refreshtoken value from the authentication request.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" The User associated with the refresh_token does not have any Access Agreements."] } }</pre>
Reason For Failure	The user account you have used to make the authentication request does not have access to any agreements on the Xcelerate System.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" No Sub Account Linked to subaccount_unique_id [subaccount_unique_id]"] } }</pre>
Reason For Failure	The sub account unique identifier you have specified does not exist in the Xcelerate System.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" file_integration_user [file_integration_user] does not exist"] } }</pre>
Reason For Failure	The File Integration Username that you are using does not exist.
Resolution	Check that you are using the File Integration Username specified by QSURE. If you are, then Contact QSURE (PTY) LTD to resolve the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" The User associated with the refresh_token does not have access to the Entity associated with the file_integration_user {model.file_integration_user}"] } }</pre>
Reason For Failure	The user account you are using for authentication does not have access to the Xcelerate Entity that is linked to the FTP Integration User that you are using in your requests.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" Ambiguous file_integration_user [file_integration_user] + User Agreement Access. Please contact your QSURE consultant"] } }</pre>
Reason For Failure	There are multiple FTP Integration users with the same FTP Integration Username that you are using to make the request.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["[fileExtension] is not an accepted file format "] } }</pre>
Reason For Failure	The file extension of the file is not an accepted file extension.
Resolution	Please use only the allowed filetypes as specified by QSURE (PTY) LTD

Property	Value
Response Code	400 (Bad request)

Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["No Import File Layout Found for file_integration_user [file_integration_user]] [fileExtension]"] } }</pre>
Reason For Failure	There is no Import file layout setup on the Xcelerate system that is linked to your FTP Integration Username.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" The User associated with the refresh_token does not have access to the Interest Group associated with the file_integration_user [file_integration_user]"] } }</pre>
Reason For Failure	The username that you have used in your authentication request does not have the correct access rights to import transactions that are linked to the Interest group that is linked to Sub Account Identifier that is being used.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)

Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["The User associated with the refresh_token does not have access to the Sub Account associated with the file_integration_user [file_integration_user]"] } }</pre>
Reason For Failure	The username that you have used in your authentication request does not have the correct access rights to import transactions that are linked to the Sub Account Identifier that is being used.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" No Sub Account or Bucket Period Supplied"] } }</pre>
Reason For Failure	There was no Unique Sub Account Identifier specified or the Bucket Start Date was not specified. Please specify the information and try the request again.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

DISBURSEMENT/PAYMENT FILES

This method allows disbursement/payment files to be imported. It is a POST method. It requires an **APPLICATION/JSON** request body of the **APIFileModel** as defined above.

Allowed file types are .csv and .txt

REQUEST BODY

The request body is of type **APIFileModel** and is passed to the request as JSON.

REQUEST SAMPLE

URL	APIUrl /submitpaymentfile
Method	POST
Header	Content-Type: application/json
Request Body	<pre>{ "refresh_token" : " fa484..[omitted]...7b4a", "grant_type" : "refresh_token", "client_id" : "API Key", "file_name" : "PaymentFileToImport.csv", "file_contents" : "NTAsNjMy..[Ommited]...wyMzAyMjgsMQ==", "file_integration_user" : "[Provided by QSURE]", "international_transactions" : "false", "header_first_row" : "false", "bucket_startdate" : "2023-01-01", "subaccount_unique_id" : "[unique identifier provided by QSURE]", "file_sequence_number" : 1, "autosave_transactions" : "true" }</pre>

RESPONSES

SUCCESSFUL RESPONSE

Property	Value
Response Code	200 (OK)
Content-Type	Content-Type: application/json
Content	See Section: Responses For Accepted/Rejected Transactions for Collections And Payments
Information	The response contains information about the transactions that were submitted. If they are all accepted, they will appear in the acceptedTransactions property. The data will be a list of transactions with information relating to the accepted transactions. If there are any rejected transactions, they will appear in the rejectedTransactions property. The data will be a list of transactions with information relating to the rejected transactions. The transaction Status will be Internally Rejected and the internalRejectionReasonTitle and internalRejectionReasonDescription will contain the reason why they were rejected. E.g.: Past Action Date (Meaning the date of the transactions submitted are for a date less than the current date of submission). There are examples below of the 3 different type of responses that can be returned based on the data received.

FAILED RESPONSES:

If an internal error occurs on the API The following will be returned With a 200(OK) Status code (Due to security and data privacy) :

Property	Value
Response Code	200(OK)
Content-Type	Content-Type: application/json
Content	<pre>{ "Message": "Error occurred during file import. Please contact QSURE (PTY) LTD and provide your Request Log ID: [REQUESTID]", "Success": false, "RequestID": [REQUESTID], "TransactionList": null, "TransactionReportLog": null, "FileImportId": [File Import ID], "TotalTransactionCount": 0, "TotalTransactionAmount": 0.0, "TransactionsAcceptedCount": 0, "TransactionsAcceptedAmount": 0.0,</pre>

	<pre> "TransactionsRejectedCount": 0, "TransactionsRejectedAmount": 0.0 } </pre>
Resolution	Contact QSURE and provide the RequestID and File Import ID (If there is a value). This will help in finding and resolving the issue. This call will return a 200(OK) code for privacy and security reasons if an internal server error occurs.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": ["refresh_token fa484..[omitted]...7b4a is not Valid"] } } </pre>
Reason For Failure	The refreshtoken used in the request is invalid.
Resolution	Make the /token endpoint again and use the correct refreshtoken value from the authentication request.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" The User associated with the refresh_token does not have any Access Agreements."] } } </pre>

	<pre> } } </pre>
Reason For Failure	The user account you have used to make the authentication request does not have access to any agreements on the Xcelerate System.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" No Sub Account Linked to subaccount_unique_id [subaccount_unique_id]"] } } </pre>
Reason For Failure	The sub account unique identifier you have specified does not exist in the Xcelerate System.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" file_integration_user [file_integration_user] does not exist"] } } </pre>

	<pre> } } </pre>
Reason For Failure	The File Integration Username that you are using does not exist.
Resolution	Check that you are using the File Integration Username specified by QSURE. If you are, then Contact QSURE (PTY) LTD to resolve the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" The User associated with the refresh_token does not have access to the Entity associated with the file_integration_user {model.file_integration_user}"] } } </pre>
Reason For Failure	The user account you are using for authentication does not have access to the Xcelerate Entity that is linked to the FTP Integration User that you are using in your requests.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" Ambiguous file_integration_user [file_integration_user] + User Agreement Access. Please contact your QSURE consultant"] } } </pre>

	<pre>] } } </pre>
Reason For Failure	There are multiple FTP Integration users with the same FTP Integration Username that you are using to make the request.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": ["[fileExtension] is not an accepted file format "] } } </pre>
Reason For Failure	The file extension of the file is not an accepted file extension.
Resolution	Please use only the allowed filetypes as specified by QSURE (PTY) LTD

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": ["No Import File Layout Found for file_integration_user [file_integration_user]] [fileExtension]"] } } </pre>

	<pre> } } </pre>
Reason For Failure	There is no Import file layout setup on the Xcelerate system that is linked to your FTP Integration Username.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": ["The User associated with the refresh_token does not have access to the Interest Group associated with the file_integration_user [file_integration_user]"] } } </pre>
Reason For Failure	The username that you have used in your authentication request does not have the correct access rights to import transactions that are linked to the Interest group that is linked to Sub Account Identifier that is being used.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": ["The User associated with the refresh_token does not have access to the Sub Account associated with the file_integration_user [file_integration_user]"] } } </pre>

	<pre>] } } </pre>
Reason For Failure	The username that you have used in your authentication request does not have the correct access rights to import transactions that are linked to the Sub Account Identifier that is being used.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" No Sub Account or Bucket Period Supplied"] } } </pre>
Reason For Failure	There was no Unique Sub Account Identifier specified or the Bucket Start Date was not specified. Please specify the information and try the request again.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

RESPONSES FOR ACCEPTED/REJECTED TRANSACTIONS FOR COLLECTIONS AND PAYMENTS

Description	Response
All Transactions Accepted	<pre> { "message": "File Import Successful. 2 Transaction(s) Accepted.", "success": true, "requestID": [Request ID Value], "transactionList": { "transactionTypes": "Collections", "failedTransactionList": [], </pre>

	<pre> "acceptedTransactionList": [{ "transactionID": [TransactionID Value], "transactionType": "Collection", "transactionSubType": null, "transactionStatus": "Awaiting Authorisation", "actionDate": "2023-05-26T00:00:00", "amount": 1000.0, "transactionReference": [Transaction Reference] "comment": null, "accountHolder": [Account Holder], "accountNumber": [Account Number] "branchNumber": [Branch Code], "exportFileID": [exportFileID], "creationDate": "2023-05-26T00:00:00", "internalRejectionReasonTitle": null, "internalRejectionReasonDescription": null, "internalRejectionReasonCode": null, "clientImportFileID": [Client Import File ID] }], "transactionReportLog": "[String report of transactions, line separated by \r\n]", "fileImportId": [File Import ID], "totalTransactionCount": 2, "totalTransactionAmount": 4500.0, "transactionsAcceptedCount": 2, "transactionsAcceptedAmount": 4500.0, "transactionsRejectedCount": 0, "transactionsRejectedAmount": 0.0 } </pre>
All Transactions Rejected	<pre> { "message": "File Import Failed - Transaction Exceptions Occured. Please check the TransactionList.FailedTransactionList response field. ", "success": false, "requestID": 269, "transactionList": { "transactionTypes": "Collections", "failedTransactionList": [{ "transactionID": [transactionID], "transactionType": "Collection", "transactionSubType": null, "transactionStatus": "Internal Rejections", "actionDate": "2023-05-20T00:00:00", </pre>

```

    "amount": 1000,
    "transactionReference": [transactionReference],
    "comment": null,
    "accountHolder": [accountHolder],
    "accountNumber": [accountNumber],
    "branchNumber": "025500",
    "exportFileID": 4275,
    "creationDate": "2023-05-26T00:00:00",
    "internalRejectionReasonTitle": "CDV Validation Failed",
    "internalRejectionReasonDescription": "CDV Validation Failed",
    "internalRejectionReasonCode": "CDVE",
    "clientImportFileID": null
  },
  {
    "transactionID": [transactionID],
    "transactionType": "Collection",
    "transactionSubType": null,
    "transactionStatus": "Internal Rejections",
    "actionDate": "2023-05-22T00:00:00",
    "amount": 3500,
    "transactionReference": [transactionReference],
    "comment": null,
    "accountHolder": [accountHolder],
    "accountNumber": [accountNumber],
    "branchNumber": [branchNumber],
    "exportFileID": [exportFileID],
    "creationDate": "2023-05-26T00:00:00",
    "internalRejectionReasonTitle": "Past Action Date",
    "internalRejectionReasonDescription": "Past Action Date",
    "internalRejectionReasonCode": "PACD",
    "clientImportFileID": null
  }
],
"acceptedTransactionList": []
},
"transactionReportLog": "[String report of transactions, line separated by \r\n]",
"fileImportId": [fileImportId],
"totalTransactionCount": 2,
"totalTransactionAmount": 4500,
"transactionsAcceptedCount": 0,
"transactionsAcceptedAmount": 0,
"transactionsRejectedCount": 2,
"transactionsRejectedAmount": 4500

```

	<pre> }</pre>
Partially Accepted and partially Rejected	<pre> { "message": "File Import Partially Successful. 1 Transaction(s) Accepted and 1 Transaction(s) Rejected.", "success": true, "requestID": 266, "transactionList": { "transactionTypes": "Collections", "failedTransactionList": [{ "transactionID": [Transaction ID], "transactionType": "Collection", "transactionSubType": null, "transactionStatus": "Internal Rejections", "actionDate": "2023-05-20T00:00:00", "amount": 1000.0, "transactionReference": "[Transaction Reference]", "comment": null, "accountHolder": "[Account Holder]", "accountNumber": "[Account Number]", "branchNumber": "[Branch Code]", "exportFileID": [ExportFileId], "creationDate": "2023-05-26T00:00:00", "internalRejectionReasonTitle": "Past Action Date", "internalRejectionReasonDescription": "Past Action Date", "internalRejectionReasonCode": "PACD", "clientImportFileID": [Client Import File ID] }], "acceptedTransactionList": [{ "transactionID": [Transaction ID], "transactionType": "Collection", "transactionSubType": null, "transactionStatus": "Awaiting Authorisation", "actionDate": "2023-05-26T00:00:00", "amount": 3500.0, "transactionReference": "[Transaction Reference]", "comment": null, "accountHolder": "[Account Holder]", "accountNumber": "[Account Number]", "branchNumber": "[Branch Code]", "exportFileID": [Export File ID], "creationDate": "2023-05-26T00:00:00", </pre>

	<pre> "internalRejectionReasonTitle": null, "internalRejectionReasonDescription": null, "internalRejectionReasonCode": null, "clientImportFileID": [Client Import File ID] }] }, "transactionReportLog": "[String report of transactions, line separated by \r\n]", "fileImportId": [File Import ID], "totalTransactionCount": 2, "totalTransactionAmount": 4500.0, "transactionsAcceptedCount": 1, "transactionsAcceptedAmount": 3500.0, "transactionsRejectedCount": 1, "transactionsRejectedAmount": 1000.0 } </pre>
All Rejected (Xcelerate Business Rule: Fail Full File on Failed Transaction Count greater than 0.)	<pre> { "message": "File Import Failed - Transaction Exceptions Occured. Please check the TransactionList.FailedTransactionList response field. File Cancelled/Failed due to Xcelerate Business Rule: Fail Full File on Failed Transaction Count greater than 0.", "success": false, "requestID": 1, "transactionList": { "transactionTypes": "Collections", "failedTransactionList": [{ "transactionID": 123456789, "transactionType": "Collection", "transactionSubType": null, "transactionStatus": "Internal Rejections", "actionDate": "2023-05-20T00:00:00", "amount": 1000, "transactionReference": "Transaction Reference", "comment": null, "accountHolder": "Account Holder", "accountNumber": "000000000000", "branchNumber": "255005", "exportFileID": null, "creationDate": "2023-05-22T00:00:00", "internalRejectionReasonTitle": "Past Action Date", "internalRejectionReasonDescription": "Past Action Date", "internalRejectionReasonCode": "PACD", "clientImportFileID": null }] } } </pre>

```
    },  
    "acceptedTransactionList": [  
      {  
        "transactionID": 1234567890,  
        "transactionType": "Collection",  
        "transactionSubType": null,  
        "transactionStatus": "Awaiting Authorisation",  
        "actionDate": "2023-05-26T00:00:00",  
        "amount": 3500,  
        "transactionReference": "Transaction Reference",  
        "comment": null,  
        "accountHolder": "Account Holder",  
        "accountNumber": "1111111111",  
        "branchNumber": "255005",  
        "exportFileID": null,  
        "creationDate": "2023-05-22T00:00:00",  
        "internalRejectionReasonTitle": null,  
        "internalRejectionReasonDescription": null,  
        "internalRejectionReasonCode": null,  
        "clientImportFileID": null  
      }  
    ],  
    "transactionReportLog": "[String report of transactions, line separated by \\r\\n]",  
    "fileImportId": [File Import ID],  
    "totalTransactionCount": 2,  
    "totalTransactionAmount": 4500,  
    "transactionsAcceptedCount": 1,  
    "transactionsAcceptedAmount": 3500,  
    "transactionsRejectedCount": 1,  
    "transactionsRejectedAmount": 1000  
  }  
}
```

REPORTING METHODS

The QSCollect API allows the user to access some reports which can be used to import/view information about the transactions that we submitted.

AVAILABLE REPORTS

Report ID	Report Name	Description	File Format
94	Collection Import Summary	A summary of the collections imported	CSV, TXT, PDF
95	Internal Collection Rejections	Collections rejected internally on Import (EG: CDV Validation Failed, Past Action Date, etc.)	CSV, TXT, PDF
96	External Payment Rejections	Payments rejected externally on the bank statement	CSV, TXT, PDF
97	External Collection Rejections	Collections rejected externally on the bank statement	CSV, CSV All CSV With Comments CSV With OrigRef and Comments, TXT, TXT All TXT With Comments TXT With OrigRef and Comments, PDF,
98	Payment Confirmations	Confirmations of payments made	PDF
99	Payment Summary	Summary of payments	PDF
101	Deposits Allocated	Details of deposits allocated	CSV, TXT, PDF
102	Client Statement - Daily	Client statement report	PDF
130	Client Statement - Import	Client statement report for imports	PDF
147	Submitted Transactions: Daily	Transactions submitted daily report	CSV
155	Batch Insurer Bank Split	Reflects summaries and detailed bank statement transactions	XLSX
177	Batch Ledger by Period	Record of all transactions across the Entity per period	CSV

REPORT SCHEDULE

THE FOLLOWING SCHEDULE NOTES WHEN THE XCELERATE REPORT FILES ARE CREATED ON THE XCELERATE SERVER. NOTE THAT PREVIOUSLY REPORTED INFORMATION WILL NOT APPEAR ON SUBSEQUENT REPORTS. IF THERE IS NO DATA TO REPORT, THEN XCELERATE WILL NOT PROVIDE THE REPORT. ANY ADDITIONAL REPORTS OR MISSING REPORTS SHOULD BE REQUESTED FROM YOUR SERVICE CONSULTANT.

Report	Schedule Production/Generation
External collection rejections	These reports are produced everyday between 08h30 and 12h30 depending on the volume of transactions to be corresponded.
Deposits allocated	
Internal collection rejections	These reports are produced every 30 minutes, e.g. 08h30, 9h00, 9h30, 10h00 etc.
Collection Import Summary	

CONFIDENTIAL

XCELERATE REPORT SPECIFICATIONS

Content	File Name	Col	Column Content
Unpaid and Bank Rejected Debit Orders	hhmm ¹ - External Collection Rejections(AAAAA ² – YYYY-MM ³ – YYYY-MMDD ⁴)	1	UI Sequence Number. This is an integer assigned to the debit order file imported into the Xcelerate system.
		2	Transaction Xcelerate Processed Date. This date in the format YYYY-MM-DD represents the date the debit order reversal was processed on the Xcelerate system.
		3	Original Debit Order Action Date. This date in the format YMMDD represents the action date of the original debit order as supplied by you.
		4	The year and month value in the format YYYYMM represents the Xcelerate collection period for which the transaction was processed.
		5	These are the first 30 characters of the of the account holder name supplied in the original debit order which you requested. Where the original account holder name exceeds 30 characters counting from the left, our system will truncate characters from the right.
		6	This is a 6-digit branch code for the account holder's bank.
		7	This is the 11-digit account number as per the original debit order.
		8	This is amount of the original debit order in the decimal format where the decimal value represents cents.
		9	The Bank Transaction Reference as it would appear of the account holder's bank statement.
		10	The bank account type of the original debit order. i.e. Savings, Current, Transmission or Bond.
		11	The reversal code for debit order reversal. Indicates the reason for the reversal. This is an alphanumeric value consisting of 4 characters.
		12	A description of the debit order reversal.
Content	File Name	Col	Column Content
Xcelerate	hhmm ¹ - Internal Collection	1	UI Sequence Number. This is an integer assigned to the debit order file imported in the Xcelerate system.

Collection Rejections produced on import of a collection file	Rejections(AAAAAA ² - YYYY-MM ³ - YYYYMM-DD ⁴ T HH MM SS ⁵)	2	Transaction Xcelerate Processed Date. This date in the format YYYY-MM-DD represents the date the debit order reversal was processed on the Xcelerate system.
		3	Original Debit Order Action Date. This date in the format YYMMDD represents the action date of the original debit order as supplied by you.
		4	The year and month value in the format YYYYMM represents the Xcelerate collection period for which the transaction was processed.
		5	These are the first 30 characters of the of the account holder name supplied in the original debit order which you requested. Where the original account holder name exceeds 30 characters counting from the left, our system will truncate from the right characters.
		6	This is a 6-digit branch code for the account holder's bank.
		7	This is the 11-digit account number as per the original debit order.
		8	This is amount of the original debit order in the decimal format where the decimal value represents cents.
		9	The Bank Transaction Reference as it would appear of the account holder's bank statement.
		10	The bank account type of the original debit order. i.e. Savings, Current, Transmission or Bond.
		11	The rejection code for debit order rejection on the Xcelerate system. Indicates the reason for the reversal. This is an alphanumeric value consisting of 4 characters.
		12	A description of the debit order rejection.

Content	File Name	Col	Column Content
Deposits allocated to your related sub account.	hhmm ¹ - Deposits Allocated(AAAAAA ² - YYYY-MM ³ - YYYY-MMDD ⁴)	1	Your related business' name.
		2	The related sub account's description as per our system.
		3	The date in format YYYY/MM/DD on which the deposit was allocated or deposit was reversed on the Xcelerate system.
		4	The date in format YYYY/MM/DD the deposit was received per QSURE's bank account.
		5	The description of deposit as per QSURE's bank statement.
		6	The value of the deposit reversal when applicable. This value will equal zero when a deposit is allocated.
		7	The value of the deposit allocation when applicable. This value will equal zero when a deposit is reversed.
		8	The collection period in the format YYYY-MM to which the deposit was allocated.
Summary of the Collection files Imported into Xcelerate for the specific sub account per action date in the files processed.	hhmm ¹ - Collections Import Summary(AAAAAA ² - YYYY-MM ³ - YYYY-MM-DD ⁴ T HH MM SS ⁵)	1	UI Sequence Number. This is an integer assigned to the debit order file imported in the Xcelerate system.
		2	The collection period in the format YYYY-MM to which the deposit was allocated.
		3	The date the collection file was uploaded to the Xcelerate system.
		4	The action date of the collection transaction
		5	An integer indicating the number of transactions received.
		6	A decimal value indicating the Rand value of the transactions for the indicated action date.
		7	An integer indicating the number of transactions rejected.
		8	A decimal value indicating the Rand value of the rejected transactions for the indicated action date.
		9	An integer indicating the net number of transactions received to be submitted to the bank for the indicated action date.
		10	A decimal value indicating the Rand value of transactions received to be submitted to the bank for the indicated action date.

REPORT ENDPOINTS

There are 3 Reporting Methods available:

- GetReportsForPreviousBusinessDay
- GetReportsByDate
- DownloadReport

Method	Response Object
GetReportsForPreviousBusinessDay	<pre>{ "message": "Retrieved [Count of] reports.", "success": true, "requestID": [Request ID], "reports": [{ "entityIntegrationFileDataID": [entityIntegrationFileDataID], "reportID": 97, "subAccountCode": "[Xcelerate Sub Account Code]", "subAccountDescription": "[Xcelerate Sub Account Description]", "reportDate": "[Yesterdays Date]", "reportDescription": "[Report Description]", "fileName": "[Repirt File Name].csv", "documentFile": "[File data in base 64 string]" }] }</pre>
GetReportsByDate	<pre>{ "message": "Retrieved [Count of] reports.", "success": true, "requestID": [Request ID], "reports": [{ "entityIntegrationFileDataID": [entityIntegrationFileDataID], "reportID": [Report ID], "subAccountCode": "[Xcelerate Sub Account Code]", "subAccountDescription": "[Xcelerate Sub Account Description]", "reportDate": "[Report Date]", "reportDescription": "[Report Description]", "fileName": "[Repirt File Name].csv",</pre>

	<pre>"documentFile": "[File data in base 64 string]" }] }</pre>
DownloadReportFile	<pre>{ "message": "Retrieved Report File data.", "success": true, "requestID": [RequestID], "base64": "[Base 64 string with file data]", "fileName": "[Report Name].csv", "type": "csv" }</pre>

GETREPORTSFORPREVIOUSBUSINESSDAY METHOD

REQUEST SAMPLE

URL APIUrl /getreportsforpreviousbusinessday?refreshToken=[Refresh Token From the /token request]&fileintegrationuser=[File Integration Username as received from QSURE]		
Method	GET	
Query Parameters	Parameter	Description
	refreshToken	RefreshToken retrieved in the /token request
	fileIntegrationUser	File Integration Username as received from QSURE

REQUEST EXAMPLE

GET	https://QSCollectAPI.qsure.co.za/getreportsforpreviousbusinessday?refreshToken=[Refresh Token From the /token request]&fileintegrationuser=[File Integration Username as received from QSURE]			Send
Params	Authorization	Headers (6)	Body	Pre-request Script
Tests	Settings	Cookies		
	KEY	VALUE	DESCRIPTION	Bulk Edit
☒	refreshToken	[Refresh Token From the /token request]		
☒	fileintegrationuser	[File Integration Username as received from QSURE]		

SUCCESSFUL RESPONSE

If there is data for the previous day:

Property	Value
Response Code	200(OK)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "Retrieved [Count of] reports.", "success": true, "requestID": [Request ID], "reports": [{ "entityIntegrationFileDataID": [entityIntegrationFileDataID], "reportID": 97, "subAccountCode": "[Xcelerate Sub Account Code]", "subAccountDescription": "[Xcelerate Sub Account Description]", "reportDate": "[Yesterdays Date]", "reportDescription": "[Report Description]", "fileName": "[Repirt File Name].csv", "documentFile": "[File data in base 64 string]" }] }</pre>

FAILED RESPONSE

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["refresh_token fa484..[omitted]...7b4a is not Valid"] } }</pre>

	<pre>] } } </pre>
Reason For Failure	The refreshtoken used in the request is invalid.
Resolution	Make the /token endpoint again and use the correct refreshtoken value from the authentication request.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "reportErrors": ["There are no reports for the selected date: 01-05-2023"] } } </pre>
Reason For Failure	There are no reports for the previous business day
Resolution	Confirm that there were transactions processed on the day. Alternatively, if this call is made before 11:00AM there won't yet be reports generated for the previous day. Please see the Report Schedule section.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" The User associated with the refresh_token does not have any Access Agreements."] } } </pre>

	<pre>] } } </pre>
Reason For Failure	The user account you have used to make the authentication request does not have access to any agreements on the Xcelerate System.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" file_integration_user [file_integration_user] does not exist"] } } </pre>
Reason For Failure	The File Integration Username that you are using does not exist.
Resolution	Check that you are using the File Integration Username specified by QSURE. If you are, then Contact QSURE (PTY) LTD to resolve the issue.

GETREPORTSBYDATE METHOD

REQUEST SAMPLE

URL	APIUrl/getreportsbydate?refreshToken=[Refresh Token From the /token request]&fileintegrationuser=[File Integration Username as received from QSURE]&reportdate=[Historic Report Date]&reportid=[Report ID]	
Method	GET	
Query Parameters	Parameter	Description
	refreshToken	RefreshToken retrieved in the /token request
	fileIntegrationUser	File Integration Username as received from QSURE
	reportDate	Historic date to retrieve reports for that specific day. Preferred Format : yyyy-MM-dd
	reportid	Report ID of the individual report that you would like to request

REQUEST EXAMPLE

GET	https://QSCollectAPI.qsure.co.za//getreportsbydate?refreshToken=[Refresh Token From the /token request]&fileintegrationuser=[File Integration Username as received from QSURE]&reportdate=[Historic Report Date]&reportid=[Report ID]		Send
Params	Authorization	Headers (8)	Body
Pre-request Script	Tests	Settings	Cookies
Query Params			
KEY	VALUE	DESCRIPTION	Bulk Edit
☒ refreshToken	[Refresh Token From the /token request]		
☒ fileintegrationuser	[File Integration Username as received from QSURE]		
☒ reportdate	[Historic Report Date]		
☒ reportid	[Report ID]		

SUCCESSFUL RESPONSE

Property	Value
Response Code	200(OK)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "Retrieved [Count of] reports.", "success": true, "requestID": [Request ID], "reports": [{</pre>

```

    "entityIntegrationFileDataID": [entityIntegrationFileDataID],
    "reportID": [Report ID],
    "subAccountCode": "[Xcelerate Sub Account Code]",
    "subAccountDescription": "[Xcelerate Sub Account Description]",
    "reportDate": "[Report Date]",
    "reportDescription": "[Report Description]",
    "fileName": "[Repirt File Name].csv",
    "documentFile": "[File data in base 64 string]"
  }
}

```

FAILED RESPONSE

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": ["refresh_token fa484..[omitted]...7b4a is not Valid"] } } </pre>
Reason For Failure	The refreshtoken used in the request is invalid.
Resolution	Make the /token endpoint again and use the correct refreshtoken value from the authentication request.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": [" file_integration_user [file_integration_user] does not exist"] } }</pre>
Reason For Failure	The File Integration Username that you are using does not exist.
Resolution	Check that you are using the File Integration Username specified by QSURE. If you are, then Contact QSURE (PTY) LTD to resolve the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "reportErrors": ["There are no reports for the selected date: 25-12-2022"] } }</pre>
Reason For Failure	There are no reports for the selected historic date.
Resolution	There were no reports generated for the requested date. This is most likely due to there being no transactions processed on the requested date.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["The User associated with the refresh_token does not have any Access Agreements."] } }</pre>
Reason For Failure	The user account you have used to make the authentication request does not have access to any agreements on the Xcelerate System.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["No reports found for provided report ID"] } }</pre>
Reason For Failure	There is no matching reports for the report id provided.
Resolution	Use a valid Report ID as per the Available Reports Report ID for the report required.

DOWNLOADREPORTFILE METHOD

REQUEST SAMPLE

URL	<u>APIUrl</u>/downloadreportfile?refreshToken={{refreshToken}}&entityIntegrationFileDataID=[entityIntegrationFileDataID of the Report Item From GetReportsByDate / GetReportsForPreviousBusinessDay]	
Method	GET	
Query Parameters	Parameter	Description
	refreshToken	RefreshToken retrieved in the /token request
	entityIntegrationFileDataID	entityIntegrationFileDataID of the Report Item From GetReportsByDate / GetReportsForPreviousBusinessDay

REQUEST EXAMPLE

GET

https://QSCollectAPI.qsure.co.za/downloadreportfile?refreshToken={{refreshToken}}&entityIntegrationFileDataID=[entityIntegrationFileDataID of the Report Item From GetReportsByDate / GetReportsForPreviousBusinessDay]

Params

Authorization

Headers (6)

Body

Pre-request Script

Tests

Settings

Query Params

KEY	VALUE	DESCRIPTION
☒ refreshToken	{{refreshToken}}	
☒ entityIntegrationFileDataID	[entityIntegrationFileDataID of the Report Item From GetReportsByDa	
Key	Value	Description

SUCCESSFUL RESPONSE

Property	Value
Response Code	200 (OK)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "Retrieved Report File data.", "success": true, "requestID": 273, "base64": "[Base 64 string with file data]", "fileName": "[Report Name].csv", "type": "csv" }</pre>
Information	The response will contain the file data in base64 format in the base64 field. The file type will be returned in the type field. The filename will be returned in the filename field. The filename is as follows: [Report Name]([Sub Account Unique Code as per Xcelerate] – [Period Date From(yyyy-MM) – [Period Date To(yyyy-MM-dd)].[File Type] Examples: • External Collection Rejections(ABCDE- 2022-11 - 2022-12-21).csv • External Collection Rejections(ABCDE- 2022-11 - 2022-12-21).txt • External Collection Rejections(ABCDE- 2022-11 - 2022-12-21).pdf

FAILED RESPONSE

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre>{ "message": "The request is invalid.", "modelState": { "": ["refresh_token fa..[omitted]...7b4a is not Valid"] } }</pre>

	<pre>] } } </pre>
Reason For Failure	The refreshtoken used in the request is invalid.
Resolution	Make the /token endpoint again and use the correct refreshtoken value from the authentication request.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [No Data Found for the EIFD ID : {entityIntegrationFileDataID}."] } } </pre>
Reason For Failure	The entityIntegrationFileDataID you have provided is not valid
Resolution	Make sure that you are using the correct entityIntegrationFileDataID returned by the GetReportsByDate/GetReportsForPreviousBusinessDay response.

Property	Value
Response Code	400 (Bad request)
Content-Type	Content-Type: application/json
Content	<pre> { "message": "The request is invalid.", "modelState": { "": [" The User associated with the refresh_token does not have any Access Agreements."] } } </pre>

	<pre>] } }</pre>
Reason For Failure	The user account you have used to make the authentication request does not have access to any agreements on the Xcelerate System.
Resolution	Contact QSURE (PTY) LTD to rectify the issue.

CONFIDENTIAL