


# codee sans mono

a monospaced font for programming

`@font-face{ font-family: codee; }`


type

a font designed for coding in a world of retina displays. inspired by the greats such as panic, consolas, inconsolata and ubuntu mono. codee sansmono features a highly legible glyph collection for use in code editors, particularly dark themed colors and light text on dark backgrounds. codee also features oversized punctuation for easy to read syntaxes and low-fatigue proofing.

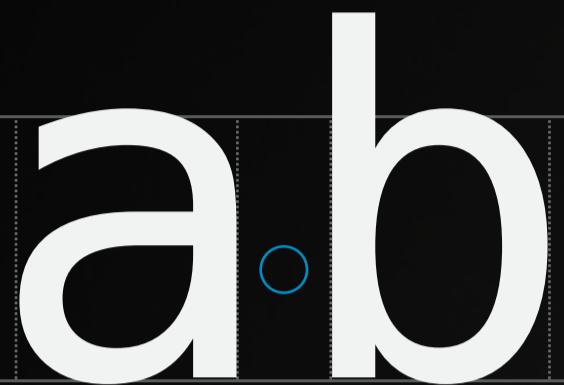

ab

panic  
sans

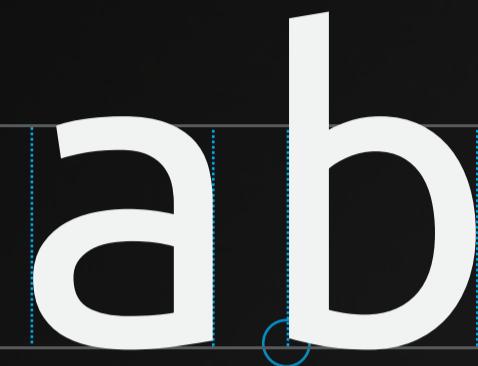

ab

ubuntu  
sans mono



ab

incon  
solata



ab

consolas



ab

codee  
sans mono

codee  
sans mono

a b c d e f g h i j k l m

n o p q r s t u v w x y z

- -- , . ; " / ! ? < = >

[ ] { } ( ) @

a  
g

500

abcdefghijklm  
abcdefghijklmn  
abcdefghijklmnopq  
abcdefghijklmnopqrs  
abcdefghijklmnopqrstuv  
abcdefghijklmnopqrstuvwxyz -  
abcdefghijklmnopqrstuvwxyz---,.;"!?  
abcdefghijklmnopqrstuvwxyz---,.;"!?  
abcdefghijklmnopqrstuvwxyz---,.;"!?<  
abcdefghijklmnopqrstuvwxyz---,.;"!?<=>\_[]  
abcdefghijklmnopqrstuvwxyz---,.;"!?<=>\_[]  
abcdefghijklmnopqrstuvwxyz---,.;"!?<=>\_{}()@

144

96

72

60

48

36

24

21

18

14

12

9

large  
punctuation.

```
def typedesign
  @typedesign | |= student.typedesign.find(:all,
    :conditions => conditions,
    :order => "taught_by ross")
end
```

```
<!DOCTYPE html>
<html>
<head>
  <meta http-equiv="content-type" content="text/html; charset=utf-8">
  <title>The Internet!</title>

  <link rel="stylesheet" href="style.css" type="text/css" media="screen">
  <!-- <link rel="icon" type="image/x-icon" href=".favicon.png"> -->

  <script src="js/jquery-1.6.4.min.js" type="text/javascript" charset="utf-8"></script>
  <script src="js/jquery.scrollTo-1.4.2.min.js" type="text/javascript" charset="utf-8"></script>
  <script src="js/functions.js" type="text/javascript" charset="utf-8"></script>

  <script type="text/javascript" src="http://use.typekit.com/fk15nnpn.js"></script>
  <script type="text/javascript">try{typekit.load();}catch(e){}</script>
</head>
<body>

  <ul id="nav">
    <li><a href="#" class="prev">&uarr;</a></li>
    <li><a href="#" class="next">&darr;</a></li>
  </ul>

  <ul id="slideshow">

    <!-- slide -->
    <li class="slide">
      <div class="wrapper">
        <div class="valign">
          <p>but what is the turtle standing on?</p>
          <p>it's cats. cats all the way down. cats. cats. cats.</p>
        </div>
      </div>
    </li>
  </ul>

</body>
</html>
```

```
<!DOCTYPE html>
<html>
<head>
  <meta http-equiv="content-type" content="text/html; charset=utf-8">
  <title>The Internet!</title>

  <link rel="stylesheet" href="style.css" type="text/css" media="screen">
  <!-- <link rel="icon" type="image/x-icon" href=".favicon.png"> -->

  <script src="js/jquery-1.6.4.min.js" type="text/javascript" charset="utf-8"></script>
  <script src="js/jquery.scrollTo-1.4.2.min.js" type="text/javascript" charset="utf-8"></script>
  <script src="js/functions.js" type="text/javascript" charset="utf-8"></script>

  <script type="text/javascript" src="http://use.typekit.com/fk15nnpn.js"></script>
  <script type="text/javascript">try{typekit.load();}catch(e){}</script>
</head>
<body>

  <ul id="nav">
    <li><a href="#" class="prev">&uarr;</a></li>
    <li><a href="#" class="next">&darr;</a></li>
  </ul>

  <ul id="slideshow">

    <!-- slide -->
    <li class="slide">
      <div class="wrapper">
        <div class="valign">
          <p>but what is the turtle standing on?</p>
          <p>it's cats. cats all the way down. cats. cats. cats.</p>
        </div>
      </div>
    </li>
  </ul>

</body>
</html>
```

an lacinia  
nulla sed  
tur. Fusce  
telius ac  
odo, tortor  
mentum  
enitatis.

# codee sans mono

```
a .new .programming .font {  
    coming: soon;  
}
```