ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE 125.8 For on ground CTC with ML CEN, use FREQ 120.3

RADIO NAVIGATION AND LANDING AIDS

NDB	MTG	266	374509.2S	1404644.5E	Range 75 (HN 75)	(1)
VOR	MTG	117.0	374505.0S	1404707.0E		

(1) Range 50 in sector 110-140.

LOCAL TRAFFIC REGULATIONS

1. GA area and TWY A1, A2, C (sealed) and D not AVBL to ACFT ABV 5,700KG.
2. During fire season when CFS Airbase is active, light ACFT PRKG and tie down area is adjacent to the primary WDI marked with yellow cones.

CTAF - AFRU 126.65

ADDITIONAL INFORMATION

1. Bird hazard exists.
2. Weather balloon launch MON and THU APRX 2315 UTC FM 1KM W ARP. Launches may occur at other times.

CHARTS RELATED TO THE AERODROME

1. WAC 3469.
2. Also refer to AIP Departure and Approach Procedures.

MOUNT GORDON — ELEV 900

AVFAX CODE 4321



QLD UTC +10 YGON
194619S 1392404E VAR 5 DEG E CERT

AD OPR Capricorn Copper Pty Ltd, Level 3, 232 Adelaide Street, Brisbane, QLD, 4000. PO Box 1933, Milton LPO, QLD, 4064. Email: cco.dl.cro@29metals.com. PH AD Manager (on site) 0488 772 930 or 07 4748 9998. PH 07 3145 0160.

REMARKS

Private AD. PPR for all OPS H24.

APRONS AND TAXIWAYS

TWY A - Code C, WID 15M, asphalt sealed.

AERODROME OBSTACLES

1. MIOL on terrain:
   a. 1,073FT AMSL, BRG 3.57 DEG MAG 0.27NM FM the ARP. Infringes inner HZS by 54FT.
   b. 904FT AMSL 1,694M SOT, 37M R of CL and 50FT AGL at 3.3% TKOF GRAD FM RWY 08.
2. Terrain varies up to:
   a. 1,190FT AMSL BTN BRG 252 to 292 DEG MAG, and BTN 1.0 to 1.5NM FM the ARP. Infringes the inner HZS up to 171FT.
   b. 1,160FT AMSL BTN BRG 343 to 10 DEG MAG, and BTN 0.9 to 1.3NM FM the ARP. Infringes the inner HZS up to 141FT.
3. Terrain:
   a. 1,170FT AMSL 3,388M SOT, 132M L of CL and 276FT AGL at 3.9% TKOF GRAD FM RWY 26.
   b. 1,180FT AMSL BRG 323.6 DEG MAG 0.72NM FM the ARP. Infringes the inner HZS up to 161FT.
   c. 1,072FT AMSL BRG 15.1 DEG MAG 0.48NM FM the ARP. Infringes the inner HZS up to 53FT.
4. Transmission TWR 1,030FT AMSL 147M L of RCL 2,417M FM SOT 3.53% TKOF GRAD FM RWY 26.
5. Power line 1,004FT AMSL 71M L of RCL 2,404M FM SOT 2.92% TKOF GRAD FM RWY 26.

PHYSICAL CHARACTERISTICS
08/26 085 38a Unrated. Central 18M of WID sealed. WID 30 RWS 80
RWY WID will revert to 18M when soft wet SFC NOTAM is current. RWY AVBL to ACFT approved for 18M OPS.

AERODROME AND APPROACH LIGHTING
RWY 08/26 LIRL(1)
(1) MED EMERG and PPR use only.

ATS AND AERODROME COMMUNICATION FACILITIES
FIA BRISBANE CENTRE 122.4

CTAF 126.7

ADDITIONAL INFORMATION
Wildlife hazard exists.

CHARTS RELATED TO THE AERODROME
WAC 3220.

MOUNT HOLLAND ELEV 1462

AVFAX CODE 6315
WA UTC +8 YMHL
320630S 1194536E VAR 0 DEG W CERT
AD OPR Covalent Lithium Pty Ltd, L3, 109 St Georges Tce, Perth, WA, 6000.
Email: mth.aerodrome@covalentlithium.com. PH Site Contact: 08 9230 5400. ARO or AD MGR 0437 721 944 (H24). Website: www.covalentlithium.com.

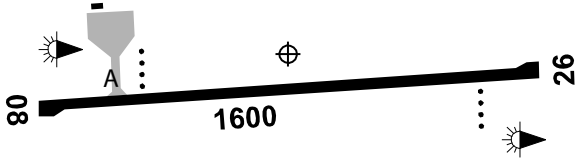

REMARKS
Restricted Operations. PPR from AD MGR/ARO.

HANDLING SERVICES AND FACILITIES
Marshalling, parking allocation and ground handling services by prior arrangement with AD MGR.

APRONS AND TAXIWAYS
TWY A - Code C, WID 23M Bitumen - unrated.

AERODROME OBSTACLES
1. Lit tower 1,622FT AMSL BRG 51 DEG MAG 0.51NM FM ARP. Infringes inner HZS by 23FT.
2. Unlit tower, 1,777FT AMSL BRG 345.7 DEG MAG 1.58NM FM ARP. Infringes inner HZS by 177FT.
3. Power pole, 1,623FT AMSL BRG 279 DEG MAG 1.15NM FM ARP. Infringes inner HZS by 23FT.
4. Waste Rock Landform, 1,630FT AMSL 320610.0S 1194501.0E. Infringes inner HZS by 30FT.

PHYSICAL CHARACTERISTICS
08/26 085 52a PCR 200/F/D/Y/T WID 30 RWS 140

AERODROME AND APPROACH LIGHTING
RWY 08/26 LIRL AFRU+PAL 126.4
RWY 08/26 PAPI(1) AFRU+PAL 126.4 3.0 DEG40.4FT
(1) Left side.
Backup generator power available to main aerodrome lighting system via manual transfer. Allow 5 MIN for transfer.

OTHER LIGHTING
TWY LGT: Blue edge.

Information may be continued on the next page: PTO