


On this page

About REST API (old)

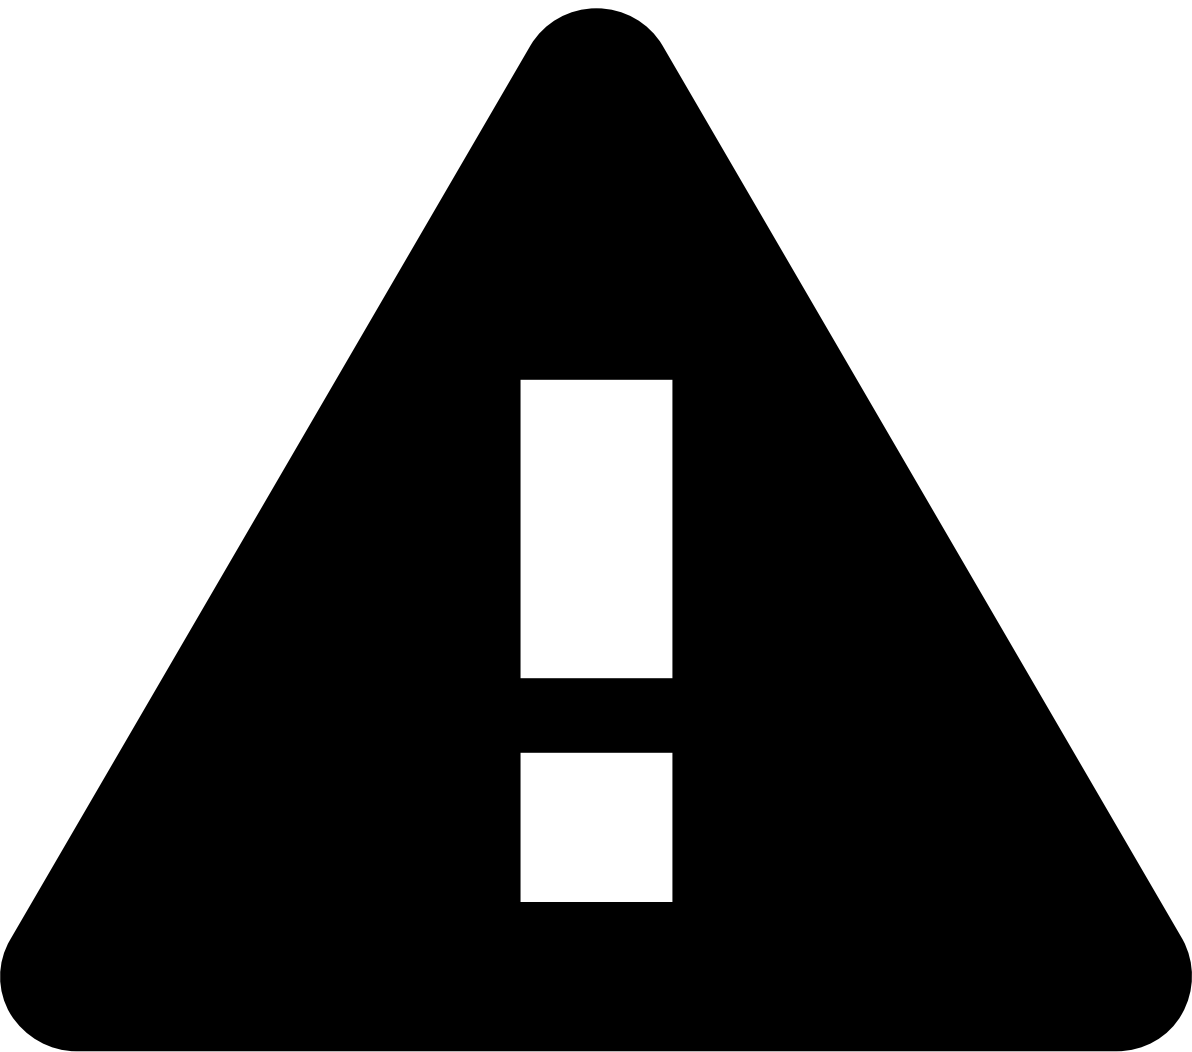

Deprecated API specification

Case Manager is currently moving to an API specification generated with Swagger. Due to Case Manager's API size and complexity, the resources are being gradually moved to the new format. Until this transition is complete, please make sure that you check both this page and the [new API specification](#).

When all resources are moved to the new format, this page will be deleted.

Endpoints

Resource	Method	Endpoint	Description
System	GET		Gets the version inf

		/api/version	
Configuration	GET	/api/configuration/<id>	Get the Configuration
	GET	/api/configuration?<pagination parameters>	Get a paginated list
	GET	/api/configuration/tree	Get all the Configur
	GET	/api/configuration/suggestions	Gets all the suggest
	GET	/api/configuration/core	Get the core configu
	GET	/api/configuration/rules-block	Get the configuration
Language	GET	/api/language/<id>	Get the Language m
	GET	/api/language?<pagination parameters>	Get a paginated list
Language Message	GET	/api/language-message/<language>	Get a comprehensiv
Message	GET	/api/message/<id>	Get the Message m
	GET	/api/message?<pagination parameters>	Get a paginated list
Data Entity	GET	/api/dataentity/<id>	Get the Data Entity
	GET	/api/dataentity?<pagination parameters>	Get a paginated list
Data Source	GET	/api/datasource/<id>	Get the Data Source
	GET	/api/datasource?<pagination parameters>	Get a paginated list
Session	GET	/api/session	Get the session of t
	POST	/api/session	Login the user in th
	POST	/api/session/generate-config	Generates a 2FA co
	POST	/api/session/validate-config	Validates the user 2

	POST	/api/session/reset-config	Resets the user 2FA
	POST	/api/session/replace-config	Replaces the user 2FA
	PUT	/api/session	Change the user's p
	PUT	/api/session/restore	Restore the user's e
	DELETE	/api/session	Logout the user from
	POST	/api/session/request-password-reset	Request password r
	POST	/api/session/validate-password-reset	Validate password r
	POST	/api/session/confirm-password-reset	Confirm password r
Event	GET	/api/event/<id>	Get the Event match
	GET	/api/event?<pagination parameters>	Get a paginated list
	GET	/api/event/review/next	Gets the next event
	GET	/api/event/review/current	Gets the current eve
	GET	/api/event/<id>/linked?<pagination parameters>	Get a paginated list
Event Status	POST	/api/event-status	Change the Status
Event User	POST	/api/event-user	Assign a set of Even
Event Queue	POST	/api/event-queue	Move a set of Event
Event Note	POST	/api/event-note	Add a Note to a set
Event Pos/Neg	POST	/api/event-posneg	Edit a Block/Allow L
	POST	/api/event-posneg/bulk	Bulk edit Block/Allow
Event Export	POST	/api/event-report	Download a file-bas

	POST	/api/event-report/readonly	Download a file-based
Event Visibility	POST	/api/event-visibility/	Set the access group
Case	GET	/api/case/<id>?timestamp=<timestamp>	Get a case match
	GET	/api/case?<pagination parameters>	Get a paginated list
	POST	/api/case	Create a new case.
	PUT	/api/case/<id>?timestamp=<ts>	Update a case match
	GET	/api/case/review/next	Gets the next case
	GET	/api/case/review/current	Gets the next case
	GET	/api/case/case-types	Gets the list of avail
	GET	/api/case/source-type	Gets the list of avail
	POST	/api/case/export	Download a file-based
Case Event	POST	/api/event-case	Add events to already
	DELETE	/api/event-case	Delete associations
Case Note	GET	/api/case-note/<case-id>?<pagination-parameters>/pre>	Retrieve case notes
	POST	Add note to existing cases.	Add note to existing
	DELETE	/api/case-note/<note-id>	Delete a case note.
Note Type	GET	/api/note-type	List all configured n
Case User	POST	/api/case-user	Assign user to exist
Case Queue	POST	/api/case-queue	Move existing cases
Case State	POST		Change state of giv

		/api/case-state	
Report	GET	/api/report/<id>	Get the Report matching
	GET	/api/report?<pagination parameters>	Get a paginated list of Reports
	POST	/api/report	Create a new Report
	DELETE	/api/report/<id>	Delete a Report matching
Report Template	GET	/api/report-template/<id>	Get the Report Template
	GET	/api/report-template?<pagination parameters>	Get a paginated list of Report Templates
	POST	/api/report-template	Create a new Report Template
	PUT	/api/report-template/<id>	Update the report template
	DELETE	/api/report-template/<id>	Delete the report template
File	GET	/api/file/<id>?<alt>	Get the File matching
	POST	/api/file	Create a new File.
Local	GET	/api/locale/<id>	Get the Local matching
	GET	/api/locale?<pagination parameters>	Get a paginated list of Locals
Timezone	GET	/api/timezone/<id>	Get the Timezone matching
	GET	/api/timezone?<pagination parameters>	Get a paginated list of Timezones
Tokenizer	GET	/tokenizer/reveal?<params>	Reveals the plain text
	GET	/tokenizer/reveal/all	Reveals a list of encoded
Dashboard Ticket	GET	/api/dashboard/<dashboard-id>/ticket	Get a trusted ticket
Pulse Application	GET	/api/pulse-app/state	Get the state of the

	GET	/api/pulse-app/status	Get the status of the
	GET	/api/pulse-app/lists	Get the lists that are
Self-Service Rules	GET	/api/ssr?<context parameters>	Get a list of Self-Service
	GET	/api/ssr/<id>?<context parameters>	Get the Self-Service
	POST	/api/ssr?<context parameters>	Create a new Self-Service
	PUT	/api/ssr/<id>?<context parameters>	Update the Self-Service
	DELETE	/api/ssr/<id>?<context parameters>	Delete the Self-Service
	GET	/api/ssr/metadata?<context parameters>	Get the Self-Service
	POST	/api/ssr/publish?<context parameters>	Publish the Self-Service
	POST	/api/ssr/validate?<context parameters>	Validate a Self-Service
	GET	/api/ssr/status?channelId=<CHANNEL_ID>	Get the current status
Self-Service Rules Testing	POST	/api/ssr-testing/<target-id>?channelId=<CHANNEL_ID>	Create a self-service
	GET	/api/ssr-testing/<target-id>/latest?channelId=<CHANNEL_ID>	Get the last self-service
Custom Entity Export	POST	/api/entity/<entityName>/export	Download a file-based
Custom Extensions	POST	/api/extension/action	Synchronously execute
	POST	/api/async-action/submit	Submit the asynchronous
	GET	/api/async-action/check	Gets the status of the
Status	GET	/api/status/<id>	Get the Status match
	GET	/api/status?<pagination parameters>	Get a paginated list
Status Reason	GET	/api/status-reason/<id>	Get the Status Reason

	GET	/api/status-reason?<pagination parameters>	Get a paginated list
User	GET	/api/user/<id>	Get the User match
	GET	/api/user?<pagination parameters>	Get a paginated list
Queue	GET	/api/queue/<id>	Get the Queue match
	GET	/api/queue?<pagination parameters>	Get a paginated list
	POST	/api/queue	Create a new Queue
	PUT	/api/queue/<id>	Update the Queue m
	DELETE	/api/queue/<id>	Delete the Queue m
Queue User	GET	/api/queue-user/user-queues	Get the queues to w
Automation	GET	/api/automation/<id>	Get the Automation
	GET	/api/automation?<pagination parameters>	Get a paginated list
	POST	/api/automation	Create a new Automon
	PUT	/api/automation/<id>	Update the Automati
	DELETE	/api/automation/<id>	Delete the Automati
	PATCH	/api/automation/<id>	Change the table po
SLA	GET	/api/sla/<id>	Get the SLA matchi
	GET	/api/sla?<pagination parameters>	Get a paginated list
	POST	/api/sla	Create a new SLA.
	PUT	/api/sla/<id>	Update the SLA ma
	DELETE	/api/sla/<id>	Delete the SLA mat

List	GET	/api/list	List available user li
	GET	/api/list/event-lists	Retrieve the availab
	GET	/api/list/search	Search in which lists
	POST	/api/list/update	Execute a bulk upda
	POST	/api/list/update-entities	Execute a manual b
	GET	/api/list/audit	Retrieve audit inform
Channel	GET	/api/channel	List all channels cor
	GET	/api/channel/{id}	List the details of th
Group	GET	/api/group/list	List all access group
	GET	/api/select/<id>	Get a selectable mo
	GET	/api/detail/<id>	Get the group match

Pagination📄

In order to specify how pagination should be generated, consider the following URL attributes:

limit	The number of results per page, defaulting to 10.	GET /api/event?limit=10 GET /api/event?limit=25
offset	The index of the first entry in the page, defaulting to 0.	GET /api/event?limit=10&offset=90 GET /api/event?limit=10&offset=100
orderby	The field and direction to sort results. Consists on "<field> <direction>", where direction may be "asc" or "desc". Direction defaults to "asc".	GET /api/event?orderby=timestamp GET /api/event?orderby=timestamp asc GET /api/event?orderby=merchant_id desc
filter	The expression(s) to filter results. Currently an expression consists on "<field> <op> <value>". The operation may be "eq", "neq", "gt", "lt", "gteq" and "lteq".	GET /api/event?filter='timestamp' gt 1000 GET /api/event?filter=('mcc' eq '9072') GET /api/event?filter='timestamp' gt '1000' AND 'mcc' eq '9072'

	Multiple expressions can be checked using a comma as separator.	
--	---	--

Access each of the following pages for more information regarding the respective REST API:

- [Core Configuration](#)
- [Authentication](#)
- [Runtime](#)
- [CRUD Metadata](#)