


On this page

CRUD Metadata

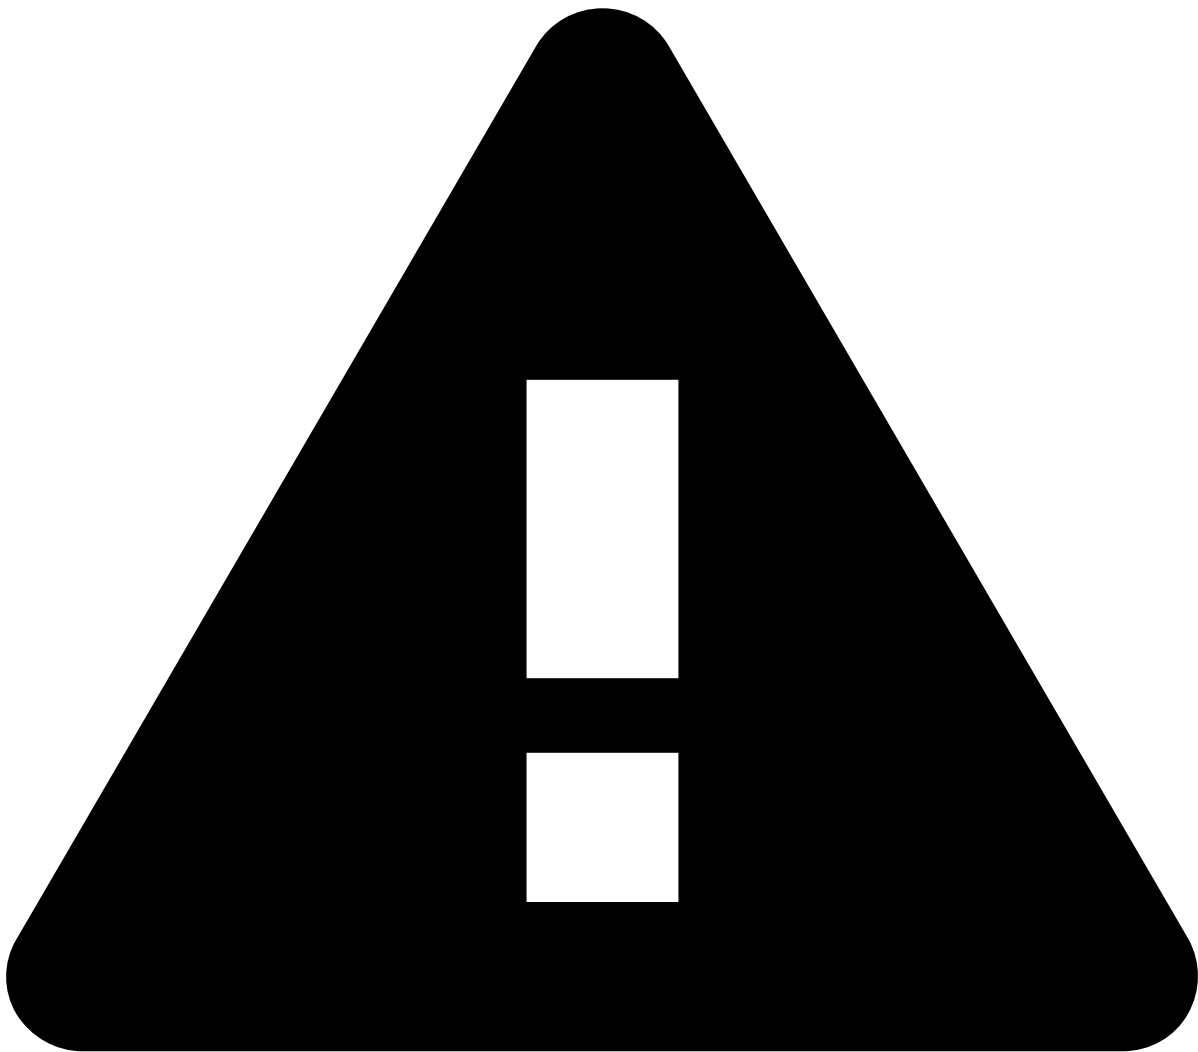

Deprecated API specification

Case Manager is currently moving to an API specification generated with Swagger. Due to Case Manager's API size and complexity, the resources are being gradually moved to the new format. Until this transition is complete, please make sure that you check both this page and the [new API specification](#).

When all resources are moved to the new format, this page will be deleted.

This page details the REST API regarding CRUD Metadata.

CRUD Metadata

Status

Get the Status matching the given ID

Request

GET	/api/status/<id>	--	--	Status as a JSON object	Get the Status matching the given ID
-----	------------------	----	----	-------------------------	--------------------------------------

Example

Request	/api/status/fraud
Response	HTTP 200 <pre>{ "value": "fraud", "label": "event.status.fraud" }</pre>

Get a paginated list of Status

Request

GET	/api/status?<pagination parameters>	--	Pagination	A paginated list of Event Status	Get a paginated list of Evebt Status
-----	-------------------------------------	----	------------	----------------------------------	--------------------------------------

Example

Request	/api/status?limit=10&offset=0
Response	HTTP 200 <pre>{ "items": [{ "value": "unknown", "label": "event.status.unknown" }, { "value": "fraud", "label": "event.status.fraud" }, { "value": "genuine", "label": "event.status.genuine" }]</pre>

	<pre> }, { "value": "none", "label": "event.status.none" }], "total": 4, "limit": 10, "offset": 0, "filter": null, "orderBy": null }</pre>
--	--

Status Reason🔗🔗

Get the Status Reason matching the given ID

Request

GET	/api/status-reason/<id>	-- --	Status Reason as a JSON object	Get the Status Reason matching the given ID
-----	-------------------------	-------	--------------------------------	---

Example

Request	/api/status-reason/975c5ab6-bd2f-4567*-8ae3-6026742f4036
Response	HTTP 200🔗 <pre>{ id: "975c5ab6-bd2f-4567-8ae3-6026742f4036", statusId: "fraud", name: "Confirmed Fraud" }</pre>

Get a paginated list of Status Reasons

Request

GET	/api/status-reason? <pagination parameters>	--	Pagination	A paginated list of Status Reasons	Get a paginated list of Status Reasons
-----	--	----	------------	------------------------------------	--

Example

Request	/api/status-reason?limit=10&offset=0
Response	

HTTP 200

```
{

  "items": [{

    "id": "975c5ab6-bd2f-4567-8ae3-6026742f4036",

    "statusId": "fraud",

    "name": "Confirmed Fraud"

  }, {

    "id": "a70cddca-8499-46d3-a167-3e938a564508",

    "statusId": "fraud",

    "name": "Customer Request"

  }, {

    "id": "f9ab011c-adb7-46a9-b355-3f2e120c50e0",

    "statusId": "fraud",

    "name": "Limit Abuse"

  }, {

    "id": "ab678a03-99b5-4d2e-8374-66ad619c0719",

    "statusId": "fraud",

    "name": "No Response"

  }, {

    "id": "26e900f5-1d07-4eba-94d5-bed72ba7306a",

    "statusId": "fraud",

    "name": "Reshipper"

  }, {

    "id": "5e7f91a1-dcfc-47a7-ab69-86819a75b411",

    "statusId": "fraud",

    "name": "Suspected Fraud"

  }, {

    "id": "2b5ce7b3-b60f-4277-8bc5-c0961099976e",

    "statusId": "fraud",

    "name": "Swoosh Acct Suspended"

  }, {

    "id": "7fa67a7c-cd03-47ac-a6af-7bc7457ec9aa",
```

```

        "statusId": "fraud",

        "name": "Swoosh Employee Abuse"

    }, {

        "id": "a2136f27-66fc-47c2-8498-2e2d8491bf09",

        "statusId": "fraud",

        "name": "Swoosh Family Abuse"

    }, {

        "id": "14938f62-536f-4e76-b488-61832a97ea93",

        "statusId": "genuine",

        "name": "Bulk Ship"

    }],

    "total": 17,

    "limit": 10,

    "offset": 0,

    "filter": null,

    "orderBy": null

}

```

User

Get the User matching the given ID

Request

GET	/api/user/<id>	--	--	User as a JSON object	Get the User matching the given ID
-----	----------------	----	----	-----------------------	------------------------------------

Example

Request	/api/user/835260333
Response	HTTP 200 <pre> { "value": "835260333", "label": "manager" } </pre>

Get a paginated list of Users

Request

GET	/api/user? <pagination parameters>[? channelId=chan nel]	--	Pagination and whether to include inactive users. Also, optional channelId to grant user read-write permissions to that channel	A paginated list of Users which may include inactive users	Get a paginated list of Users with the possibility of including inactive users
-----	--	----	---	--	--

If you are using CM 8.1, please keep in mind that listing inactive users is only available since 8.1.1.

Example

Request	/api/user?limit=10&offset=0
Response	HTTP 200 { "items": [{ "value": "1770275927", "label": "investigator", "active": "true" }, { "value": "835260333", "label": "manager", "active": "true" }, { "value": "696465287", "label": "riskofficer", "active": "true" }, { "value": "107027353", "label": "pulse", "active": "true" }, { "value": "864330622", "label": "analyst", "active": "true" }], }

	<pre> "total": 5, "limit": 10, "offset": 0, "filter": null, "orderBy": null }</pre>
Request	<code>/api/user?limit=10&offset=0&listInactive=true</code>
Response	HTTP 200 <pre>{ "items": [{ "value": "1770275927", "label": "investigator", "active": "true" }, { "value": "835260333", "label": "manager", "active": "true" }, { "value": "696465287", "label": "riskofficer", "active": "true" }, { "value": "295729012", "label": "inactiveuser", "active": "false" }, { "value": "107027353", "label": "pulse", "active": "true" }, {</pre>

	<pre> "value": "864330622", "label": "analyst", "active": "true" }], "total": 6, "limit": 10, "offset": 0, "filter": nul, "orderBy": null }</pre>
--	---

Queue📖

Get the Queue matching the given ID

Request

GET	/api/queue/<id>	--	--	The Queue as a JSON object	Get the Queue matching the given ID
-----	-----------------	----	----	----------------------------	-------------------------------------

Example

Request	/api/queue/4ca173fb-c556-4e52*-8c80-4d6be164ab76
Response	HTTP 200 <pre>{ "id": "4ca173fb-c556-4e52-8c80-4d6be164ab76", "createdAt": 1507892812964, "createdBy": "107027353", "createdByUsername": "pulse", "updatedAt": 1507898055126, "updatedBy": "107027353", "deletedAt": null, "deletedBy": null, "name": "Queue", "description": "Queue description", "channel": , }</pre>

	<pre>"tenant": "NPC", "users": [{ "id": "77505", "username": "NPC", "tenants": { "oo9_B0JZ5HrRonpCoeRBig": "NPC" } }], "deleted": false }</pre>
--	--

Get a paginated list of Queues

Request

GET	<code>/api/queue?<pagination parameters> & [channelPermissionLevel=level]</code>	--	Pagination and optional channel-permission level to filter the queues according to the user access-level (read-write, read-only, none)	A paginated list of Queues	Get a paginated list of Queues
-----	--	----	--	----------------------------	--------------------------------

Example

Request	<code>/api/queue?limit=10&offset=0</code>
Response	HTTP 200 <pre>{ "items": [{ "id": "34531409-07db-456e-9e56-1b08919e1a5a", "createdAt": null, "createdBy": null, "createdByUsername": null, "updatedAt": null, "updatedBy": null, "deletedAt": null, "deletedBy": null, }] }</pre>

```
"name": "Merchant",
"description": null,
"channel": ,
"tenant": null,
"users": [],
"deleted": false
},
{
  "id": "aa89cb7c-c80e-4783-a6f3-1152f359cd3a",
  "createdAt": null,
  "createdBy": null,
  "createdByUsername": null,
  "updatedAt": null,
  "updatedBy": null,
  "deletedAt": null,
  "deletedBy": null,
  "name": "Customer",
  "description": null,
  "channel": ,
  "tenant": null,
  "users": [],
  "deleted": false
},
{
  "id": "9b60b451-c756-45ab-a703-93a68d9d9550",
  "createdAt": null,
  "createdBy": null,
  "createdByUsername": null,
  "updatedAt": null,
  "updatedBy": null,
  "deletedAt": null,
  "deletedBy": null,
```

```
"name": "Investigation",

"description": null,

"channel": ,

"tenant": null,

"users": [],

"deleted": false

},

{

  "id": "d762698a-3cee-469f-a8a7-6a337bd33c86",

  "createdAt": null,

  "createdBy": null,

  "createdByUsername": null,

  "updatedAt": null,

  "updatedBy": null,

  "deletedAt": null,

  "deletedBy": null,

  "name": "Urgent",

  "description": null,

  "channel": ,

  "tenant": null,

  "users": [],

  "deleted": false

},

{

  "id": "4ca173fb-c556-4e52-8c80-4d6be164ab76",

  "createdAt": 1507892812964,

  "createdBy": "107027353",

  "createdByUsername": "pulse",

  "updatedAt": 1507897514399,

  "updatedBy": "107027353",

  "deletedAt": null,

  "deletedBy": null,
```

	<pre> "name": "Queue", "description": "Not so new queue", "channel": , "tenant": "NPC", "users": [{ "id": "77505", "username": "NPC", "tenants": { "oo9_B0JZ5HrRonpCoeRBig": "NPC" } },], "deleted": false }], "total": 5, "limit": 100, "offset": 0, "filter": null, "orderBy": }</pre>
--	---

Create a new Queue

Request

POST	/api/queue	<pre>{ "name": "Queue", "description": "A new queue", "channel": , "tenant": "NPC", "users": [</pre>	--	The metadata on the created queue	Create a new queue
------	------------	---	----	-----------------------------------	--------------------

		<pre>{ "id": "77505" }, { "id": "-1616614560" }]</pre>			
--	--	---	--	--	--

Example

Request	Request <code>/api/queue</code> Payload <pre>{ "name": "Queue", "description": "A new queue", "channel": , "tenant": "NPC", "users": [{ "id": "77505" }, { "id": "-1616614560" }] }</pre>
	HTTP 200 Response <pre>{</pre>

```
"id": "4ca173fb-c556-4e52-8c80-4d6be164ab76",

"createdAt": 1507892812964,

"createdBy": "107027353",

"createdByUsername": "pulse",

"updatedAt": null,

"updatedBy": null,

"deletedAt": null,

"deletedBy": null,

"name": "Queue",

"description": "A new queue",

"channel": ,

"tenant": "NPC",

"users": [

{

"id": "77505",

"username": "NPC",

"tenants": {

"oo9_B0JZ5HrRonpCoeRBig": "NPC"

}

},

{

"id": "-1616614560",

"username": "landlord",

"tenants": {

"oo9_B0JZ5HrRonpCoeRBig": "NPC",

"mVRhp-Dt-cExvCfowcdC3g": "NRC",

"tZRk6Tb6DsHhTnaTzwFFgw": "QPC",

"m3Yh70fBAzdeGKDq09NJDQ": "WPC",

"nHs-BP60LUepRAWwD1ZDVg": "WPF",

"grYjHATpDflYIiLnKGZEgQ": "MPF",

"gWQ0X1U1sZX9XpHBrBdCjQ": "BPC",

"klZi89N1qXy9q0jvuPxBFQ": "MRC",
```

	<pre> "u_GQdDE_k5M594GQJGZDyg": "MPC" } }, "deleted": false }</pre>
--	--

Update the Queue matching the given ID

Request

PUT	/api/queue/<id>	<pre>{ "name": "Queue", "description": "Not so new queue", "channel": , "tenant": "NPC", "users": [{ "id": "77505" }] }</pre>	--	--	Updates the queue matching the given ID
-----	-----------------	---	----	----	---

Example

Request	URL request <pre>/api/queue/4ca173fb-c556-4e52*-8c80-4d6be164ab76</pre> Payload <pre>{ "name": "Queue", "description": "Not so new queue", "tenant": "NPC", "channel": ,</pre>
---------	--

	<pre> "users": [{ "id": "77505" }] }</pre>
Response	HTTP 200 <pre>{ "id": "4ca173fb-c556-4e52-8c80-4d6be164ab76", "createdAt": 1507892812964, "createdBy": "107027353", "createdByUsername": "pulse", "updatedAt": 1507897514399, "updatedBy": "107027353", "deletedAt": null, "deletedBy": null, "name": "Queue", "description": "Not so new queue", "tenant": "NPC", "channel": , "users": [{ "id": "77505", "username": "NPC", "tenants": { "oo9_B0JZ5HrRonpCoeRBig": "NPC" } }], "deleted": false</pre>

	<pre>} </pre>
--	---------------

Delete the queue matching the given ID

Request

DELETE	/api/queue/<id>	--	--	--	Delete the queue matching the given ID
---------------	-----------------	----	----	----	--

Example

Request	URL request /api/delete/56e53ba8-0f10-4c6f-8486*-83817adef12e
Response	HTTP 204

Queue User

Get the Queues to which the user is assigned

Request

GET	/api/queue-user/user-queues	--	--	List of Queue JSON objects	Gets the list of queues to which the user is assigned
-----	-----------------------------	----	----	----------------------------	---

Example

Request	/api/queue-user/user-queues
Response	<pre>[{ "id": "4ca173fb-c556-4e52-8c80-4d6be164ab76", "createdAt": 1507898288948, "createdBy": "107027353", "createdByUsername": null, "updatedAt": 1507898288946, "updatedBy": "107027353", "deletedAt": null, "deletedBy": null, "name": "Queue", "description": "Queue description", "tenant": "NPC", "users": null, "deleted": false }]</pre>

Automation

Get the Automation Rule matching the given ID

Request

GET	/api/automation/<id>	--	--	The Automation Rule as a JSON object	Get the Automation Rule matching the given ID
-----	----------------------	----	----	--------------------------------------	---

Example

Request	/api/automation/34531409-07db-456e-9e56-1b08919e1a5a				
Response	HTTP 200 <pre>{ "id": "34531409-07db-456e-9e56-1b08919e1a5a", "deleted": false, "name": "Set Event Initial Status: Fraud + Not Alert = Fraud", "description": "(Note that Pulse will not be notified by this event status operation)", "enabled": true, "position": 1, "channel": "EVENT", "trigger": "EVENT", "conditions": [{ "field": "schema.fields.fraud", "operator": "EQUAL", "value": "true" }, { "field": "alert", "operator": "EQUAL", "value": "false" }], "actions": [{ "action": "SET_EVENT_INITIAL_STATUS", "values": { "status": "fraud" } }] }</pre>				

Get a paginated list of Automation Rules

Request

GET	/api/automation?<pagination parameters>	--	Pagination	A paginated list of Automation Rules	Get a paginated list of Automation Rules
-----	---	----	------------	--------------------------------------	--

Example

Request	/api/automation?limit=10&offset=0				
Response	HTTP 200 <pre>{ "items": [{ "id": "bb00583d-151e-4545-b4a5-a93cd7544941", "deleted": false, "name": "Set Event Initial Status: Not Fraud + Alert = Unreviewed", "description": "(Note that Pulse will not be notified by this event status operation)",</pre>				

```
    "enabled": true,

    "position": 4,

    "channel":

    "trigger": "EVENT",

    "conditions": [{

    "field": "schema.fields.fraud",

    "operator": "EQUAL",

    "value": "false"

    }, {

    "field": "alert",

    "operator": "EQUAL",

    "value": "true"

    }],

    "actions": [{

    "action": "SET_EVENT_INITIAL_STATUS",

    "values": {

    "status": "unknown"

    }

    }]

    }, {

    "id": "81e04706-4063-42c6-bca8-30050d878343",

    "deleted": false,

    "name": "Set Event Initial Status: Fraud + Not Alert = Fraud",

    "description": "(Note that Pulse will not be notified by this event status operation)",

    "enabled": true,

    "position": 1,

    "channel":

    "trigger": "EVENT",

    "conditions": [{

    "field": "schema.fields.fraud",

    "operator": "EQUAL",
```

```
    "value": "true"

  }, {

    "field": "alert",

    "operator": "EQUAL",

    "value": "false"

  }],

  "actions": [{

    "action": "SET_EVENT_INITIAL_STATUS",

    "values": {

      "status": "fraud"

    }

  ]

}, {

  "id": "13052249-4966-46d8-9645-1e280d4d5ed0",

  "deleted": false,

  "name": "Set Event Initial Status: Not Fraud + Not Alert = Not Fraud",

  "description": "(Note that Pulse will not be notified by this event status operation)",

  "enabled": true,

  "position": 2,

  "channel":

  "trigger": "EVENT",

  "conditions": [{

    "field": "schema.fields.fraud",

    "operator": "EQUAL",

    "value": "false"

  }, {

    "field": "alert",

    "operator": "EQUAL",

    "value": "false"

  }],

  "actions": [{

    "action": "SET_EVENT_INITIAL_STATUS",
```

```
    "values": {
      "status": "genuine"
    }
  ]
}, {
  "id": "a8358d60-42fb-4db5-8578-cfa432fe56f5",
  "deleted": false,
  "name": "Set Event Initial Status: Fraud + Alert = Unreviewed",
  "description": "(Note that Pulse will not be notified by this event status operation)",
  "enabled": true,
  "position": 3,
  "channel":
  "trigger": "EVENT",
  "conditions": [{
    "field": "schema.fields.fraud",
    "operator": "EQUAL",
    "value": "true"
  }, {
    "field": "alert",
    "operator": "EQUAL",
    "value": "true"
  }],
  "actions": [{
    "action": "SET_EVENT_INITIAL_STATUS",
    "values": {
      "status": "unknown"
    }
  }
  ],
  "total": 4,
  "limit": 10,
```

	<pre>"offset": 0, "filter": null, "orderBy": null }</pre>
--	--

Create a new Automation Rule

Request

POST	/api/automation	<pre>{ "name": "New Rule", "description": "New rule", "enabled": true, "channel": "EVENT", "conditions": [{ "field": "alert", "operator": "EQUAL", "value": "true" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] }</pre>	--	The metadata on the created Automation Rule	Create a new Automation Rule
------	-----------------	--	----	---	------------------------------

Example

Request	URL request <pre>/api/automation</pre> Payload<pre>{ "name": "New Rule", "description": "New rule", "enabled": true, "channel": "EVENT", "conditions": [{ "field": "alert", "operator": "EQUAL", "value": "true" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] }</pre>
	HTTP 200
Response	

	<pre>{ "id": "4cc6df55-b19b-425b-a699-a97bdb730603", "deleted": false, "name": "New Rule", "description": "New rule description", "enabled": true, "position": 5, "channel": "EVENT", "trigger": "EVENT", "conditions": [{ "field": "alert", "operator": "EQUAL", "value": "true" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] }</pre>
--	--

Update the Automation Rule matching the given ID

Request

PUT	/api/automation/<id>	<pre>{ "name": "", "description": "", "enabled": true, "trigger": "", "conditions": [{ "field": "", "operator": "", "value": "" }], "actions": [{ "action": "", "values": {} }, { "action": "", "values": {} }], "position": }</pre>	--	--	Updates the queue matching the given ID
-----	----------------------	--	----	----	---

Example

Request	URL request <pre>/api/automation/56e53ba8-0f10-4c6f-8486*-83817adef12e</pre>				
	Payload <pre>{ "name": "New Rule", "description": "New rule description update", "enabled": true, "channel": "EVENT", "trigger": "EVENT", "conditions": [{ "field": "alert", "operator": "EQUAL", "value": "true" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }, { "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }], "position": 5 }</pre>				
Response	HTTP 200 <pre>{ "id": "4cc6df55-b19b-425b-a699-a97bdb730603", "deleted": false, "name": "New Rule", "description": "New rule description update", "enabled": true, "position": 5, "channel": "EVENT", "trigger": "EVENT", "conditions": [{ "field": "alert", "operator": "EQUAL", "value": "true" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }, { "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] }</pre>				

Delete the Automation Rule matching the given ID

Request

DELETE	/api/automation/	--	--	--	Delete the Automation Rule matching the given ID
--------	------------------	----	----	----	--

Example

Request	URL request <pre>/api/automation/56e53ba8-0f10-4c6f-8486*-83817adef12e</pre>				
Response					

	HTTP 204
--	----------

Change the execution order of the Automation Rule matching the given ID

Request

PATCH	/api/automation/<id>	{ "position": }	--	--	Change the execution order of the Automation Rule matching the given ID
-------	----------------------	-----------------------	----	----	---

Example

Request	URL request				
	/api/automation/56e53ba8-0f10-4c6f-8486*-83817adef12e				
	{ "position": 2 }				
Response	HTTP 204				

SLA

Get the SLA matching the given ID

Request

GET	/api/sla/<id>	--	--	The SLA as a JSON object	Get the SLA matching the given ID
-----	---------------	----	----	--------------------------	-----------------------------------

Example

Request	/api/sla/34531409*-07db-456e-9e56*-1b08919e1a5a				
Response	HTTP 200 <pre>{ "id": "d762698a-3cee-469f-a8a7-6a337bd33c86", "channel": { "deleted": false, "name": "High priority", "description": "Increase alert priority if not reviewed within limit.", "goal": { "type": "TIME_PERIOD", "period": 12, "timeUnit": "HOURS", "valid": true }, "conditions": [{ "field": "statusId", "operator": "EQUAL", "value": "unknown" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] } }</pre>				

Get a paginated list of SLAs

Request

GET	/api/sla?<pagination parameters>	--	Pagination	A paginated list of SLAs	Get a paginated list of SLAs
-----	----------------------------------	----	------------	--------------------------	------------------------------

Example

Request	/api/sla?limit=10&offset=0				
Response	HTTP 200 <pre>{ "items": [{ "id": "bb00583d-151e-4545-b4a5-a93cd7544941", "channel": { "deleted": false, "name": "Set Event Initial Status: Not Fraud + Alert = " } }] }</pre>				


```

Unreviewed", "description": "(Note that Pulse will not be notified by
this event status operation)", "enabled": true, "position": 4, "trigger": "EVENT", "conditions": [{ "field":
"schema.fields.fraud", "operator":
"EQUAL", "value": "false" }, { "field": "alert", "operator":
"EQUAL", "value": "true" }], "actions": [{ "action":
"SET_EVENT_INITIAL_STATUS", "values":
{ "status": "unknown" }, { "id": "81e04706-4063-42c6-
bca8-30050d878343", "channel": "deleted":
false, "name": "Set Event Initial Status: Fraud + Not Alert =
Fraud", "description": "(Note that Pulse will not be notified by this
event status operation)", "enabled":
true, "position": 1, "trigger": "EVENT", "conditions": [{ "field":
"schema.fields.fraud", "operator":
"EQUAL", "value": "true", "field": "alert", "operator":
"EQUAL", "value":
>false" }], "actions": [{ "action": "SET_EVENT_INITIAL_STATUS", "values":
{ "status": "fraud" }, { "id":
"13052249-4966-46d8-9645-1e280d4d5ed0", "channel": "deleted": false, "name": "Set Event Initial Status: Not Fraud + Not
Alert = Not Fraud", "description": "(Note that Pulse will not be
notified by this event status operation)", "enabled":
true, "position": 2, "trigger":
"EVENT", "conditions": [{ "field":
"schema.fields.fraud", "operator":
"EQUAL", "value": "false" }, { "field": "alert", "operator":
"EQUAL", "value":
>false" }], "actions": [{ "action": "SET_EVENT_INITIAL_STATUS", "values":
{ "status": "genuine" }, { "id": "a8358d60-42fb-4db5-8578-
cfa432fe56f5", "channel": "deleted": false, "name": "Set Event Initial Status: Fraud + Alert =
Unreviewed", "description": "(Note that Pulse will not be notified by
this event status operation)", "enabled": true, "position": 3, "trigger": "EVENT", "conditions": [{ "field":
"schema.fields.fraud", "operator":
"EQUAL", "value": "true", "field": "alert", "operator":
"EQUAL", "value": "true" }], "actions": [{ "action":
"SET_EVENT_INITIAL_STATUS", "values":
{ "status": "unknown" }, { "total": 4, "limit": 10, "offset": 0, "filter": null, "orderBy": null* }

```

Create a new SLA

Request

POST	/api/sla	{ "name": "", "channel": "description":	--	The metadata on the created SLA	Create a new SLA
------	----------	---	----	---------------------------------	------------------

		<pre> { "goal": { "type": "TIME_PERIOD", "period": 8, "timeUnit": "HOURS", "conditions": [{ "field": "statusId", "operator": "EQUAL", "value": "unknown" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] } } </pre>			
--	--	---	--	--	--

Example

Request	URL request				
	/api/sla				
Response	Payload				
	<pre> { "name": "New SLA", "channel": "SLA description", "goal": { "type": "TIME_PERIOD", "period": 8, "timeUnit": "HOURS", "conditions": [{ "field": "statusId", "operator": "EQUAL", "value": "unknown" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] } } </pre>				
Response	HTTP 200				
	<pre> { "id": "d6266491-913c-4494-be75-6cfc4a56d317", "deleted": false, "name": "New SLA", "channel": "SLA description", "goal": { "type": "TIME_PERIOD", "period": 8, "timeUnit": "HOURS", "valid": true, "conditions": [{ "field": "statusId", "operator": "EQUAL", "value": "unknown" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] } } </pre>				

Update the SLA matching the given ID

Request

PUT	/api/sla/<id>	<pre> { "name": "New SLA", "channel": "SLA description", "goal": { "type": "TIME_PERIOD", "period": 8, "timeUnit": "HOURS", "conditions": [{ "field": "statusId", "operator": "EQUAL", "value": "unknown" }], "actions": [{ "action": "SET_EVENT_QUEUE", "values": { "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" } }] } } </pre>	--	--	Updates the SLA matching the given ID
-----	---------------	--	----	----	---------------------------------------

		<pre>"" "" "" "" }], "" "" "" "" "actions" : [{ "" "" "" "" "" "" "" "" "action": "", "" "" "" "" "" "" "" "values": "" "" "" "" "" }]</pre>		
--	--	---	--	--

Example

Request	URL request <pre>/api/automation/56e53ba8-0f10-4c6f-8486*-83817adef12e</pre>
	Payload <pre>{ "" "" "" "" "name": "New SLA", "" "" "" "" "channel": "" "" "" "" "description": "Update SLA description", "" "" "" "" "goal": { "" "" "" "" "" "" "" "" "type": "TIME_PERIOD", "" "" "" "" "" "" "" "" "" "period": 8, "" "" "" "" "" "" "" "" "timeUnit": "HOURS" "" "" "" "" }, "" "" "" "" "conditions": [{ "" "" "" "" "" "" "" "" "field": "statusId", "" "" "" "" "" "" "" "" "operator": "EQUAL", "" "" "" "" "" "" "" "" "" "" "" "value": "unknown" "" "" "" "" }], "" "" "" "" "actions": [{ "" "" "" "" "" "" "" "" "action" : "SET_EVENT_QUEUE", "" "" "" "" "" "" "" "" "values": { "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" "" "" "" "" "" "" "" "" } "" "" "" "" }] }</pre>
Response	HTTP 200
	<pre>{ "" "" "" "" "id": "d6266491-913c-4494-be75-6cfc4a56d317", "" "" "" "" "deleted": false, "" "" "" "" "name": "New SLA", "" "" "" "" "channel": "" "" "" "" "description": "Update SLA description", "" "" "" "" "goal": { "" "" "" "" "" "" "" "" "type": "TIME_PERIOD", "" "" "" "" "" "" "" "" "" "" "" "period": 8, "" "" "" "" "" "" "" "" "timeUnit": "HOURS", "" "" "" "" "" "" "" "" "valid": true "" "" "" "" }, "" "" "" "" "conditions": [{ "" "" "" "" "" "" "" "" "field": "statusId", "" "" "" "" "" "" "" "" "operator": "EQUAL", "" "" "" "" "" "" "" "" "value": "unknown" "" "" "" "" }], "" "" "" "" "actions": [{ "" "" "" "" "" "" "" "" "action": "SET_EVENT_QUEUE", "" "" "" "" "" "" "" "" "values": { "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "" "queue": "d762698a-3cee-469f-a8a7-6a337bd33c86" "" "" "" "" "" "" "" "" } "" "" "" "" }] }</pre>
	Â

Delete the SLA matching the given ID

Request

DELETE	<pre>/api/sla/<id></pre>	--	--	--	Delete the SLA matching the given ID
--------	--------------------------------	----	----	----	--------------------------------------

Example

Request	URL request <pre>/api/sla/d6266491-913c-4494*-be75-6cfc4a56d317</pre>
Response	HTTP 204Â

List

List available user lists

Request

GET	<pre>/api/list</pre>	--	--	List of available lists to current user.	List available user lists.
-----	----------------------	----	----	--	----------------------------

Example

Request	<pre>/api/list</pre>
Response	HTTP 200Â

<pre>[{ "id": "gPEhUpN0SJ5_6p0rhzJJgg", "name": "VIP Customers", "description": "VIP Customers", "type": "SIMPLE", "tenancyType": "GLOBAL", "eventField": { "schema.fields.customer_id": { "id": "gPEhUpN0SJ5_6p0rhzJJgg", "name": "Travel List", "description": "Travel List", "type": "COMPLEX", "tenancyType": "TENANT GROUP", "eventField": { "schema.fields.customer_id": { "possibleValues": ["US", "UK", "PT"] } } } } }]</pre>
--

Retrieve the available lists to the user, indexed by event fields

Request

GET	/api/list/event-lists	--	--	Map of available lists to current user., indexed by event fields.	Retrieve the available lists to the user, indexed by event fields.
-----	-----------------------	----	----	---	--

Example

Request	/api/list/event-lists
Response	HTTP 200 <pre>{ "schema.fields.merchant_id": [{ "id": "gPEhUpN0SJ5a6p0rhzJJgg", "name": "country_list", "description": "posneg_card_token", "type": "POS_NEG", "tenancyType": "TENANT", "eventFields": [{ "schema.fields.merchant_id": { "schema.fields.customer_id": { "possibleValues": ["POSITIVE", "NEGATIVE", "REVIEW"] } } }] }], "tokenized": false, "schema.fields.merchant_id": { "id": "iNXiRaaJPfZk7JfllitDQQ", "name": "posneg_channel", "description": "posneg_channel", "type": "COMPLEX", "tenancyType": "TENANT", "eventFields": [{ "schema.fields.merchant_id": { "schema.fields.customer_id": { "possibleValues": ["Block", "Unblock"] } }]] }, "tokenized": false }</pre>

Search in which lists an entity is located

Request

GET	/api/list/search	--	field, value	Map of available lists to current user, indexed by event fields.	Search in which lists an entity is located.
-----	------------------	----	--------------	--	---

Example

Request	/api/list/search?field=schema.fields.merchant_id&value=441439378753317		
Response	HTTP 200 <pre>{ "containsAudit": true, "result": [{ "id": "gPEhUpN0SJ5_6p0rhzJJgg", "key": "441439378753317", "note": null, "ten ant": null, "validity": null, "list": { "id": "lq5UPBQigefmxAr5l3hEAA", "name": "country_list", "description": "posneg_card_token", "type": "POS_NEG", "tenancyType": "TENANT", "eventFields": ["schema.fields.merchant_id", "schema.fields.customer_id"], ["POSITIVE", "NEGATIVE", "REVIEW"], "tokenized": false }, { "value": "POSITIVE" }] }</pre>		

Execute a bulk update over lists

Request

POST	/api/list/update	<pre>{ "eventId": , "actions": [{ "listId": , "field": , "itemId": , "action": , "validity": { "startDate": , "endDate": , }, "comment": , "comment": , "comment": ... }] }</pre>	-	Execute a set of update requests over lists.	Execute a bulk update over lists.
------	-----------------------------	---	---	--	-----------------------------------

Example

Request	URL Request	
	/api/list/update	
	Payload	
	<pre>{ "eventId": { "id": "5861bbff-d3f8-40bc-bba1-b2d7539073ac", "timestamp": 12345678 }, "actions": [{ "listId": "fiNXiRaaJPfZk7Jf1litDQQ", "field": "schema.fields.customer_id", "itemId": "7a90872e-5e51-4740-816b-b39c19d32462", "action": "UPDATE", "validity": { "startDate": 1000000, "endDate": 5000000 }, "comment": "Updating the validity of an item" }, { "listId": "rk4dBDFXU_Db-CqHZp1KdQ", "field": "schema.fields.customer_id", "action": "UPDATE", "validity":</pre>	

	<pre> null, { "comment": "Updating a POS/NEG list", "value": "POSITIVE", "listId": "rk4dBDFXU_Db-CqHZp1KdQ", "field": "fields.card_token", "action": "CREATE", "validity": { "startDate": 1000000, "endDate": 5000000 }, "comment": "Creating an item in COMPLEX list", "value": "ARGENTINA" , { "listId": "rk4dBDFXU_Db- CqHZp1KdQ", "field": "schema.fields.card_last4", "action": "CREATE", "validity": null, "comment": "Creating an item in SIMPLE list" }, { "itemId": "7a90872e-5e51-4740-816b-b39c19d32462", "action": "DELETE", "comment": "Delete an item" } } </pre>
Response	HTTP 200 <pre> { "schema.fields.customer_id": [{ "listId": "rk4dBDFXU_Db-CqHZp1KdQ", "errors": [{ "error": "errorCode", "message": "Something went wrong" }] } } </pre>

Execute a manual bulk update over lists

Request

POST	/api/list/update-entities	<pre> [{ "listId": , "field": , "itemId": , "action": , "validity": : { "startDate": , "endDate": , }, "comment": , ...] </pre>	-	Execute a set of manual update requests over lists.	Execute a manual bulk update over lists.
------	---------------------------	---	---	---	--

Example

Request	URL Request
	/api/list/update-entities
Request	Payload
	<pre> [{ "listId": "fiNXiRaaJPfZk7Jf1litDQQ" "itemId": "7a90872e-5e51-4740-816b-b39c19d32462", "action": "UPDATE", "validity": { "startDate": 1000000, "endDate": 5000000 }, "comment": "Updating the validity of an item", "tenantId": "tenantId1" }, { "listId": "rk4dBDFXU_Db-CqHZp1KdQ", "action": "UPDATE", "validity": null, "comment": "Updating a POS/NEG list", "value": "POSITIVE", "tenantGroupId": </pre>

Request

GET	/api/channel[?channelPermissionLevel=level]	--	Optional channel-permission level to filter the channels according to the user access-level (read-write, read-only, none)	List all channels configured in Case Manager	List all channels configured in Case Manager
-----	---	----	---	--	--

Example

Request	/api/channel				
Response	HTTP 200 [{ "id": "aml", "name": "channel.aml.name" }, { "id": "transaction-fraud", "name": "channel.transaction-fraud.name" }]				

Get Channel Details

Request

GET	/api/channel/{id}	--	id	Details of the channel with the given <i>id</i> in the path.	List the details of the channel with the given <i>id</i> in the path. Returns 404 if <i>id</i> doesn't exist.
-----	-------------------	----	----	--	--

Example

Request	/api/channel/transaction-fraud				
Response	HTTP 200 { "id": "transaction-fraud", "name": "channel.transaction-fraud.name" }				

Group

List all access groups from Pulse

Request

GET	/api/group/list	--	--	The list of all Pulse access groups.	List all Pulse access groups.
-----	-----------------	----	----	--------------------------------------	-------------------------------

Example

Request	/api/group/list				
Response	HTTP 200				


```
{
  "items": [
    {
      "id": "landlords",
      "groupName": "landlords",
      "parentId": "kTrt98FDyhq9tL-WG7VEoA"
    },
    {
      "id": "rbdCX3HHJQUHM4Cy9_tJNA",
      "groupName": "Europe",
      "parentId": "kTrt98FDyhq9tL-WG7VEoA"
    },
    {
      "id": "lMb4wUfb1i6kVyXy51BAsw",
      "groupName": "Portugal",
      "parentId": "rbdCX3HHJQUHM4Cy9_tJNA"
    },
    {
      "id": "nC8Ao53iaE6sShcZjahIlw",
      "groupName": "Lisbon",
      "parentId": "lMb4wUfb1i6kVyXy51BAsw"
    },
    {
      "id": "o6XRyx7PdAAxtCd5Fwh0Wg",
      "groupName": "France",
      "parentId": "rbdCX3HHJQUHM4Cy9_tJNA"
    },
    {
      "id": "vW8H0sMsKh46NMQWdDhDjw",
      "groupName": "America",
      "parentId": "kTrt98FDyhq9tL-WG7VEoA"
    }
  ],
  "total": 6,
  "limit": 6,
  "offset": 0,
  "filter": null,
  "orderBy": null,
  "totalThreshold": null*
}
```

Retrieve ID and name of a given group.

Request

GET	/api/group/select/<id>	--	groupID	The ID and name from a given group ID.	Get the ID and name of a given group ID.
-----	------------------------	----	---------	--	--

Example

Request	/api/group/select/lMb4wUfb1i6kVyXy51BAsw				
Response	HTTP 200 { "value": "lMb4wUfb1i6kVyXy51BAsw", "label": "Portugal" }				

Retrieve the full details of a given group ID

Request

GET	/api/group/detail/<id>	--	groupID	The full details of a group given a group ID.	Get the full details of a group from a given group ID.
-----	------------------------	----	---------	---	--

Example

Request	/api/group/detail/lMb4wUfb1i6kVyXy51BAsw				
Response	HTTP 200 { "id": "lMb4wUfb1i6kVyXy51BAsw", "groupName": "Portugal", "parentId": "rbdCX3HHJQUHM4Cy9_tJNA" }				

Tenant

List tenants from Pulse

Request

GET	/api/tenant	--	Pagination	List of tenants	
-----	-------------	----	------------	-----------------	--

			channelId		List of tenants according to the pagination parameters.
--	--	--	-----------	--	---

Available filters (pagination):

id	Filter by the tenant's identifier.	'id' eq 'IMb4wUfb1i6kVyXy51BASw'
value	Filter by the tenant's name (value).	'value' like 'ten'
label	Filter by the tenant's label.	'label' eq 'tenant1'
comment	Filter by the tenant's comment.	'comment' like 'something'
in_rule_block	Filter by whether the tenant is present in a rule block or not.	'in_rule_block' eq 'true'

Example

Request	/api/tenant
Response	HTTP 200 <pre>{ "items": [{ "value": "BPC", "label": "BPC", "id": "kI6UipWo5AHherzeKYdDGg" }, { "value": "MPF", "label": "MPF", "id": "uyy4movJD-l-CToDJwNESg" }, { "value": "PQR", "label": "PQR", "id": "rPS0tKWo6gVxSb-asINEqw" }, { "value": "WPC", "label": "WPC", "id": "tbW-d2lwijT4rzJuVg1Dlw" }, { "value": "GHI", "label": "GHI", "id": "i5L_07Ls45F4vruf7XVGNQ" }, { "value": "NPC", "label": "NPC", "id": "o7ckoT_GQ-zfWqp2HWFPSQ" }, { "value": "NRC", "label": "NRC", "id": "vPogb68pXcZYfYjjANhAGw" }, { "value": "QPC", "label": "QPC", "id": "oIaDhPyd3cflhfdyoS5MVw" }, { "value": "MRC", "label": "MRC", "id": "g8zrir0Vq8PDxTM4w6NOZQ" }, { "value": "MNO", "label": "MNO", "id": "gLFPo5SLc0pSbSCRA1xFuA" }], "total": 16, "limit": 10, "offset": 0, "filter": null, "orderBy": null, "totalThreshold": null }</pre>

Example

Request	/api/tenant?filter='in_rule_block' eq 'true'
Response	HTTP 200 <pre>{ "items": [{ "value": "BPC", "label": "BPC", "id": "kI6UipWo5AHherzeKYdDGg" }, { "value": "MPF", "label": "MPF", "id": "uyy4movJD-l-CToDJwNESg" }, { "value": "PQR", "label": "PQR", "id": "rPS0tKWo6gVxSb-asINEqw" }, { "value": "WPC", "label": "WPC", "id": "tbW-d2lwijT4rzJuVg1Dlw" }, { "value": "GHI", "label": "GHI", "id": "i5L_07Ls45F4vruf7XVGNQ" }, { "value": "NPC", "label": "NPC", "id": "o7ckoT_GQ-zfWqp2HWFPSQ" }, { "value": "NRC", "label": "NRC", "id": "vPogb68pXcZYfYjjANhAGw" }, { "value": "QPC", "label": "QPC", "id": "oIaDhPyd3cflhfdyoS5MVw" }, { "value": "MRC", "label": "MRC", "id": "g8zrir0Vq8PDxTM4w6NOZQ" }, { "value": "MNO", "label": "MNO", "id": "gLFPo5SLc0pSbSCRA1xFuA" }], "total": 16, "limit": 10, "offset": 0, "filter": null, "orderBy": null, "totalThreshold": null }</pre>

```
    { "label": "NRC", "id": "vPogb68pXcZYfYjjANhAGw" },  
    { "value": "QPC", "label": "QPC",  
      "id": "oIaDhPyd3cflhfdyoS5MVw" },  
    { "value": "MRC", "label": "MRC", "id": "g8zrir0Vq8PDx  
TM4w6NOZQ" },  
    { "value": "MNO", "label": "MNO", "id": "gLFPo5SLcOpSbSCRA1xFuA" }  
  ],  
  "total": 16,  
  "limit": 10,  
  "offset": 0,  
  "filter":  
    "'in_rule_block' eq 'true'"  
  "orderBy": null,  
  "totalThreshold": null* }
```