


On this page

Authentication

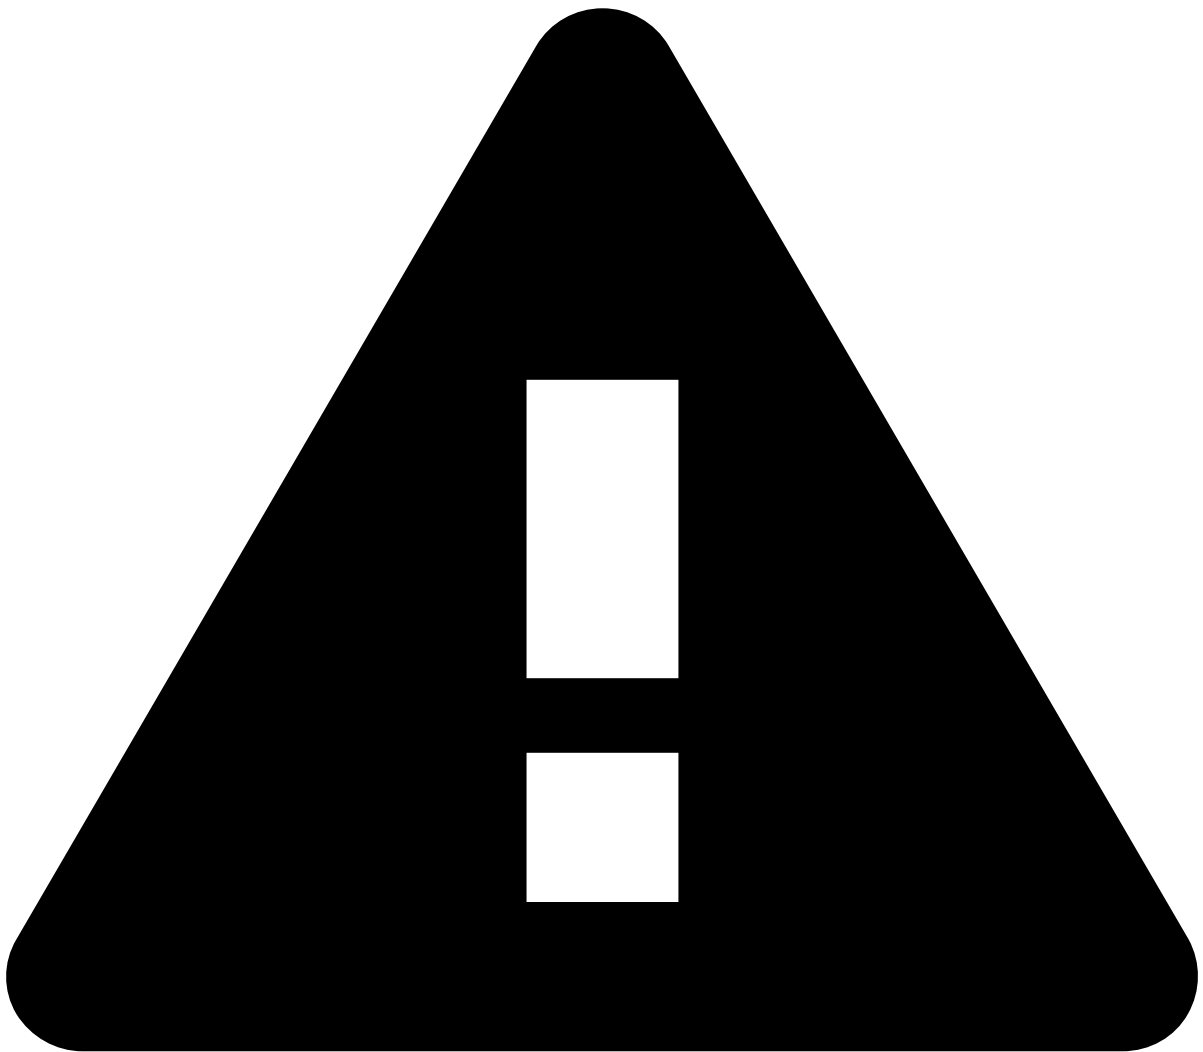

Deprecated API specification

Case Manager is currently moving to an API specification generated with Swagger. Due to Case Manager's API size and complexity, the resources are being gradually moved to the new format. Until this transition is complete, please make sure that you check both this page and the [new API specification](#).

When all resources are moved to the new format, this page will be deleted.

This page details the REST API regarding Authentication.

Session

Get the session of the user that is authenticated in the system

Request

GET	/api/session	--	--	The user's session as a JSON object.	Get the session of the user that is authenticated in the system.
-----	--------------	----	----	--------------------------------------	--

Example

Request	/api/session
Response	HTTP 200 <pre>{ "id": "107027353", "username": "pulse", "password": null, "name": "pulse", "roles": [], "permissions": ["cm:"], "tenancy": , "posNegPrefix": null* }</pre>

Login the user in the system

Request

POST	/api/session	<pre>{ "username": "", "password": "", "otp": "" }</pre>	--	The user's session as a JSON object.	Login the user in the system.
------	--------------	--	----	--------------------------------------	-------------------------------

Example

Request	URL request				
	/api/session				
Request	Payload				
	<pre>{ "username": "pulse", "password": "Pulse1!!", "otp": "271920" }</pre>				

	<pre>}</pre>
Response	HTTP 200Â (if all fields are correct OR if otp is missing but Pulse's 2FA is disabled) <pre>{ "id": "107027353", "username": "pulse", "password": null, "name": "pulse", "authBy": "PULSE", "roles": [], "permissions": ["cm:"], "tenants": [{ "id": "oo9_B0JZ5HrRonpCoeRBig", "key": "NPC", "name": "NPC", "comment": ""* }], "legacyMultitenancy": false, "otp": null, "secretResetKey": null, "candidateSecretKey": null, "tenancy": { "present": false* }, "posNegPrefix": { "present": false*</pre>

	<pre>} }</pre>
Response	HTTP 204 (with 2FA enabled - indicates that should proceed to the next step)

Generate the user's 2FA configuration.

Request

PUT	/api/session/generate-config	<pre>{ "username": "", "password": "" }</pre>	--	--	Generates a candidate secret key.
-----	------------------------------	--	----	----	-----------------------------------

Example

Request	URL request /api/session/validate-config Payload <pre>{ "username": "riskofficer2", "password": "Pulse1!!" }</pre>				
Response	HTTP 200 Payload <pre>{ "candidateSecretKey": "CANDIDATE_SECRET_KEY" }</pre>				

Validate the user's 2FA configuration

Request

PUT	/api/session/validate-config	<pre>{ "username"</pre>	--	--	Validate the user's 2FA configuration (generating a secret reset key) and logs the user in.
-----	------------------------------	------------------------------------	----	----	---

		<pre>": "", "password": "", "otp": "" }</pre>			
--	--	---	--	--	--

Example

Request	URL request <pre>/api/session/validate-config</pre> Payload <pre>{ "username": "risofficer2", "password": "Pulse1!!", "otp": "284024" }</pre>
Response	HTTP 200 Payload <pre>{ "secretResetKey": "SECRET_RESET_KEY" }</pre>

Reset the user's 2FA configuration.

Request

PUT	<pre>/api/session/ reset-config</pre>	<pre>{ "username": "", // required only if logged out* "password": "", // required only if logged out* "otp": "" }</pre>	--	--	Reset the user's 2FA configuration, generating a new candidate secret key.
-----	---------------------------------------	--	----	----	--

Example

Request	URL request
---------	-------------

	/api/session/reset-config Payload { "otp": "283234" }
Response	HTTP 200 Payload { "candidateSecretKey": "CANDIDATE_SECRET_KEY" }

Replace the user's 2FA configuration.

Request

PUT	/api/session/replace-config { "otp": "" } -- -- After receiving a new candidate secret key, we need to send username, password and otp in order to confirm and obtain a new reset key.
-----	--

Example

Request	URL request /api/session/reset-config Payload { "otp": "" }
Response	HTTP 200 Payload { "secretResetKey": "SECRET_RESET_KEY" }

	<pre>{}{}</pre>
--	-----------------

Change the user's password.

Request

PUT	/api/session	<pre>{ "username": "", "passwords": { "oldPassword": "", "newPassword": ""* } }</pre>	--	--	Change the user's password.
-----	--------------	---	----	----	-----------------------------

Example

Request	URL request <pre>/api/session</pre> Payload <pre>{ "username": "", "passwords": { "oldPassword": "", "newPassword": ""* } }</pre>				
	Response	HTTP 204			

Restore the user's expired password.

Request

PUT	/api/session/restore	<pre>{ "username": "", "passwords": {</pre>	--	--	Restore the user's password.
-----	----------------------	---	----	----	------------------------------

		<pre>"oldPassword": "", "newPassword": "*** } }</pre>			
--	--	--	--	--	--

Example

Request	URL request <pre>/api/session/restore</pre> Payload <pre>{ "username": "", "passwords": { "oldPassword": "", "newPassword": "*** } }</pre>
Response	HTTP 204

Logout the user from the system.

Request

DELETE	/api/session	--	--	--	Logout the user from the system
--------	--------------	----	----	----	---------------------------------

Example

Request	URL request <pre>/api/session</pre>
Response	HTTP 204

Request password reset for the user.

Request

POST	/api/session/request-password-reset	<pre>{ "username": "",</pre>	--	--	Request password reset for the user.
------	-------------------------------------	--	----	----	--------------------------------------

		<pre>"clientId": ""* }</pre>			
--	--	------------------------------	--	--	--

Example

Request	URL request <pre>/api/session/request-password-reset</pre> <pre>{* "username": "YWRtaW4=", "clientId": "pulse_views"* }</pre>
Response	HTTP 204

Validate password reset for the user.

Request

POST	<pre>/api/session/validate-password-reset</pre>	<pre>{* "username": ",* "token": ""* }</pre>	--	--	Validate password reset for the user.
------	---	--	----	----	---------------------------------------

Example

Request	URL request <pre>/api/session/validate-password-reset</pre> <pre>{* "username": "YWRtaW4=", "token": "dGVzdGU="* }</pre>
Response	HTTP 204

Confirm password reset for the user.

Request

POST	/api/session/confirm-password-reset	<pre>{* "username": "", "token": "", "newPassword": ""* }</pre>	--	--	Confirm password reset for the user.
------	-------------------------------------	--	----	----	--------------------------------------

Example

Request	URL request /api/session/confirm-password-reset <pre>{* "username": "YWRtaW4=", "token": "dGVzdGU=", "newPassword": "dGVzdGU="* }</pre>
Response	HTTP 204