

On this page

Security (security.json)

This section gives a comprehensive explanation on all the settings that are made available in the `security.json` file.

Introduction

More specifically, for each configuration entry, we will point out:

- **Property:** The name of the configuration field being referenced.
- **Value Type:** The configuration field's value data type.
- **Optional:** Whether the configuration field is optional or not.
- **Description:** How the configuration field relates with the Case Manager's functionality.

Make sure you read [this tutorial](#) in order to learn how this `security.json` file should be used.

security.json reference

permissions	JsonList<String>	No	• List of Case Manager related permissions that should be used to populate Pulse. • Case Manager related permissions are prefixed with the <code>cm:</code> token. • Case Manager permissions is a set of well-known permission string that is, they are bundled with CM. • Some Pulse related permissions are required for a user to be able login into Case Manager (remember that Case Manager's user management is backed by Pulse). Those permissions are:<pre>pulseviews:login security:ownership:read security:permissions:read security:roles:read</pre> • If there are no permissions to specify, let this property with an empty JSON array.
roles	JsonList<JsonMap<String, Object>	No	• List of Case Manager security roles. • Case Manager related roles are prefixed with the <code>cm-</code> token. • Roles are defined by a set of permissions that is, they are bound to the use requirements. • You may specify so many roles as you want. • If there are no roles to specify, let this property with an empty JSON array. • Check the properties within the role property.

Role

name	String	No	Name of the role.
permissions	JsonList<String>	No	Set of permissions used to define the role.

Permissions

A standard hierarchical permission scheme based on **scope:type:domain:action:instance** will be used.

There are three types of domains:

- **section** (alerts, details, search, settings ...): used by *frontend* to show/hide menu items and render/don't render pages;
- **actions** (set event status, add event note ...): used by *frontend* to show/hide actions;
- **resource** (event, queue, event-note, ...): used by *backend* to forbid REST API invocations.


For example, `cm:resource:event:read:*` allows the user to read all event. The wildcard may be switched by specific event UUIDs (out of scope for Phase I). Likewise, `cm:section:search:*` allows a user to access the search page. If a user has these permissions, it must also have the above one (or else he will not be able to effectively search).

Regarding the **section** domain type, it is important to mention that since you can create dynamic pages you will also need to create permissions for those pages. To access to a dynamic page, it is expected the user to have the following permission: `cm:section:<pageName>:read:` where `<pageName>` is the page name that you defined in the **pages** property under the User Interface configuration.

For example, if you have the following set of dynamic pages:

Example - Dynamic pages security

```
{
  ...,
  pages: {
    customer: {...},
    event: {...},
    merchant: {...},
    ...
  }
  ...
}
```

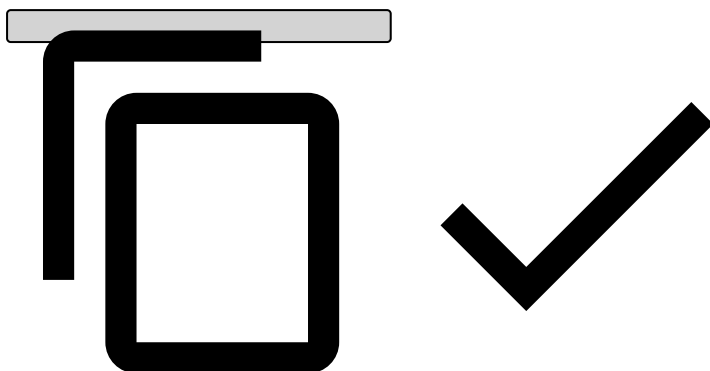

You should create the following permissions in order to access to those pages:

- `cm:section:customer:read:*`
- `cm:section:event:read:*`
- `cm:section:merchant:read:*`

Complete permissions list

You can find out what are the required Case Manager permissions [here](#).

Sample security.json file

security.json

```
{
  "roles": [
    {
      "name": "cm-admin",
      "permissions": [
        "pulseviews:login",
        "security:ownership:read",
        "security:permissions:read",
        "security:roles:read",
        "security:users:update",
        "security:users:read",

        "cm:*"
      ]
    },
    {
      "name": "cm-manager",
      "permissions": [
        "pulseviews:login",
        "security:ownership:read",
        "security:permissions:read",
        "security:roles:read",
        "security:users:update",
        "security:users:read",

        "cm:*"
      ]
    },
    {
      "name": "cm-landlord-admin",
      "permissions": [
        "pulseviews:login",
        "security:ownership:read",
        "security:permissions:read",
        "security:roles:read",
        "security:users:update",
        "security:users:read",

        "cm:*"
      ]
    },
    {
      "name": "cm-landlord-analyst",
      "permissions": [
        "pulseviews:login",
        "security:ownership:read",
        "security:permissions:read",
        "security:roles:read",
        "security:users:update",
        "security:users:read",

        "cm:element:tenant:read:*",
        "cm:resource:tenant:read:*",

        "cm:section:alert:read:*",
        "cm:section:event-details:read:*",
        "cm:section:event-search:read:*",
        "cm:section:report:create:*",
        "cm:section:report:read:*",

        "cm:action:event-status:create:*",
        "cm:action:event-queue:create:*",
        "cm:action:event-user:create:*",
        "cm:action:event-note:create:*
```

```

        "cm:action:event-posneg:create:*",
        "cm:action:event-export:create:*",
        "cm:resource:event:read:*",
        "cm:resource:event-status:create:*",
        "cm:resource:event-user:create:*",
        "cm:resource:event-queue:create:*",
        "cm:resource:event-note:create:*",
        "cm:resource:event-posneg:create:*",
        "cm:resource:event-export:read:*",
        "cm:resource:report:create:*",
        "cm:resource:report:read:*",
        "cm:resource:report-template:read:*",
        "cm:resource:file:read:*",
        "cm:resource:queue:read:*",
        "cm:resource:status:read:*",
        "cm:resource:status-reason:read:*",
        "cm:resource:user:read:*",
        "cm:resource:locale:read:*",
        "cm:resource:timezone:read:*",
        "cm:resource:session:read:*"
    ]
},
{
    "name": "cm-tenant-analyst",
    "permissions": [
        "pulseviews:login",
        "security:ownership:read",
        "security:permissions:read",
        "security:roles:read",
        "security:users:update",
        "security:users:read",
        "cm:section:alerts:read:*",
        "cm:section:event-details:read:*",
        "cm:section:event-search:read:*",
        "cm:section:report:create:*",
        "cm:section:report:read:*",

        "cm:action:event-status:create:*",
        "cm:action:event-queue:create:*",
        "cm:action:event-user:create:*",
        "cm:action:event-note:create:*",
        "cm:action:event-posneg:create:*",
        "cm:action:event-export:create:*",

        "cm:resource:event:read:*",
        "cm:resource:event-status:create:*",
        "cm:resource:event-user:create:*",
        "cm:resource:event-queue:create:*",
        "cm:resource:event-note:create:*",
        "cm:resource:event-posneg:create:*",
        "cm:resource:event-export:read:*",
        "cm:resource:report:create:*",
        "cm:resource:report:read:*",
        "cm:resource:report-template:read:*",
        "cm:resource:file:read:*",
        "cm:resource:queue:read:*",
        "cm:resource:status:read:*",
        "cm:resource:status-reason:read:*",
        "cm:resource:user:read:*",
        "cm:resource:locale:read:*",
        "cm:resource:timezone:read:*",
        "cm:resource:session:read:*"
    ]
},

```

```

{
  "name": "cm-search-only",
  "permissions": [
    "pulseviews:login",
    "security:ownership:read",
    "security:permissions:read",
    "security:roles:read",
    "security:users:update",
    "security:users:read",

    "cm:section:event-search:read:*",
    "cm:section:event-details:read:*",

    "cm:resource:event:read:*",
    "cm:resource:event-export:read:*",
    "cm:resource:queue:read:*",
    "cm:resource:status:read:*",
    "cm:resource:user:read:*",
    "cm:resource:session:read:*"
  ]
},
"permissions": [
  "pulseviews:login",
  "security:ownership:read",
  "security:permissions:read",
  "security:roles:read",
  "security:users:update",
  "security:users:read",

  "cm:*",

  "cm:section:alerts:read:*",
  "cm:section:event-details:read:*",
  "cm:section:event-search:read:*",
  "cm:section:customer-alerts:read:*",
  "cm:section:merchant-alerts:read:*",
  "cm:section:customer-search:read:*",
  "cm:section:merchant-search:read:*",
  "cm:section:report:read:*",
  "cm:section:report:create:*",
  "cm:section:settings-queue:create:*",
  "cm:section:settings-queue:read:*",
  "cm:section:settings-queue:update:*",
  "cm:section:settings-queue:delete:*",
  "cm:section:settings-automation:create:*",
  "cm:section:settings-automation:read:*",
  "cm:section:settings-automation:update:*",
  "cm:section:settings-automation:delete:*",
  "cm:section:settings-report-template:create:*",
  "cm:section:settings-report-template:read:*",
  "cm:section:settings-report-template:update:*",
  "cm:section:settings-report-template:delete:*",
  "cm:section:settings-slas:create:*",
  "cm:section:settings-slas:read:*",
  "cm:section:settings-slas:update:*",
  "cm:section:settings-slas:delete:*",

  "cm:action:event-status:create:*",

  "cm:action:event-queue:create:*",
  "cm:action:event-user:create:*",
  "cm:action:event-note:create:*",
  "cm:action:event-posneg:create:*"



```

```

"cm:action:event-export:create:*",

"cm:element:tenant:read:*",
"cm:resource:configuration:read:*",
"cm:resource:configuration-automation:read:*",
"cm:resource:language:read:*",
"cm:resource:language-message:read:*",
"cm:resource:message:read:*",
"cm:resource:session:create:*",
"cm:resource:session:read:*",
"cm:resource:session:update:*",
"cm:resource:session:delete:*",
"cm:resource:event:read:*",
"cm:resource:event-status:create:*",
"cm:resource:event-user:create:*",
"cm:resource:event-queue:create:*",
"cm:resource:event-note:create:*",
"cm:resource:event-posneg:create:*",
"cm:resource:event-export:read:*",
"cm:resource:report:create:*",
"cm:resource:report:read:*",
"cm:resource:report-template:create:*",
"cm:resource:report-template:read:*",
"cm:resource:report-template:update:*",
"cm:resource:report-template:delete:*",
"cm:resource:file:create:*",
"cm:resource:file:read:*",
"cm:resource:locale:read:*",
"cm:resource:timezone:read:*",
"cm:resource:status:read:*",
"cm:resource:status-reason:read:*",
"cm:resource:user:read:*",
"cm:resource:queue:create:*",
"cm:resource:queue:read:*",
"cm:resource:queue:update:*",
"cm:resource:queue:delete:*",
"cm:resource:automation:create:*",
"cm:resource:automation:read:*",
"cm:resource:automation:update:*",
"cm:resource:automation:delete:*",
"cm:resource:sla:create:*",
"cm:resource:sla:read:*",
"cm:resource:sla:update:*",
"cm:resource:sla:delete:*",
"cm:resource:tenant:read:*"
1
}

```





danger

The `security.json` is formatted in JSON, so you should make sure that it is a well-formatted JSON file before trying to use it within Case Manager.

Learn More [📖](#)

Learn more about Case Manager's security in the [Security Configuration](#).