

On this page

Search/Listing Page

This page describes the Form (used only in Search) and Table schemas (used by Listing and Search)

Search Config Schema

Property	Type	Optional	Description
form	Object	No	Object with the properties to configure the fields that appear on the search page. Please check the Form Schema section for more details about the schema.
table	Object	No	Object with properties to configure the table to show the search results. Please check the Table Schema section for more details about the schema.
exportButton	Object	Yes	Object to configure the export button. Please check the Export Resources page for more details about this configuration.
searchOnLoad	Boolean	Yes	Enables or disables a search to be done when the page is loaded, without pressing the search button.
maxFilters	Number	No	If configured, allows you to set a maximum number of filters used in the search.
channels (since v8.0)	Object	Yes	Extends the configuration defined in by the Table property. Please check Channel Schema for more details.

Listing Config Schema

Property	Type	Optional	Description
table	Object	No	Table configuration, please check the Table Schema section for more details about the schema.
channels (since v8.0)	Object	Yes	Extends the configuration defined in by the Table property. Please check Channel Schema for more details.

Form Schema

Property	Type	Optional	Description
fieldPerRow	Number	Yes	Number of fields that should appear per line.
searchButtonTitle	String	Yes	Search button title.
searchButtonCssClass	String	Yes	Search button CSS classes, separated by space.
searchButtonKind	String	Yes	Search button kind [default , primary, danger, warning, success, info]
iconCssClass	String	Yes	Search button icon CSS class.
resetButtonTitle	String	Yes	Reset button title.
resetButtonCssClass	String	Yes	Reset button CSS classes, separated by space.
resetButtonKind	String	Yes	Reset button kind [default , primary, danger, warning, success, info]
advancedSearchButton	Object	Yes	Advanced search button configuration object. This object can have these properties .
fields	Array<Object>	Yes	List of form fields. Each item is an object that can have these properties .

Property	Type	Optional	Description
advancedFields	Array<Object>	Yes	List of advanced fields. This fields are hidden by default and only become visible when the user click the button to expand them. Each item is an object that can have the same properties as the fields' properties.

advancedSearchButton🔗📄

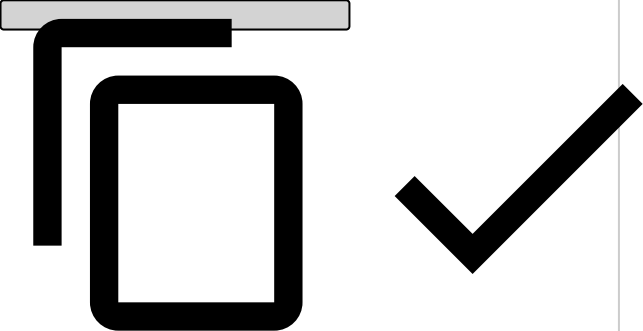
Property	Type	Optional	Description
title	string	Yes	Advanced search button title.
cssClass	string	Yes	Advanced search button CSS classes, separated by space.

fields🔗📄

Property	Type	Optional	Description
title	string	Yes	Field title.
type	string	Yes	Field type. Please check the Fields section to see all the available types.
cssClass	string	Yes	Field CSS classes, separated by space.
kind	string	Yes	Button kind [default , primary, danger, warning, success, info]
placeholder	string	Yes	Field placeholder.
key	string Array<string>	No	Data object key that this field will use to filter the data. Multiple keys might be used to filter the data. E.g: "id eq X OR name eq X" Since v8.0 when Case Manager is running in Omnichannel mode we need to identify what fields are Common or Channel specific. we do this by prefixing the Channel Id to the field key. E.g: **channel1#**field1
filter	string	No	Filter operator to be used in the query string along with this field. The available filters can be found here .
permissions	string Array<string>	Yes	Specifies the necessary user permissions to view this field. When passing a list of permissions, the user must have all the permissions in order to view the field.
required (Since 10.2.0)	Boolean	Yes	Used only on the event search page to make fields mandatory. Fields with this property set to "true" are flagged with a red indication next to the title. If users select the search button without completing these fields, a message is displayed.

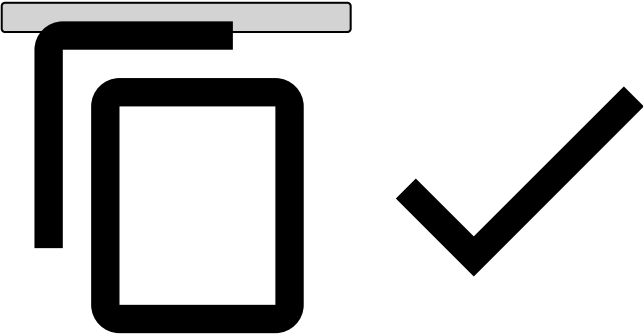
Table Schema🔗📄

Property	Type	Optional	Description
bulkActionsConfig	Object Array<Object>	Yes	Configures the bulk actions. This property accepts an object or a list of objects of type Alert Button List .
bulkActionsConfig	Object Array<Object>	Yes	Configures the bulk actions. This property accepts an object or a list of objects of type Alert Button List .
inlineActions	Array<Object>	Yes	List of inline actions that will be mapped into small button icons and be placed in each table row. Each action will only take effect on a specific alert, instead of a set of alerts like the previous property. Each inline action must be an object with these properties .

Property	Type	Optional	Description
columns	Array<Object>	No	List of columns that should appear in the Table. Each column is represented by an object that can have these properties .
filter	String	Yes	Query string to filter the initial table values. Available filters can be found here .
filters (since v8.0)	Object	Yes	Filter object that is used to filter the initial table values in Omnichannel. Since we can filter by common or specific fields we need to specify the filter as: <pre>{ "COMMON": "alerts eq 'true'", "o4b": "customer_id eq 1234" }</pre> 
orderBy	String	Yes	Initial data order. This string must be have the following format: "{column_key}{sort_direction}". E.g. "fieldname asc".
sortable	Boolean	Yes	Whether the table can be sortable or not.
resultsInfoItemsText	String	Yes	Custom label to be added after the total number of data items.
selectedRowsInfoText	String	Yes	Custom label to be added after the total number of selected rows.
showNumberOfResults	Boolean	Yes	Whether the Table shows the total number of results or not.
showNumberOfSelectedRows	Boolean	Yes	Whether the Table shows the number of selected rows or not.
showNumberOfResultsPerPage	Boolean	Yes	Whether the option of choosing the number of rows per page is enabled or not.
cssClass	String	Yes	Custom CSS classes, separated by spaces.
quickFilters	Array<Object>	Yes	List of filters to quickly filter the table values. Each object must have these properties .
quickPreview	String	Yes	Enables the quick preview functionality. Points to a details page configuration or to a drawer configuration. Learn more about the Quick Preview .
linkTo	String	Yes	Specifies the first route level where one should be redirected when clicking in a table row.
resultsPerPageList	Array<Integer>	Yes	Overrides the default list of results per page.
limit	Integer	Yes	Initial number of items that should appear in the table.
fixedRowSelection	Boolean	Yes	The column to select table rows is fixed by default. Set the value of this property fo false to change that default behaviour.
verticalScroll	Boolean	Yes	Adds vertical scroll within the table.

Property	Type	Optional	Description
maxHeight	Number	Yes	Sets the table's max height. This is going to be applied only when vertical scroll is set (see property above).

inlineActions

Property	Type	Description
label	String	Action label. (Please note that from v10.1 it is important that you configure this field in order for the title to appear on the Inline Actions dropdown)
type	String	The action type. Currently, we only support the following type of actions: state - Action to change the alert state move-to-queue - Action to move a set of alerts to a queue assign-to-user - Action to assign a user to a set of alerts link-event-case - Action to link an event to a case. This should only be added to a table of events. unlink-event-case - Action to unlink an event from a case. This should only be added to the Link Events table of the Case Details page. reveal-all - Action that allows the users to unlock all fields for a given Event. This action is only meant to be used in Event Tables and as an inline action.
statusId	String	The alert status unique identifier assigned to this action. Note: This property is only required when defining an action of type "state"
iconCssClass	String	(Optional) Icon CSS class to give the action button an icon.
kind	String	(Optional) Inline action kind [default , primary, danger, warning, success, info]
permissions	Array<String>	(Optional) Holds a set of permissions the user must have in order to see and act over the action being configured here. The permissions added in this property are a complement to the permission "cm:action::create:*". This means that you don't need to add that permission to this set, because it will be evaluated anyway. Example <pre>{ "label": "For the following inline action", "type": "state", "statusId": "fraud", "permissions": ["cm:channels:aml:create:*", "cm:action::state:create:*", "cm:channels:aml:create:*"] }</pre> 

columns^â

Property	Type	Optional	Description
title	String	Yes	Column header label.
cssClass	String	Yes	Custom class names, separated by spaces.
headerCssClass	String	Yes	Custom class names, separated by spaces, to be added to the column header.
cellCssClass	String	Yes	Custom class names, separated by spaces, to be added to each column cell.
type	String	Yes	The type of data for each column cells. This type will be used by the formatter function to format the data. Example of types: "string", "timestamp", "currency",...
key	String	No	The key used to fetch the field value from the data object. If configuring a column of type template or custom, it is not required to provide a path to the data object but instead you can provide any string you like.
sortable	Boolean	Yes	Whether the column is sortable or not.
dynamicCssClassKey	String	Yes	Contains a key to the data object. If present, it will add a CSS class with the cell key and the value of the key passed in this property. The CSS class will have the following template: "fdz-css-{key}-{data[dynamicCssClassKey]}".
cellAttributes	Object	Yes	HTML attributes to be added to each <td> element. E.g. <code>{title: "Title"}</code> will produce the following HTML attributes: <code><td title="Title"></code>
headerTooltip	String	Yes	l18n key to the message that should appear in the tooltip for the column title.
cellTooltip	Object	Yes	Object with properties to configure a tooltip when hovering a table cell. This object must contain the following properties: * key (String) - Path to the value in the data object * type (String) - Data type. Please check the Data Types section to see all the available types.
linkTo	String	Yes	Specifies a link for each cell of the column. Supports template data type to format the URL.
permissions	string Array<string>	Yes	Specifies the necessary user permissions to view this column. When passing a list of permissions, the user must have all the permissions in order to view the column.
totalThreshold	Integer	Yes	When present, enables the Best Effort Count .
fixed	String	Yes	Possible values are: "left" and "right". It is recommended to add the "left" flag on the first columns and the "right" flag on last columns of the table.

quickFilters^â

Property	Type	Optional	Description
title	string	Yes	Field title. (Please note that from v10.1 it is important that you configure this field in order for the title to appear on the Quick Filters UI)
type	string	Yes	Field type. Please check the Fields section to see all the available types.
cssClass	string	Yes	Field CSS classes, separated by space.
placeholder	string	Yes	Field placeholder.
key	string	No	Data object key that this field will use to filter the data. Since v8.0 when Case Manager is running in Omnichannel mode we need to identify what filters are Common or Channel specific. we do this by prefixing the Channel Id to the field key.

Property	Type	Optional	Description
			E.g: channel1#field1
permissions	string Array<string>	Yes	Specifies the necessary user permissions to view this filter. When passing a list of permissions, the user must have all the permissions in order to view the filter.
filter	string	No	Operator that should be used when comparing the value of the filter. Can be of one: eq (Equal) eqb (Equal Boolean) gt (Greater Than) gte (Greater Than or Equal) gteq (Greater Than or Equal) ieq (Equal Ignore case) lt (Less Than) lte (Less Than or Equal) lteq (Less Than or Equal) neq (Not Equal) neqb (Not Equal Boolean) in (a shorthand for multiple OR conditions)
defaultValue	Object String	Yes	The default value option is supported both for Datepickers (since v10.2.1) and Select fields. Example: Datepicker: `` ` "defaultValue": {} "type": "subtractTime", "value": 1, "unit": "year" {} ` `` Select: `` ` "defaultValue": {} "label": "placeholder.assigned.all" {}, ``

Channels Schema

Property	Type	Optional	Description
{ChannelId}	Object	Yes	The Channel Id is a dynamic property that match's the channel identifier defined in the backend configuration. The properties defined in this object follow the Table Schema and extend (overriding the existing ones and adding the new properties) the configuration defined by the table property.