

On this page

Resources

In order for the application to know where it should fetch the data needed to populate certain parts of it, it is necessary to specify a set of resources with information about where the data should be fetched from.

By default, a list of core resources is already defined as part of the application configuration. However, those default resources can be extended or overridden.

Before listing the core resources, it is important to explain how a resource is represented. A resource is an object that should contain a property called **endpoint**, which is a not optional string, that contains the path to the endpoint that must be used to retrieve the data for this resource.

The list of core resources are the following:

Resources


```
{
  selectMerchant: {
    endpoint: "/api/entity/select-merchant"
  },
  note: {
    endpoint: "/api/event-note"
  },
  reason: {
    endpoint: "/api/status-reason"
  },
  selectTerminal: {
    endpoint: "/api/entity/select-terminal"
  },
  pnlists: {
    endpoint: "/api/event-posneg"
  },
  timezone: {
    endpoint: "/api/timezone"
  },
  selectMcc: {
    endpoint: "/api/entity/select-mcc"
  },
  locale: {
    endpoint: "/api/locale"
  },
  automationConfig: {
    endpoint: "/api/configuration/automation"
  },
  selectChannel: {
    endpoint: "/api/entity/select-channel"
  },
  automation: {
    endpoint: "/api/automation"
  },
  file: {
    endpoint: "/api/file"
  },
  selectStatus: {
    endpoint: "/api/status"
  },
}
```

```
selectCardBin: {
  endpoint: "/api/entity/select-cardbin"
},
eventUser: {
  endpoint: "/api/event-user"
},
restorePassword: {
  endpoint: "/api/session/restore"
},
state: {
  endpoint: "/api/event-status"
},
event: {
  endpoint: "/api/event"
},
eventReport: {
  endpoint: "/api/event-report"
},
eventReportReadOnly: {
  endpoint: "/api/event-report/readonly"
},
selectCustomer: {
  endpoint: "/api/entity/select-customer"
},
merchant: {
  endpoint: "/api/entity/merchant"
},
sla: {
  endpoint: "/api/sla"
},
selectUser: {
  endpoint: "/api/user"
},
reportTemplate: {
  endpoint: "/api/report-template"
},
session: {
  endpoint: "/api/session"
},
eventQueue: {
  endpoint: "/api/event-queue"
},
report: {
  endpoint: "/api/report"
},
queue: {
  endpoint: "/api/queue"
},
tenant: {
  endpoint: "/api/tenant"
},
userQueues: {
  endpoint: "/api/queue-user/user-queues"
},
reviewNext: {
  endpoint: "/api/event/review/next"
},
getCurrent: {
  endpoint: "/api/event/review/current"
},
extension: {
  endpoint: "/api/extension/action"
},
assignQueues: {
```

```

    endpoint: "/api/queue-user/assign-queues"
  },
  generate2FAConfig: {
    endpoint: "/api/session/generate-config"
  },
  validate2FAConfig: {
    endpoint: "/api/session/validate-config"
  },
  reset2FAConfig: {
    endpoint: "/api/session/reset-config"
  },
  replace2FAConfig: {
    endpoint: "/api/session/replace-config"
  },
  customers: {
    endpoint: "/api/entity-data/customers",
  },
  entityFile: {
    endpoint: "/api/entity-file",
  },
  cards: {
    endpoint: "/api/entity-data/cards",
  },
  accounts: {
    endpoint: "/api/entity-data/accounts",
  }
}

```

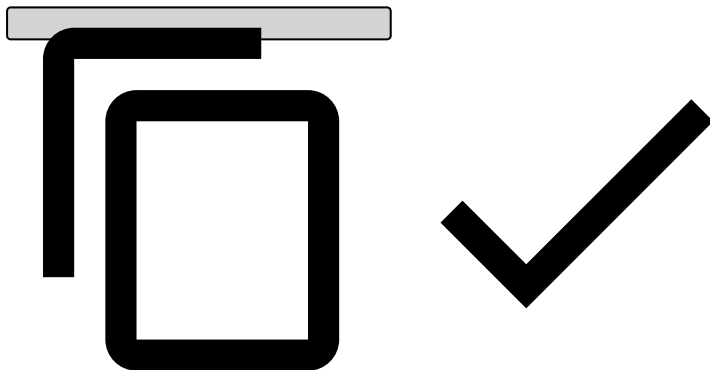


To override an existing resource, one just has to add an entry, in the configuration resources object, with the same name as the resource being overridden and a new endpoint. Example:

Resource override [↗](#)

```

{
  ...
  resources: {
    queue: {
      endpoint: "api/queue2"
    }
  }
  ...
}

```

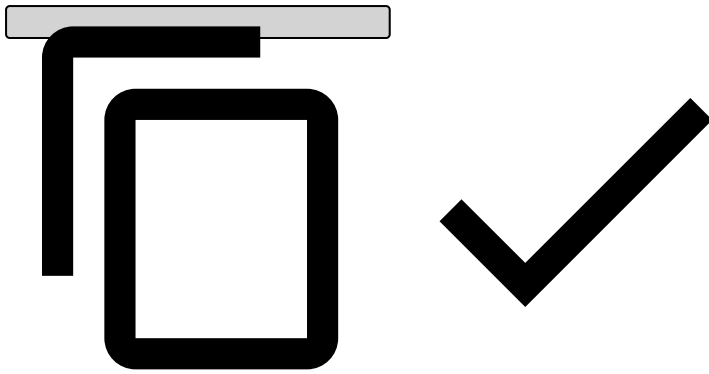

To add new resources, the procedure is the same except for the resource name, which should be unique.