

On this page

Self-Service Rules Config

Starting from Case Manager 6.0, some of the features available for the Self-Service Rules can be configured.

Root Configuration

ruleDetails	object	no	Holds the set of properties to configure some of the sections in the rule details page. For more info, please check the Rule Details section.
pollingInterval	number	yes	Holds the polling interval (in milliseconds) used to update the SSR listing and details page. Default value: 2000 From 10.2.0 Case Manager will wait until the last request is resolved before sending another one: • Case 1: Client sends a request to Backend. The Backend takes more than 2 seconds to resolve the request. Client tries to send another request after 2 seconds but since the Backend hasn't resolved the last request yet it will wait until the request is resolved. • Case 2: Client sends a request to Backend. The Backend takes less than 2 seconds to resolve the request. After 2 seconds, since the last request already was resolved it will send another request.

Rule Details

latestTest	object	no	Holds the set of properties to configure the latest test section, in the rule details page. For more info, please check the Latest Test section.
------------	--------	----	--


Latest Test

metrics	object[]	no	Holds the set of metrics that should appear in the Latest Test section. Each metric can have the properties defined in the Metric section.
---------	----------	----	--

Metric

title	string	no	Holds the key that points to the metric title.
metric	string	no	Holds the metric type. The available metrics are: • "hit-rate" - Percentage of events processed that triggered the rule tested. • "hit-rate-count" - Absolute number of events processed that triggered the rule tested. • "amount-hit" - Sum of the amount captured by the rule in the events processed. • "hit-breakdown"* -

			• "fpr" - Percentage of the false positives compared with the real true negatives. • "precision" - Percentage of the true positives compared with what we believe to be true positives. *Please check the Hit-Breakdown section.
type	string	no* *It's only optional when the metric type is "hit-breakdown". Please check the Hit-Breakdown section.	Holds the metric value type. Please check the Data Types section to see the supported value types. <i>Ps: When choosing the template data type, the only property available in the templateString is the value property.</i>
roundPrecision	number	yes	Holds the round precision for metrics that show percentages (e.g. "hit-rate" metric).

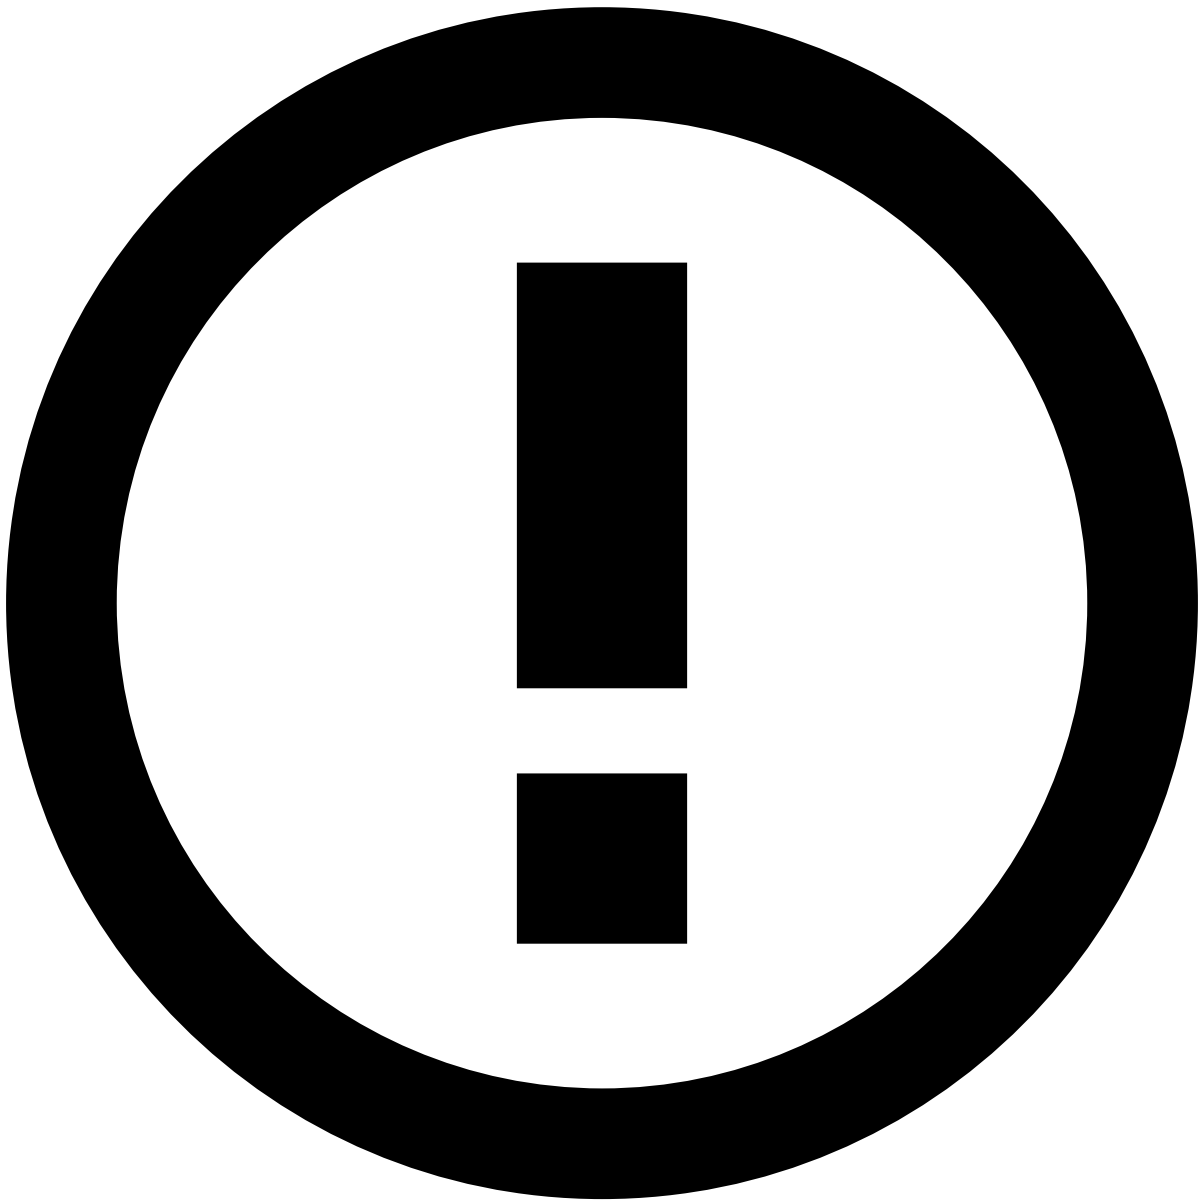

info

Note that depending on the value for the property **type**, more properties might be required to be added to the metric object. If it is the case, then the required properties are listed in the [Data Types](#) section.

Hit-Breakdown[ⓘ]

When configuring a "hit-breakdown" metric, you don't need to configure the property **type** in the metric object. Instead, you need to configure the **outcomes** property. This property holds the set of outcomes to be presented in the UI, in the context of this metric. It can have the following properties:

label	string	no	Holds the label that represents the outcome value. Note that this label doesn't need to be translated.
outcome	string	no	Holds the outcome value.
color	string	yes	Holds the color that the hit value for this outcome should have in the UI. Here you can find the supported colors.

			You can either use the color name* or its hexadecimal code. The color name must be in lowercase (e.g. Blue → blue).
--	--	--	---

Suggestions

Metrics configuration

In this section, we share with you the configuration required to configure the Latest Test section as it appears in the following screenshot.

Latest Test section example

Latest Test section configuration

```
{
  ...,
  "ruleDetails": {
    "latestTest": {
      "metrics": [
        {
          "title": "ssr.test-results.hit-rate",
          "metric": "hit-rate",
          "type": "template",
          "templateString": "{{value}}%"
        },
        {
          "title": "ssr.test-results.hit-rate-count",
          "metric": "hit-rate-count",
          "type": "text"
        },
        {
          "title": "ssr.test-results.hit-rate-amount",
          "metric": "amount-hit",
          "type": "currency",
          "currencyCode": "USD"
        },
        {
          "title": "ssr.test-results.hit-rate-count-outcome",
          "metric": "hit-breakdown",
          "outcomes": [
            {
              "label": "false",
              "outcome": "false",
              "color": "red"
            },
            {
              "label": "true",
              "outcome": "true",
              "color": "green"
            }
          ]
        }
      ]
    },
    {
      "title": "ssr.test-results.fpr",
      "metric": "fpr",
      "type": "template",
      "templateString": "{{value}}%",
      "templateConfig": {
        "keyTypes": {
```

```
        "value": "text"
      },
      "allRequired": true
    }
  },
  {
    "title": "ssr.test-results.precision",
    "metric": "precision",
    "type": "template",
    "templateString": "{{value}}%",
    "templateConfig": {
      "keyTypes": {
        "value": "text"
      },
      "allRequired": true
    }
  }
],
}
}
```

