

On this page

Entity History

Properties^â

title	String	No	l18n key to the widget title.
cssClass	String	Yes	Widget custom class names, separated by space.
checkboxLabel	String	Yes	l18n key to the checkbox label.
name	String	No	A unique identifier representing the widget. It is a mandatory prop if resource is present.
resource	String	No	Resource name that points to the endpoint that populates the widget. Supports template data type to format the URL.
filter	String	Yes	Filter for the external resource. Supports template data type to format the string.
orderBy	String	Yes	OrderBy for the external resource. Supports template data type to format the string.
limit	Number	Yes	Limits the number of results for the external resource.
tableConfiguration	Object	No	Table configuration which supports these properties .
selectConfiguration	Object	Yes	Select to filter the data in the table. This object that can contain these properties .
timestampSelectConfiguration	Object	No	Select to filter the timestamp from which the events must be fetched. Please see more details in here.
legacyHistory	Boolean	Yes	When set to true, enables the use of the old related transactions endpoint (<code>api/event</code>) instead of the new one (<code>api/related-transactions</code>)
exportButton (since v8.2.0)	Object	Yes	Object to configure the export button. Please check the Export Resources page for more details about this configuration.
rulesFilterAlwaysVisible	Boolean	Yes	When set to true, the related transactions rules filter is always visible on the widget header
rulesFilterTooltipLabel	String	Yes	l18n key to the related transactions rules filter helper tooltip description

tableConfiguration^â

Same as the [Table](#) widget, except for the *title*, *key*, *cssClass* and *selectConfiguration* properties that are not necessary.

Additionally, you can configure bulk and inline actions, un-fix the row selection column, add vertical scroll and quickFilters using the following properties:

inlineActions	Array<Object>	Yes	List of inline actions that will be mapped into small button icons and be placed in each table row. Each action will only take effect on a specific item. Each inline action must be an object with these properties .
bulkActions	Array<Object>	Yes	Configures the bulk actions. Please check the Alert Button List section to see the available properties.
fixedRowSelection	Boolean	Yes	

			The column to select table rows is fixed by default. Set the value of this property to false to change that default behaviour.
verticalScroll	Boolean	Yes	Adds vertical scroll within the table.
maxHeight	Number	Yes	Sets the table's max height. This is going to be applied only when vertical scroll is set (see property above).
quickFilters	Array<Object>	Yes	List of filters to quickly filter the table values. Each object must have these properties .
quickPreview	String	Yes	Enables the quick preview functionality. Points to a details page configuration or to a drawer configuration. Learn more about the Quick Preview .

selectConfiguration[Ⓐ]

renderType	String	Yes	Defines which text should appear in the select options. The possible values for this property are: "label", "value" or "label-value".
values	Array<Object>	Yes	List of initial values. Each item must be an object with the following properties: • value (string) - Value of one of the select options
options	Array<Object>	Yes	List of options. Each item must be an object with the following properties: • label (string) - Option label. • value (string) - Option value. If this is a conditional filter, it should contain an unique key to be used as a key for the conditional object • sourceValue(string) - The key in the data object, of the entity item, that corresponds to the same key as defined in value property. This is only useful when this widget has a different resource from the one in the detailed page, where this widget is being presented. • path (string) - Since version 8.2 if the value referenced by the value is an array we can specify the value for each element. Example: ◦ Event payload <pre> { id: "eventCM", relatedTransactions: [{ id: "id_of_the_transaction" }, { id: "id_of_the_transaction2" }] } </pre> • Configuration <pre> selectConfiguration: { options: [{ value: "relatedTransactions", path: "id" }] } </pre>

			<pre> }] } </pre>
multi	Boolean	Yes	Whether the select allows multiple values or not.
canContainNulls	String	Yes	This property can take 3 values and is used to determine if we should update the table when the quick-filters have null values: • all: means that all fields values can be null, this is also the default in case anything is defined; • some: means we can have fields null with null values but at least one can't be null; • none: means that no field value can be null;
conditional	Object	Yes	Object to configure the conditional filter. This object must contain a key that it's the same as the value passed in the options . Each key has as value an object that can contain these properties .

conditional🔗📄


field	String	No	The field of the details object that will be used to do the comparison
compare	Array<String>	No	An array of keys of the entity-history resource.

Conditional example

```

conditional: {
  "<KEY>": {
    field: "name",
    compare: ["field1", "field2"]
  }
}

```

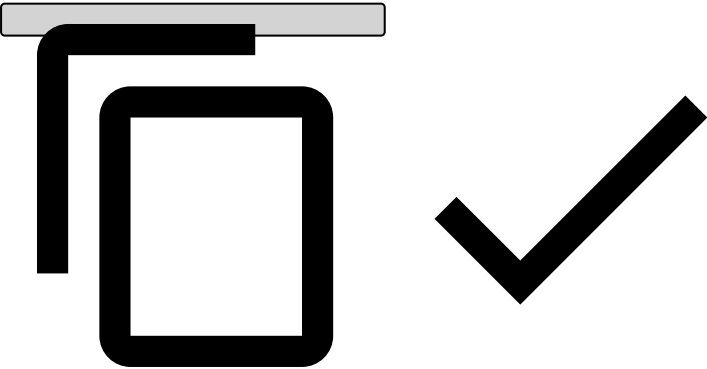

timestampSelectConfiguration🔗📄

```


"timestampSelectConfiguration": {
  "filter": "gteq",
  "options": [
    {
      "label": "placeholder.all.time"
    },
    {
      "label": "placeholder.last.day",
      "value": {

```

```

        "type": "subtractTime",
        "value": 1,
        "unit": "day"
    }
},
"defaultvalue": {
    "label": "placeholder.last.day"
},
"placeholder": "placeholder.timestamp",
"renderType": "label",
"type": "select",
"il8n": true,
"key": "timestamp",
"multi": false
}

```

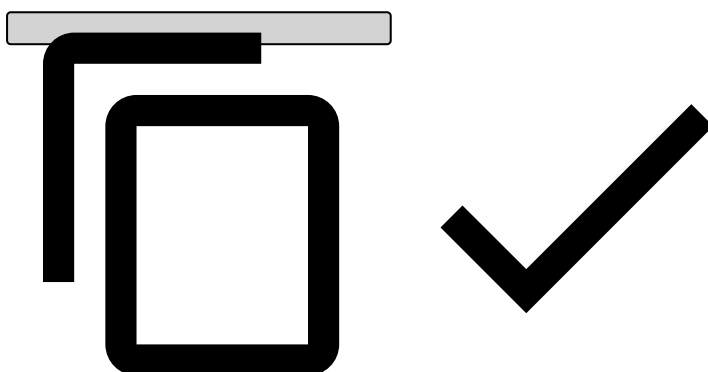

Please read the configuration settings for the options and defaultvalue properties in [here](#), in the sections "Configuring the select options values" and "Configuring the select default value" .

channels^â

The channels property lets you define in what events this Widget will be displayed and also what tabs should be displayed. For each tab you can define a specific Table configuration.

Since **version 8.2** two new properties are now available:

Property	Types	Optional	Description
tabPos	String	Yes	This property lets you define the order of the tabs. If this property the order is not guaranteed.
visibleTabs	String	Yes	Lets you define which tabs can be visible for each details page independently of the widget visibility.

Example:

```

channels: {
    "o4b": {
        tabPos: 2
        visibleTabs: ["cmp, open_banking"]
    },
    "cmp": {
        tabPos: 1
    },
    "open_banking": {}
}

```

