

On this page

Widgets

In this section, you will have a better understanding of Case Manager widgets, its properties and configuration.

Summary

Widget	Purpose
toplevel	top bar
box	box
map	
table	
list-box	
container	include other widgets
entity-history	
activity	
iframe	
paginated-widget	
notes	
genome	Display details from Genome's link analysis

Common properties that are shared between all widgets:


matchingFields

When present, this property will be used to check whether the widget should be displayed or not. In order the widget to be displayed, all the fields are compared with the page main data object and should match its conditions.

Each field object must have the following properties:

Property	Type	Optional	Description
key	String	No	Path in the page main data object to fetch the value.
op	String	No	Operator that should be used when comparing the two values. Can be of one: • eq (Equal) • neq (Not Equal) • gt (Greater Than) • gte (Greater Than or Equal) • lt (Lesser Than) • lte (Lesser Than or Equal)
value	Any	No	The value that will be compared with the value from the page main data object.

If this property is not present, then the widget will always be displayed.

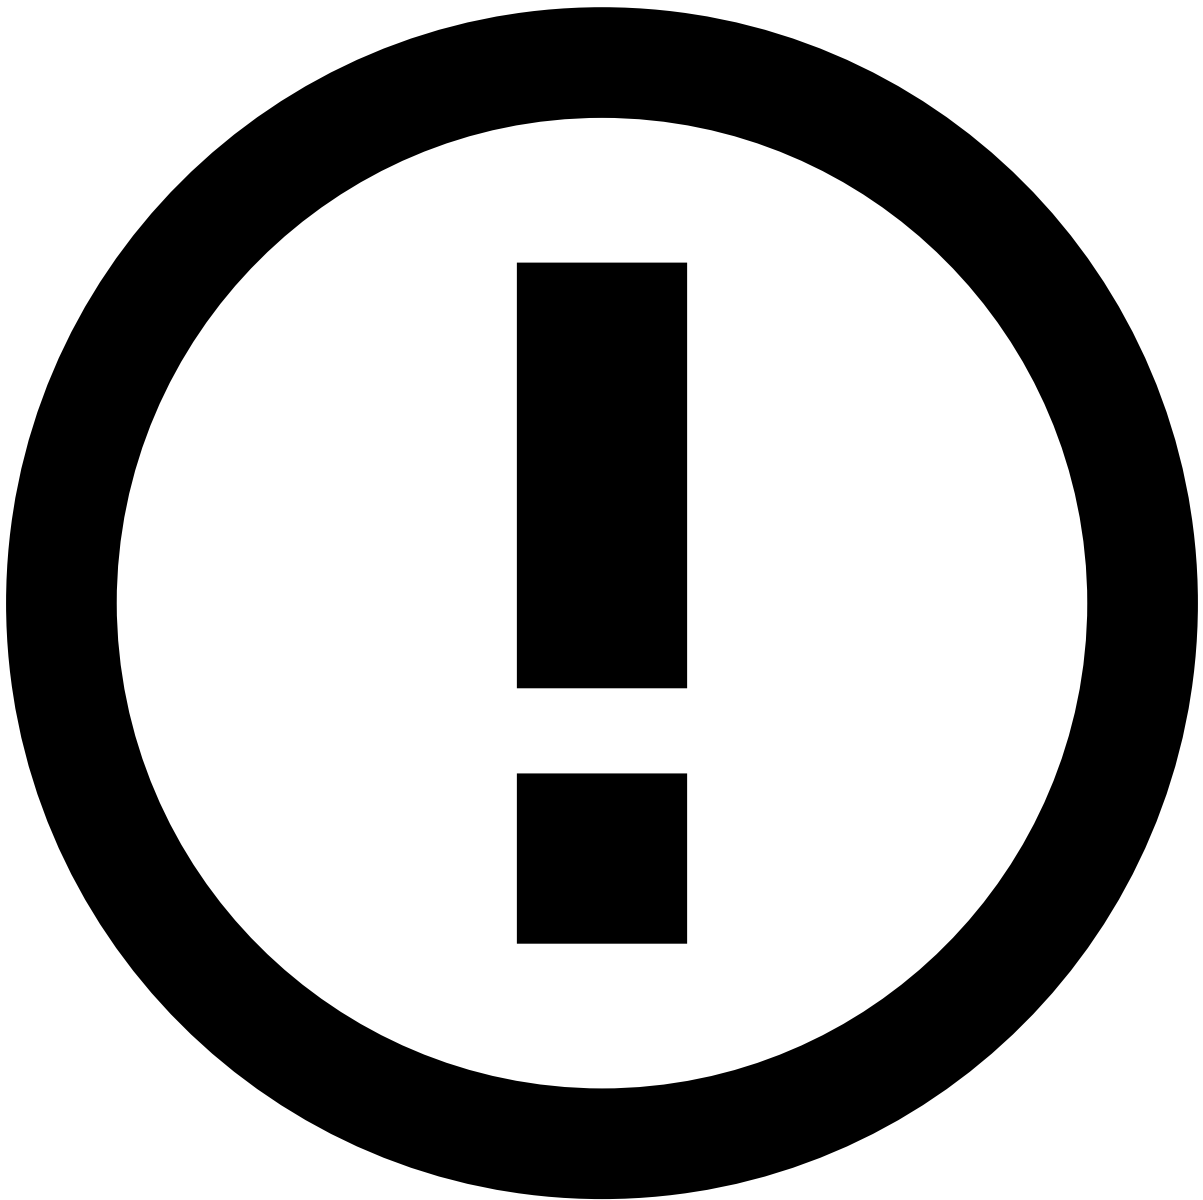

info

You can use the "null" or "undefined" values in the **value** property. The first one should be used when the value of the object data field is null and the second one can be used to test the absent of an object data field.

Condensed Widgets

When present, this property fixes the number of columns on a `BoxWidget` . If unexistent, enables the "auto-layout", where the number of columns is decided by its content.

Property	Type	Optional	Description
fieldsPerRow	Number	Yes	Fixes the number of fields per row on a <code>BoxWidget</code>

Page Anchors

When present on a widget object, the `id` and `anchored` properties:

- Adds it to the list of anchor tabs on the top bar.
- Makes it detectable by the browser as active or inactive by its percentage on the screen.


Property	Type	Optional	Description
id	String	Yes	Unique widget identifier
anchored	Boolean	Yes	Adds the widget to the list of anchors

headerActions

When present, this property adds actions to the header. Currently the supported actions are the copy to clipboard and add to list functionalities.

Copy to clipboard

Property	Type	Optional	Description
key	String	No	Path in the page's main data object to fetch the value.
type	String	No	Should be copy-to-clipboard.
title	String	No	118n key to appear on the action tooltip. Note that this key will be concatenated with the respective action type. Example: key is "Customer ID" and the action is "copy-to-clipboard", the tooltip to be show would be something like "Copy Customer ID".
icon	String	Yes	The icon to represent this action on the widget header.

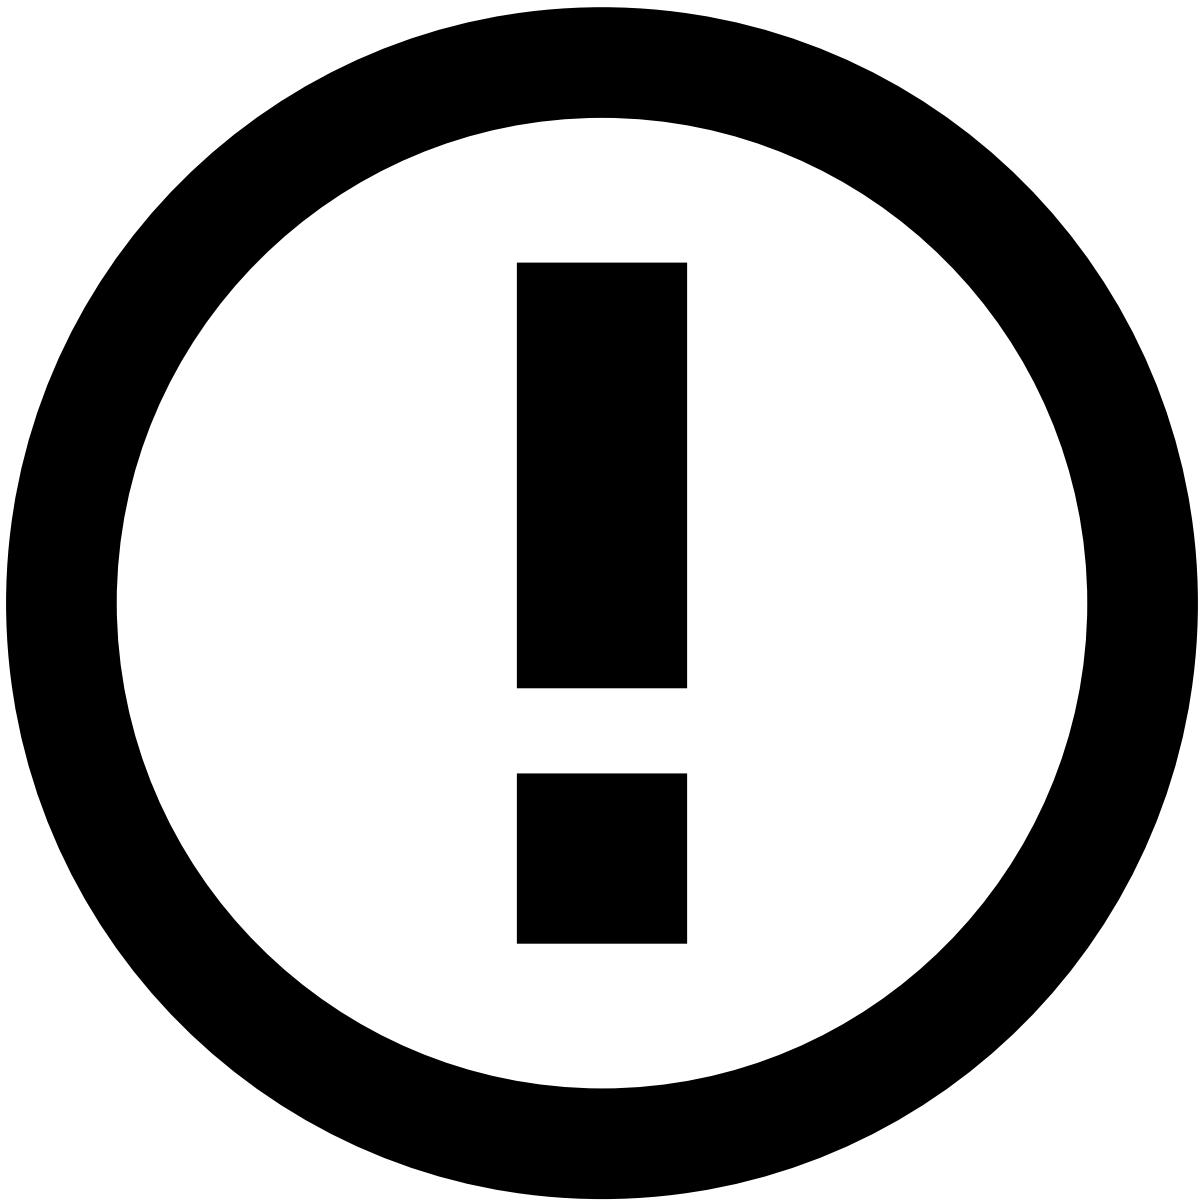

info

In order for the **title** property to render correctly, the `tooltip.copy-id` has to be similar to "Copy %s", where `%s` is replaced by the value defined for **title**.

Add to list📄📄

Property	Type	Optional	Description
key	String	No	Path of the entity to add to a list.
type	String	No	Should be add-to-list.
title	String	No	Tooltip that should be shown when the user hovers the icon


Link To

Property	Type	Optional	Description
url	String	No	The URL to where the user is redirected when the action is clicked.
type	String	No	Should be link .
newPage	Boolean	Yes	Opens a new tab or redirects the user to a page inside Case Manager.

Collapsible Widget

When present on a widget's object, this property enables/disables the collapsible widget functionality. This allows the users to collapse the widget information when it is not needed for the investigation.

This feature is enabled by default since version **Case Manager 11.2** but it can be disabled per widget if necessary.

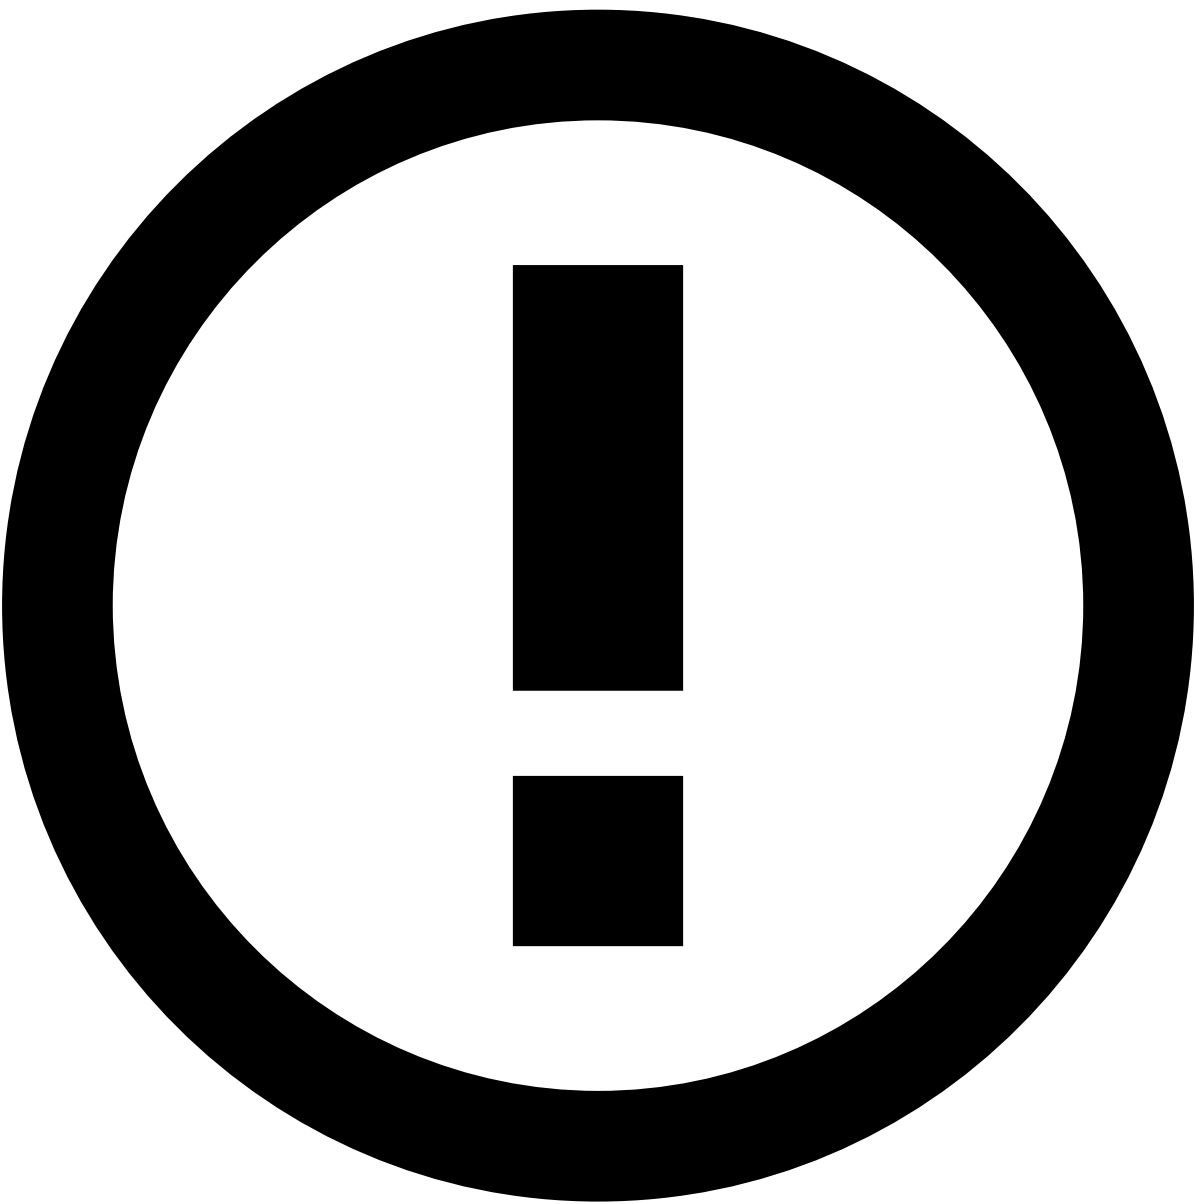

Note

Make sure that you configure the height of the [Iframe](#) and [Map](#) widgets.

Property	Type	Optional	Description
collapsible	Boolean	Yes	Enables or disables the collapsible widget functionality.