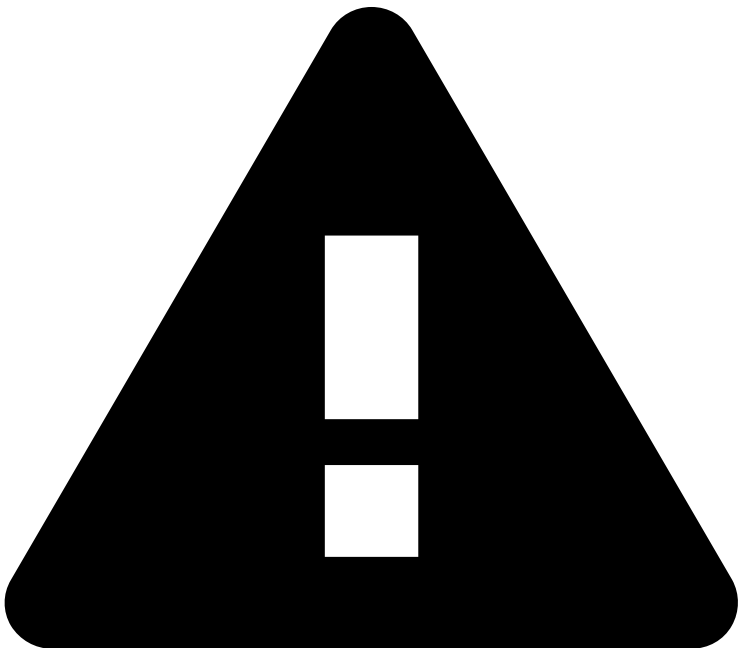


On this page

Table

Properties

title	String	No	Id key to the table title.
key	String	No	Path in the data object to fetch the values to populate the table.
cssClass	String	Yes	Custom CSS classes, separated by space, to be added to the table container element.
columns	Array<Object>	No	List of columns that should appear in the Table. Each column is represented by an object that can have these properties .
selectConfiguration	Array<Object>	Yes	Select to filter the data in the table. This object that can contain these properties .
showPagination	Boolean	Yes	Whether the table has pagination or not. Default: false
showPaginationInfo	Boolean	Yes	Whether the Table shows the pagination info or not. A pagination info is a string that shows things like the current page, the total number of pages, ... Default: false

resultsPerPageList	Array	Yes	Sets the number of items displayed per page when using table pagination. Default Values: [10, 20, 50, 100]  Note Setting the items per page to high values may lead to slower page performance.
sortable	Boolean	Yes	Whether each column can be sortable or not. Default: false
linkTo	String	Yes	Specifies the first route level where one should be redirected when clicking in a table row. For example: <pre>event/{id}?timestamp={timestamp}&channelId={channelId}</pre>
name	String	Yes ¹	A unique identifier representing the widget.
resource	String	Yes	Resource name that points to the endpoint that populates the widget. Supports template data type to format the URL.
filter	String OR object	Yes	Filter for the external resource. If you require a POST request a filter with an Object is supported. For Event requests on Omnichannel it is needed an object, example: <pre>{ filter: { { "COMMON": "'alert' eqb 'true' AND 'schema.customer_id' eq '{{id}}'" } } }</pre>

			<pre> "legacy": "'eventStates.status.stateId' eq 'suspicious'" }] } </pre> The channel filters and the string filter bouth support template data type to format the string.
orderBy	String	Yes	OrderBy for the external resource. Supports template data type to format the string.
orderByFallback	Array	Yes	The fallbacks of the orderBy. Please check the full documentation below in this page.
limit	Number	Yes	Limits the number of results for the external resource
totalThreshold	Integer	Yes	When present, enables the Best Effort Count .
exportButton (since v8.1.0)	Object	Yes	Object to configure the export button. Please check the Export Resources page for more details about this configuration.
listInsertion	Boolean	Yes	When enabled, it's possible to insert table cell values to a specific configurable list. To learn how to configure the column look to the listKey column property.

¹ Mandatory if **resource** is present.

Columns

Property	Type	Optional	Description
title	String	No	Id key to the column header label.
cssClass	String	Yes	Custom class names, separated by spaces.
headerClassName	String	Yes	Custom class names to be applied only to the table column header.
cellCssClass	String	Yes	Custom class names, separated by spaces, to be added to each column cell.
type	String	Yes	The type of data for each column cells. Please check the Data Types section to see the available properties.
key	String	Yes	Path to fetch the field value from the data object. Whenever configuring a column that has a template type or a custom type, it is not required to pass a string that points to a property that exists in the data object, it can any string you like.
fallbackKey	String	Yes	Path to fetch the field value from the data object, if <code>key</code> value returns null or an undefined value. This property is only available if column type is equal to <code>text</code> .
sortable	Boolean	Yes	Whether the column is sortable or not.
dynamicCssClassKey	String	Yes	

Property	Type	Optional	Description
			Contains a key to the data object. If present, it will add a CSS class with the cell key and the value of the key passed in this property. The CSS class will have the following template: <code>fdz-css-{key}-{data[dynamicCssClassKey]}</code> .
cellAttributes	Object	Yes	HTML attributes to be added to each <code><td></code> element. E.g. <code>{title: "Title"}</code> will be produce the following HTML attributes: <code><td title="Title"></td></code>
headerTooltip	String	Yes	l18n key to the column header tooltip message.
cellTooltip	Object	Yes	Configures a tooltip to appear in each column cell. This object must contain the following properties: key (String) - Path to the data object to fetch the tooltip value type (String) - Tooltip content data type. Please check the Data Types section to see the available properties.
linkTo	String	Yes	Specifies a link for each cell of the column. Supports template data type to format the URL. For example: <code>event/{id}?timestamp={timestamp}&channelId={channelId}</code>
permissions	string Array<string>	Yes	Specifies the necessary user permissions to view this column. When passing a list of permissions, the user must have all the permissions in order to view the column.
multiTenancyCheck	Boolean	Yes	If you're configuring a MT environment (<code>cm.multi_tenancy</code> is set to <code>true</code> in the configuration), you can add the property <code>multiTenancyCheck: true</code> to a field (widget, field, column, etc). This will tell the CM that the field must only be shown if: - The user has the landlord permission OR - The user is not a landlord, but he has more than 1 tenant This verification does not replace the permissions verifications, it's only added to those verifications. In a non Multi-tenancy environment, this condition is ignored.
listKey	string	Yes	The list key where the cell value will be linked to a list. The table needs the listInsertion property set to true.
fixed	String	Yes	Possible values are: "left" and "right". It is recommended to add the "left" flag on the first columns and the "right" flag on last columns of the table.

selectConfiguration🔗📄

renderType	String	Yes	Defines which text should appear in the select options. The possible values for this property are: "label", "value" or "label-value".
values	Array	Yes	List of initial values. Each item must be an object with the following properties: value (string) - Value of one of the select options
options	array	Yes	List of options. Each item must be an object with the following properties: label (string) - Option label. value (string) - Option value.
multi	bool	Yes	Whether the select allows multiple values or not.

orderByFallback🔗📄

This accepts an array of order rules to be considered along with the orderBy value.


Please check the table below to better understand the behaviour of this property:

	timestamp asc	timestamp asc	Same keys and directions, use any
--	---------------	---------------	-----------------------------------

timestamp asc			
timestamp asc	timestamp desc	timestamp asc	Same keys but different directions, use the orderBy value
status asc	timestamp desc	status asc, timestamp desc	Different keys, use both
status asc	timestamp asc, score desc	status asc, timestamp asc, score desc	Use all (different keys)
status asc	timestamp asc, status desc	status asc, timestamp asc	Use the "status" from the orderBy, ignore the fallback for that key, and use the other fallback (timestamp)

Here's an example of a configuration using the `orderByFallback` property:

```
"tableConfiguration": {
  "inlineActions": [ ... ],
  "columns": [...],
  "orderBy": "schema.fields.timestamp desc",
  "orderByFallback": ["schema.fields.timestamp desc"],
  "showPagination": true,
  "sortable": true
}
```

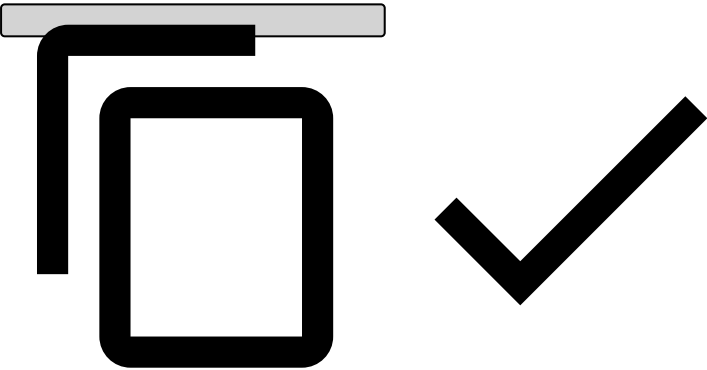

Expected Result: when the page is loaded, the results will be sorted by "schema.fields.timestamp desc" . If the user clicks in other columns (schema.fields.score asc), the results will be sorted by schema.fields.score asc , schema.fields.timestamp desc . Only the score column will be highlighted (the fallback is transparent to the user).

This is useful when the user is sorting by a column other than timestamp, i.e. not ensuring a deterministic sorting of the results.