


-

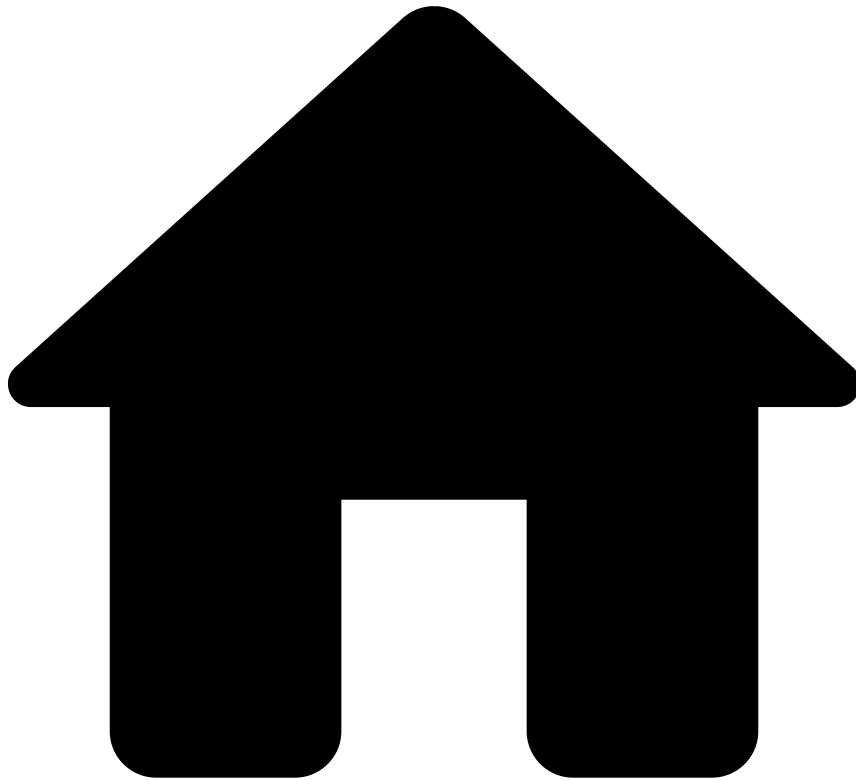

- [Core Concepts](#)
- Reasons

On this page

Reasons

When you classify an alert, you can select the reason behind your decision.

These reasons are displayed in several locations such as the alert header or the activity log. This helps analysts to quickly understand why an alert was classified with a specific state.

Note that each action (i.e. state) has a different set of reasons. Learn more about [states](#).

Learn more

Now that you understand what reasons are, learn how to use them when [acting on alerts](#).

In addition, depending on your user's permissions, you can [manage the reasons](#) used by analysts when classifying alerts.