


-

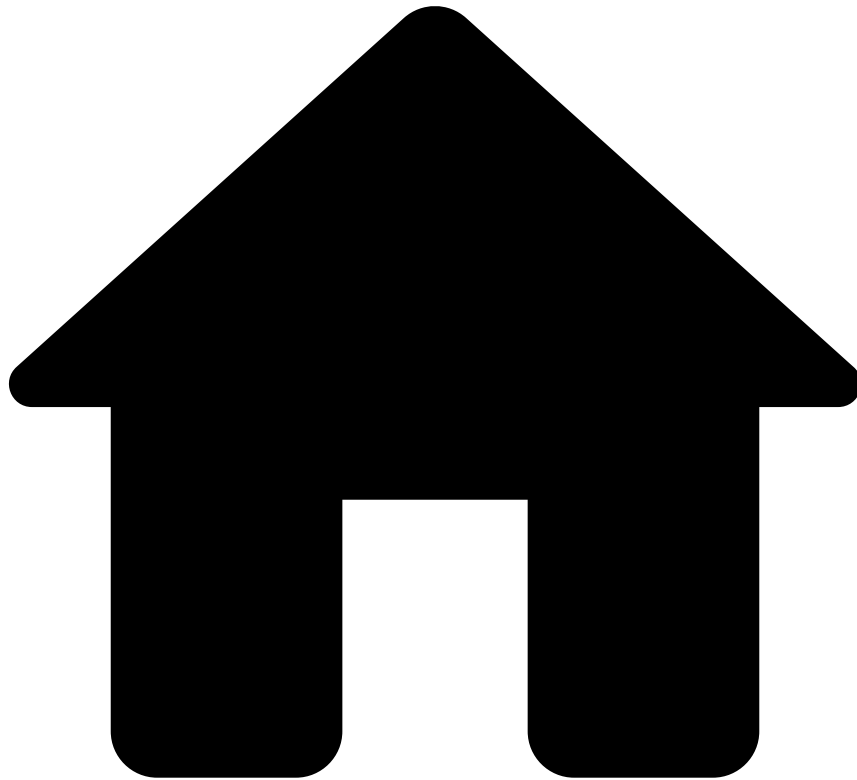

- [Analyst Guide](#)
- [Manage Self-Service Rules](#)
- Operators in Rule Writing

On this page

Operators in Rule Writing

Operators provide flexible writing capabilities that enable you to write rules according to your business needs. The Self-Service Rules (SSRs) creation form displays different operators depending on the selected conditions.

This page details the different available operators by type:

- Defined values comparison
- List values
- Schema comparison
- Strings check

Defined values comparison

These operators compare the selected field with a specific value defined in the rule. For example, you can use this operator to check if the amount is greater than or equal to 1000.


This type includes the following operators: = , != , > , >= , < , <= , **is NULL** and **is NOT NULL**.

List values

These operators allow you to validate if a field is in a **Defined** or **Custom** list.

This type includes the following operators: **IS IN Defined List**, **IS NOT IN Defined List**, **IS IN Custom List**, and **IS NOT IN Custom List**.


- The **Is IN Defined List** and **IS NOT IN Defined List** operators are used to validate if the select field is in both simple and complex lists. For example, you can use this operator to check if a customer ID is in a block list.

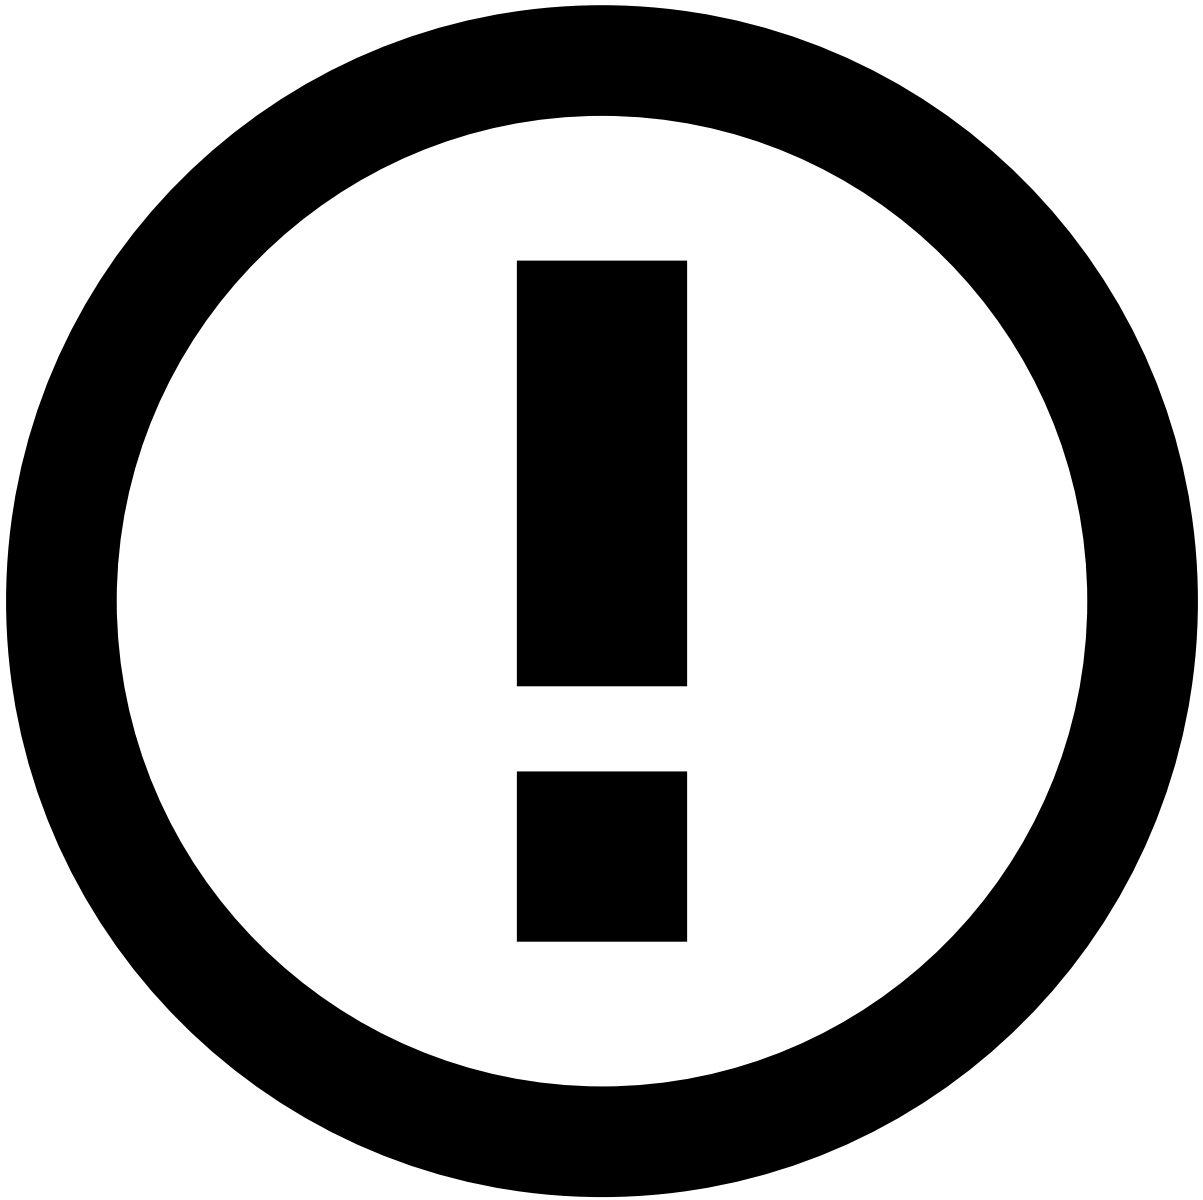

info

If you select a complex list such as the example displayed, then **Value** field is populated with the possible values according to the [list's configuration](#), for example, Block, Allow, Review.

- The **IS IN Custom List** and **IS NOT IN Custom List** operators allow you to create your own list when creating the rule. For example, you can create a custom list that includes currencies from a specific country.

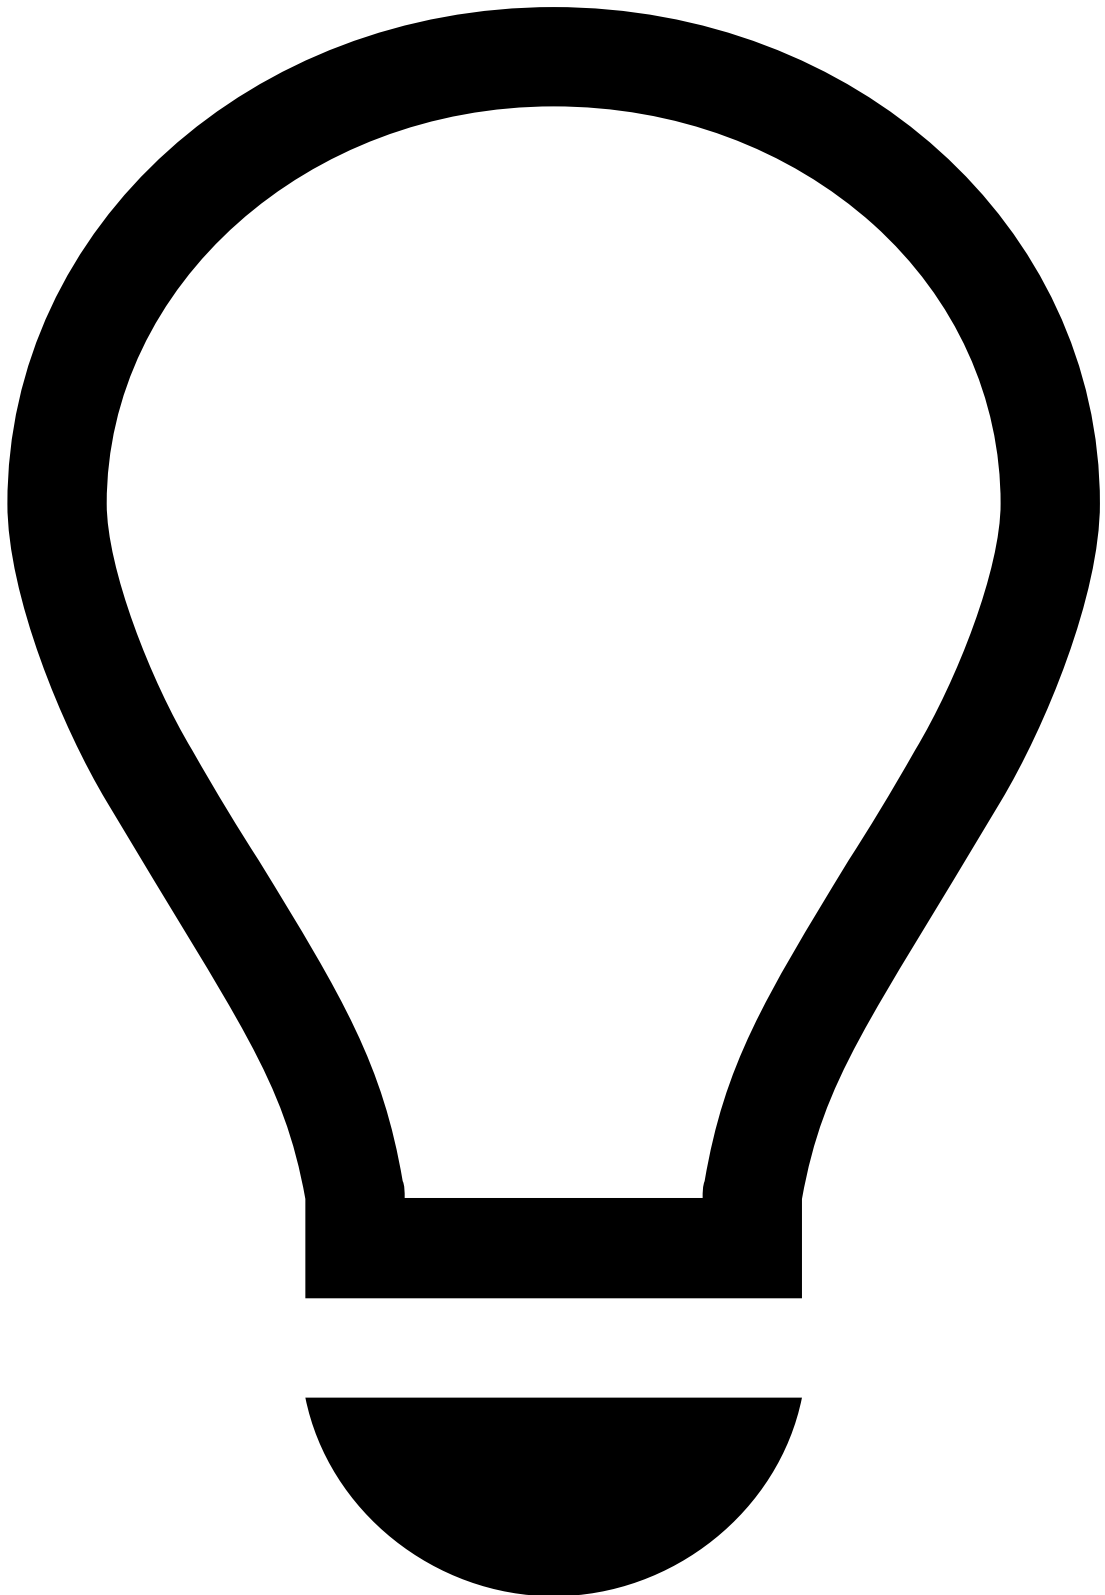

tip

Add items to the **Value** field by selecting the Space or Enter key.

The rule will then find a match between the selected field and any of the items added to the condition.

Schema comparison

These operators are used to compare different fields. For example, you can check if a card's last 4 digits are equal to a card's bin.

This type includes the following operators: =, !=, > and <.

- = and != compare fields of the same type (i.e. numeric vs numeric, alphanumeric vs alphanumeric and alphabetic vs alphabetic).
- > and < compare numeric fields.

Strings check

These operators are used to search for a certain value in a specific event field. For example, you can check if a customer's phone number contains 1234.

This type includes the following operators: **Contains** and **DOES NOT Contain**.

Learn More

Learn more about:

- What [Self-Service Rules](#) are and how they work.
- How to [manage Self-Service Rules](#) - create, view, edit, delete, and use the audit capabilities to have a clear understanding of all changes made.
- How to [test Self-Service Rules](#) so that you make the most out of them.