

-



- [Sign in](#)
- [Sign in with SSO](#)
- Sign in via IdP-initiated

On this page


Sign in via IdP-initiated

IdP-initiated is a scenario of Single Sign-On (SSO) that is supported by Case Manager. In this case, the user signs in to the Identity Provider (IdP) domain and then has access to the applications configured in the IdP.

How To

For this example, a Case Manager instance has been configured in the IdP as a Service Provider (SP) and acts as a proxy of a Pulse instance. Check [Configuring AD FS](#) in the Pulse documentation to learn how to add Case Manager as an SP.

- A Demo environment configured in the IdP as CaseManager
- A Demo environment configured in the IdP as PULSE DEMO.

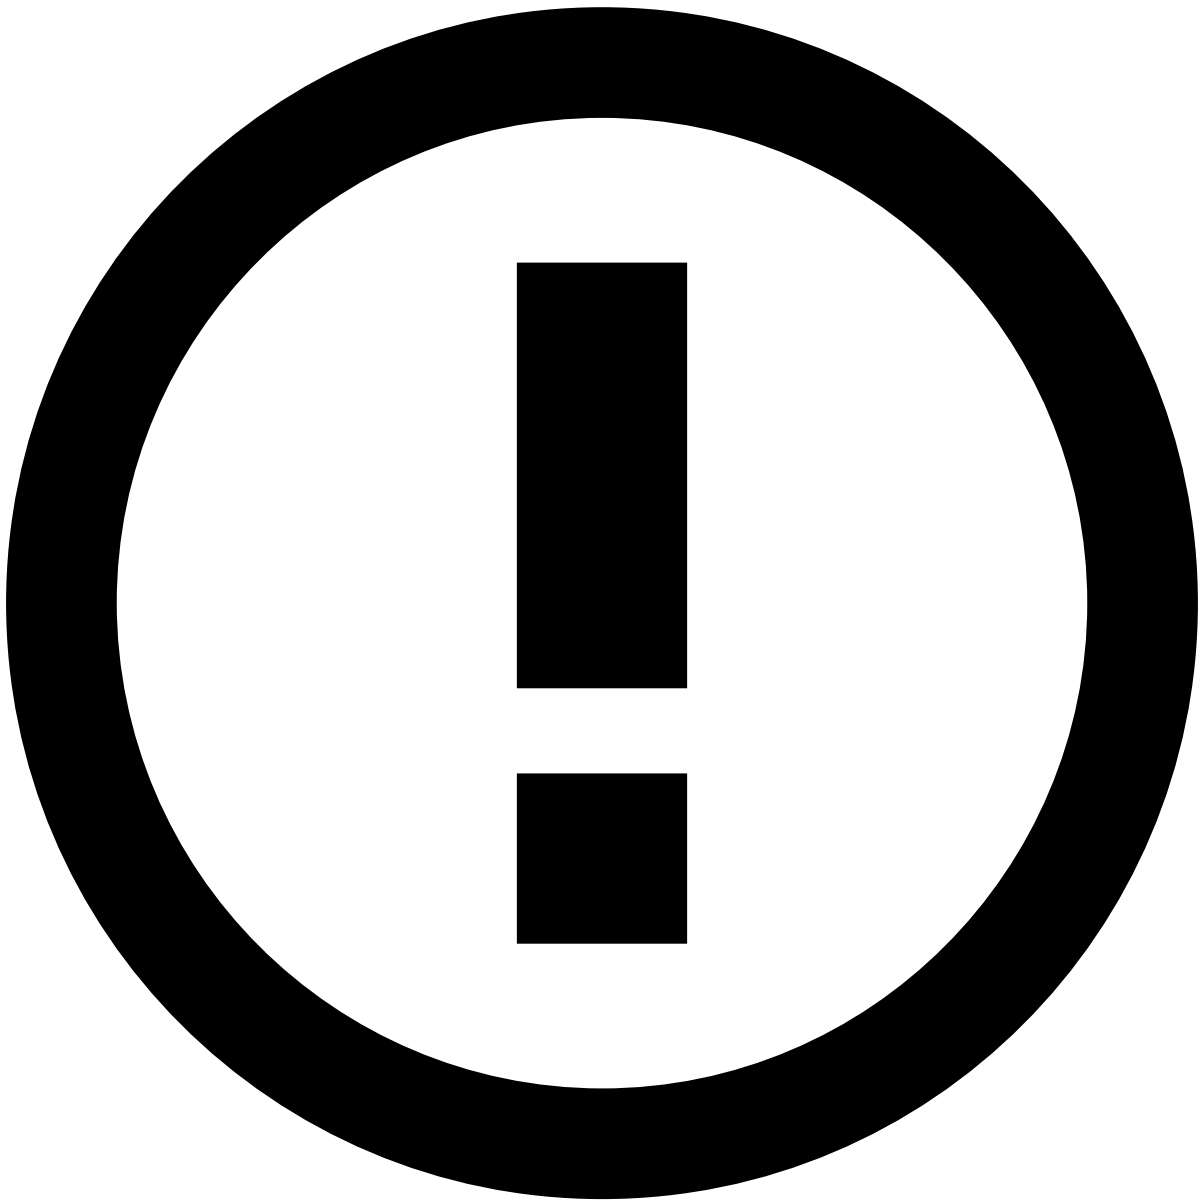


SP applications

Note that the Case Manager and the Pulse instances are used here as an example. In a production system the IdP could be configured with any application used by the client.

To use the example of sign into Case Manager via IdP-initiated execute the following actions (assuming that you are not already signed in to the IdP):

1. Access the IdP webpage configured for user authentication.
1. Choose the option *Sign in to this site* and select **Continue to Sign In**. The following sign in form is provided:
 1. Enter your credentials and select **Sign In**. This user credentials should have been already [configured in the IdP](#).
 2. Choose the Case Manager instance (e.g. CaseManager) that you would like to access and use the **Go** button to access this application.

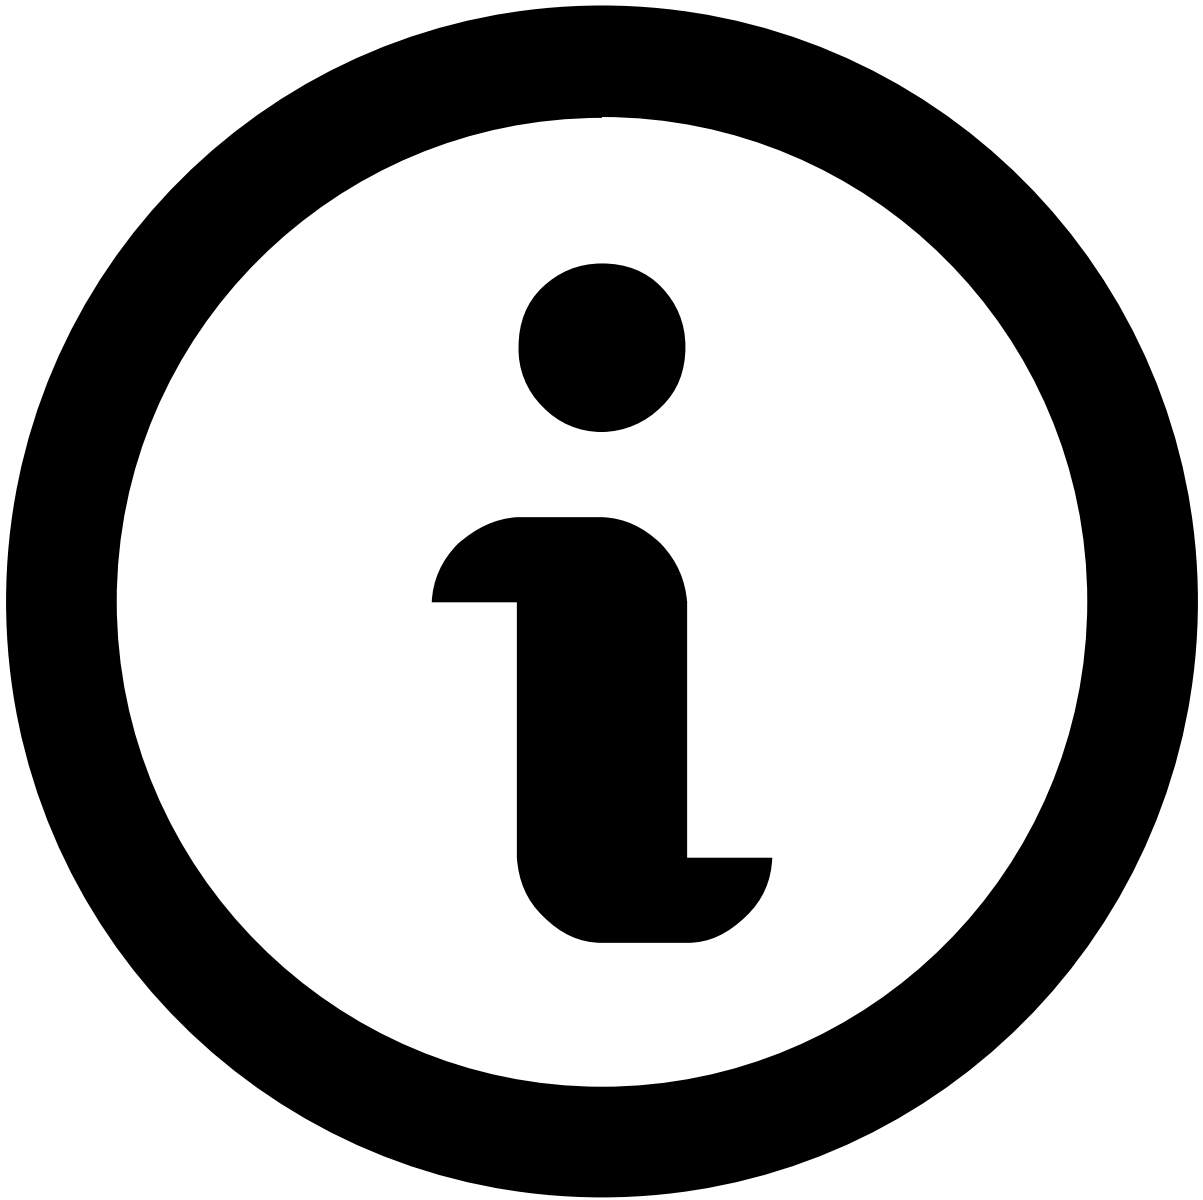

note

If your credentials are not yet associated to a Pulse User in the Pulse instance, a new user is created on-the-fly by [user provisioning](#) at the time that you sign into the Case Manager instance.

Next Steps

Learn more about the login scenario in which a user access a Pulse instance directly:

- [Signing in via SP-initiated](#)

Check Pulse Documentation to learn how to configure SPs and users in the IdP:

- [Add a Relying Party Trust](#)
- [Add new users](#)