

-




- [Sign in](#)
- [Sign in with SSO](#)
- Sign in via SP-initiated

On this page

Sign in via SP-initiated

SP-initiated is a use case of Single Sign-On (**SSO**) that is supported by Case Manager. A typical scenario of SP-initiated is when the user receives a URL by e-mail or the user wants to access a Feedzai product using a bookmark. E.g.:


```
http://<BASE_CASE_MANAGER_ADDRESS>/alert
```

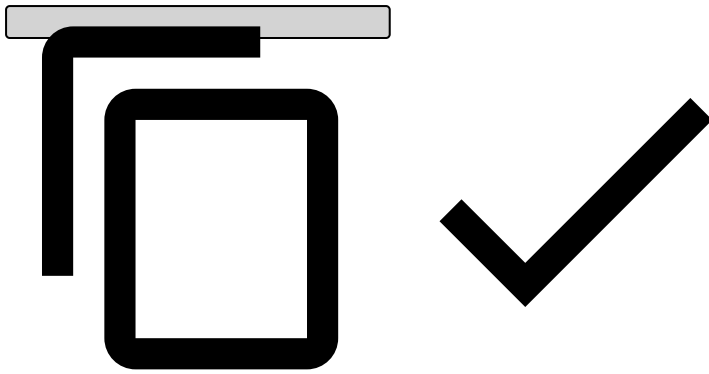

How To

For this example, a Case Manager instance has been configured in the IdP as a Service Provider (SP) and acts as proxy of a Pulse instance. Check [Configuring AD FS](#) in the Pulse documentation to learn how to add Case Manager as an SP.

- A Demo environment configured in the IdP as CaseManager
- A Demo environment configured in the IdP as PULSE DEMO.

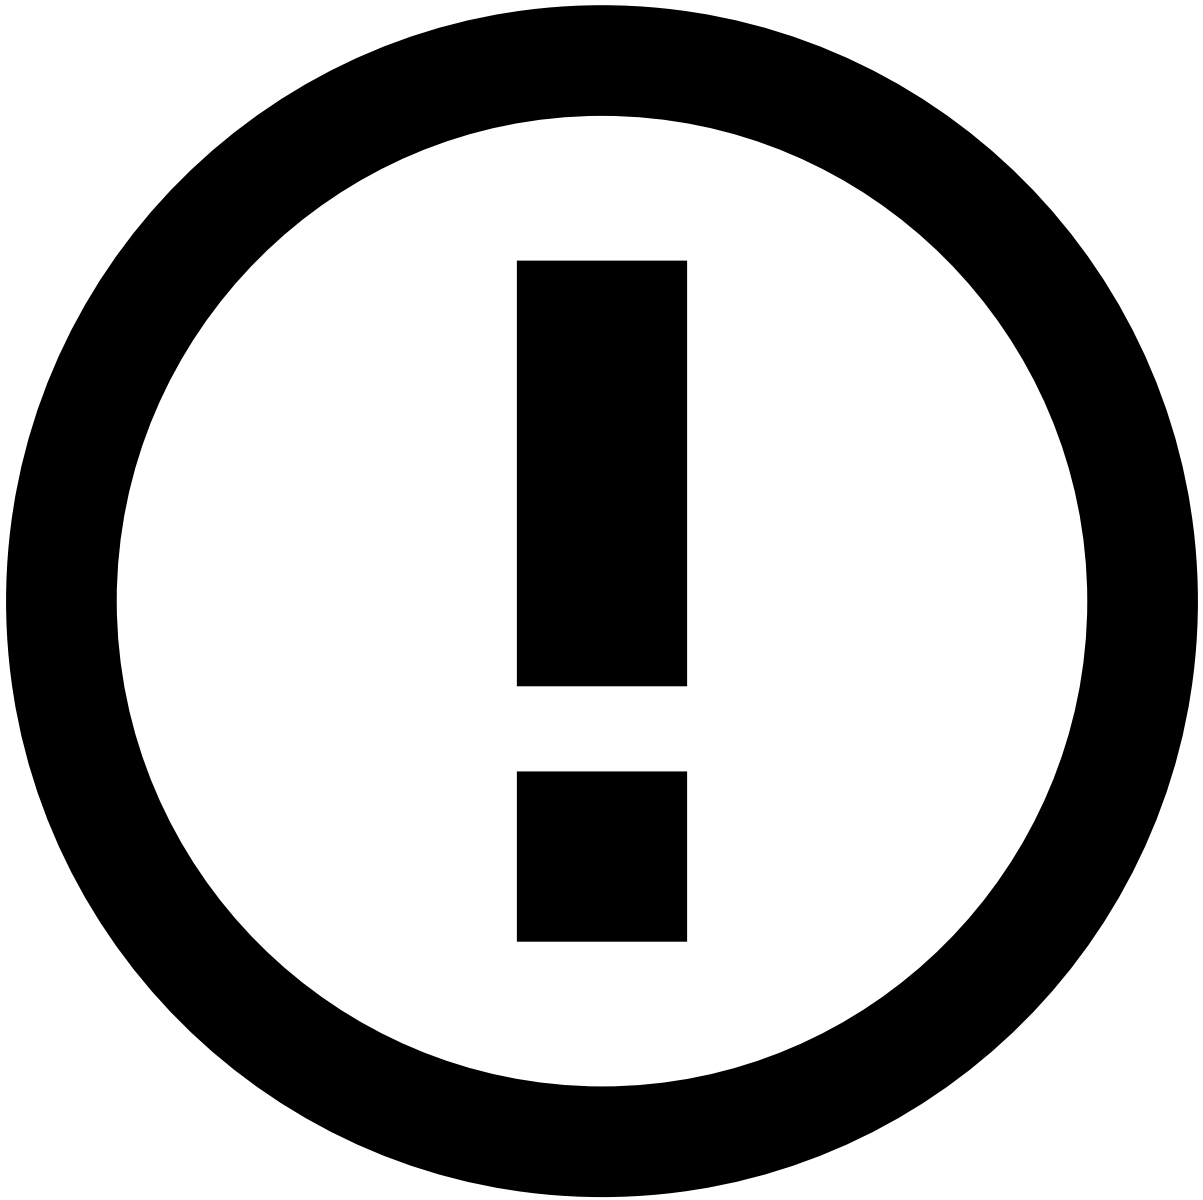

SP applications

Note that the Case Manager and the Pulse instances are used here as an example. In a production system, the IdP could be configured with any application used by the client.

To use the example of signing in to Case Manager via SP-initiated, perform the following steps (assuming that you are not already signed in to the IdP):

1. Access one of the URLs that have been configured as SP in the IdP. Note that you are redirected to the IdP URL to enter your credentials.
1. Enter your SSO credentials to sign in. These credentials should have been already [configured in the IdP](#). As a result, you are redirected to the Case Manager URL entered initially, *i.e.* to the internal path corresponding to the URL that you were trying to access on Step 1. Note that, if your credentials are not yet associated to a Pulse User in the Pulse instance, a new user is created on-the-fly by [user provisioning](#) when you sign in to the Case Manager instance.

Learn more

Learn more about [signing in via IdP-initiated](#).

In addition, check Pulse Documentation to learn how to configure SPs and users in the IdP:

- [Add a Relying Party Trust](#)
- [Add new users](#)