


.

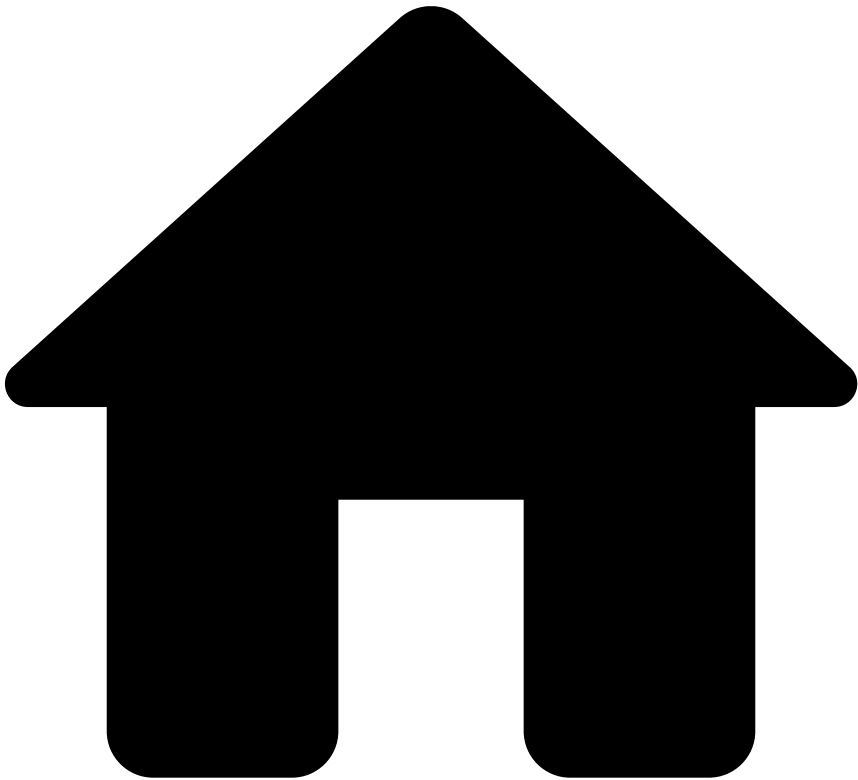

- Project Organization
- [Monitoring](#)
- [Pulse Probes](#)
- PKernel Probes

On this page

PKernel Probes

Was this page helpful?

PKernel probes, like the Pulse ones, provide a means to expose PKernel internal instrumentation data, allowing it to be stored in a central location for subsequent analysis.

Existing Probes

The following probes are built-in in the PKernel 2.0 (with RocksDB):

Description	Probe Name	Schema	Notes
-------------	------------	--------	-------

The time that an Event took to be processed inside of PKernel.	pkernel_post_event	timestamp : Long	Current timestamp in milliseconds.
		latency_ns : Long	Latency measured in nanoseconds.
The time that an Event took to be processed inside of PKernel after acquiring the lock. This allows to understand the true time spent inside PKernel, ignoring possible queue effects of the lock. (Available from PKernel 2.1.0+)	pkernel_post_event_inside_lock	timestamp : Long	Current timestamp in milliseconds.
		latency_ns : Long	Latency measured in nanoseconds.
The time that an Array of Events took to be processed inside of PKernel.	pkernel_post_events	timestamp : Long	Current timestamp in milliseconds.
		latency_ns : Long	Latency measured in nanoseconds.