


•

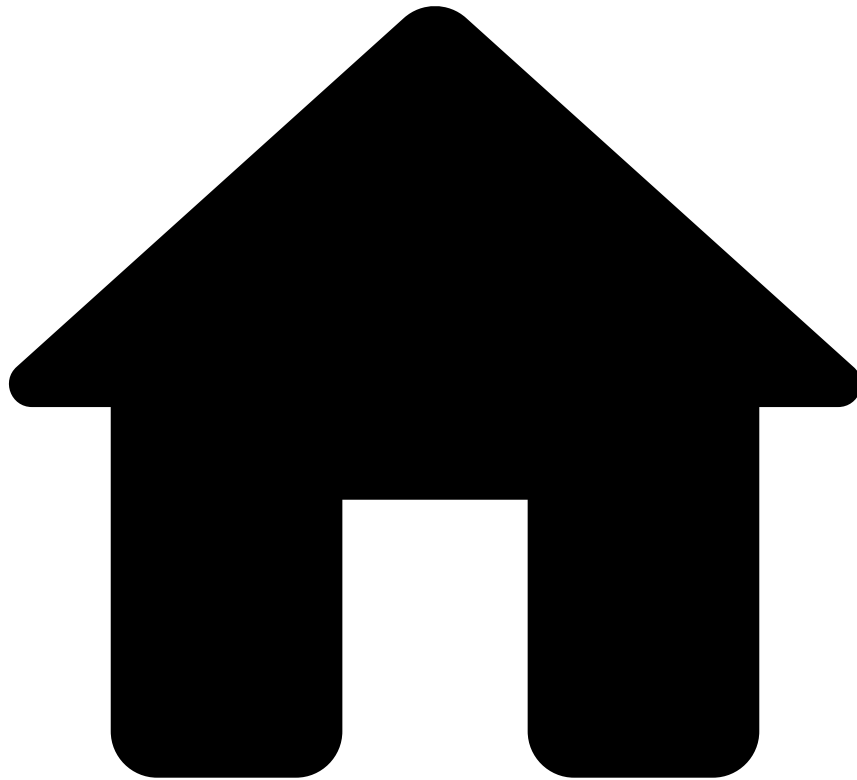

- [Deploying a project into Production](#)
- [Designing a workflow](#)
- Adding input adapters

On this page

Adding input adapters

Was this page helpful? 

Why

Input adapters are the [Workflow](#) element that allow your application to know how to consume data from an external source.

Your **Workflow** can consume data from different sources, such as CSV files, REST APIs, sockets reading ISO8583-formatted messages, etc. Thus, for each data input in your project, your **Workflow** needs a different **Input adapter**.

Adding **Input adapters** is the first step in designing your **Workflow**.

How to

To add and configure an Input adapter to your [Workflow](#), execute the following actions:

1. In the **Workflows** tab, select an existing **Workflow**.
2. Drag a new **Input Adapter Service** to the **Diagram** canvas.
3.  **Edit** the **Input Adapter Service**.
4. In the **Main** tab, select which [Custom Service](#) implements the functionality for your **Input Adapter**. Pulse includes an embedded **Synthetic Generator** that acts as a test input Custom Service, and periodically injects dummy data into your **Workflow**, according to its **Schema**.
5. In the **Schemas** tab, confirm that the **Service Output** is consistent with the data you expect for your project.



Extra fields

Note that the **Service Output** contains more fields than the **Schema** you specified for the **Workflow**. Pulse automatically adds a *timestamp* and *UUID* fields to the event schema.

Additionally, for each [configured Outcome](#) Pulse adds the boolean `<outcome_name>` and `_<outcome_name>score` fields.

6. In the **Properties** tab, set the values for each property to define the service configuration in your **Workflow**. Properties and default values are defined at the **Custom Service** that implements your **Input Adapter**.

Next Steps

Proceed with the designing of your Workflow by adding, configuring and connecting other services. Check the following pages:

- [Adding plans](#)
- [Adding models](#)
- [Adding rules](#)
- [Adding custom services](#)