


•

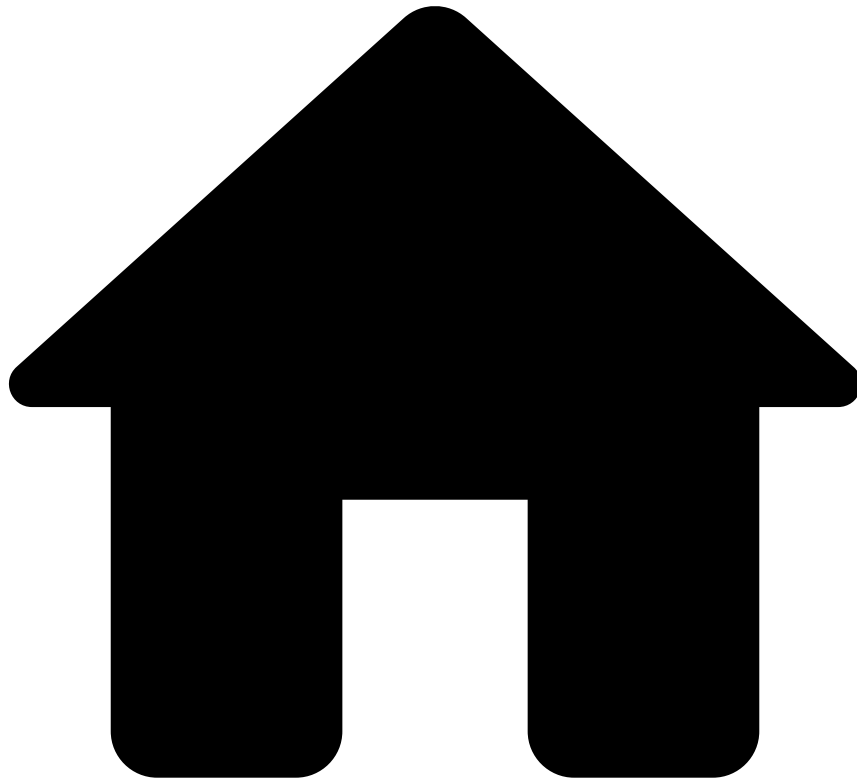

- [Rule Guide](#)
- [Creating Features](#)
- [Using PQL in Features](#)
- Conditional Expressions in PQL


Conditional Expressions in PQL

Was this page helpful? 

Conditional expressions of PQL return a value based on a condition.

Syntax:

```
if <condition> then <then-case-expression> else <else-case-expression>
```

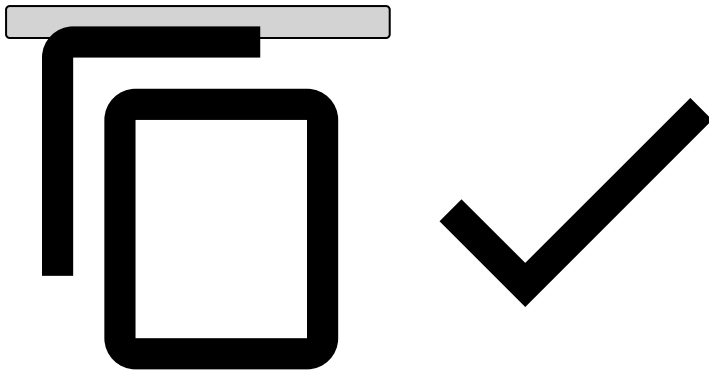

Where:

- `<condition>` is a boolean expression.
- `<then-case-expression>` and `<else-case-expression>` are obligatory values.

If the condition is true, the conditional expression returns the value of the then-case-expression, otherwise the value of the else-case-expression.

Example:

```
if( POSEntryMode == 'Swiped' or POSEntryMode == 'Keyed' or POSEntryMode == 'Chip' )  
  then 'Card Present'  
  else POSEntryMode
```

