


.

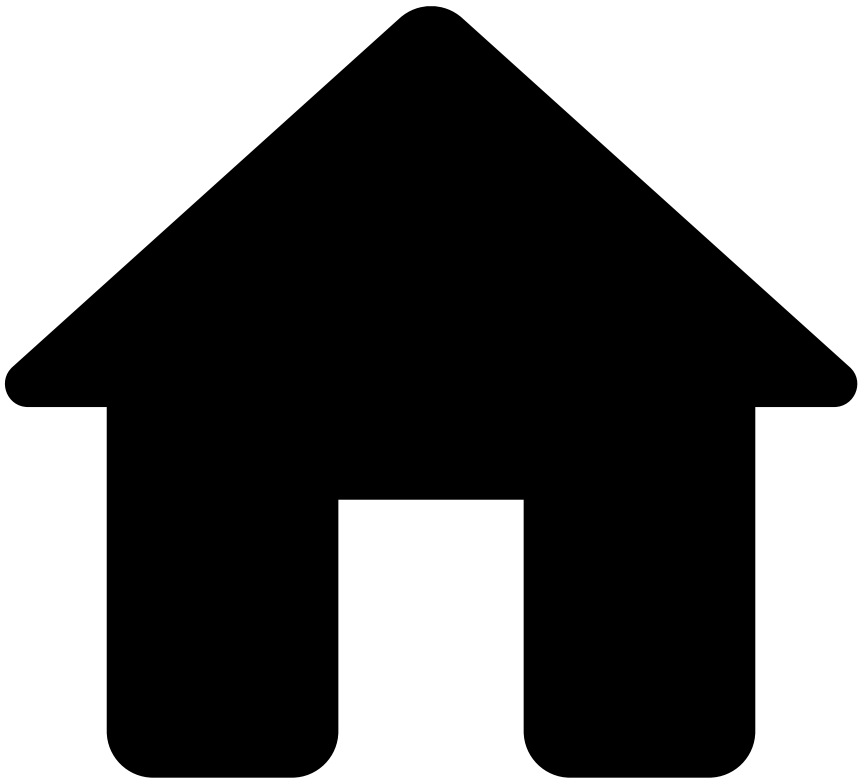

- [Rule Guide](#)
- [Creating Rules](#)
- Data Types in Rules

On this page

Was this page helpful? 

Data Types in Rules

RDL uses its own data types. When using a field or a list, the values get automatically converted to these data types. This topic describes the data types that RDL uses.

Primitive data types

The following table shows the **primitive data types** of RDL. These data types are equivalent to the Java primitive data types. To see the exact definition or range for each, check the [Java documentation](#).


Data type	Examples
int	

Data type	Examples
	-289 0 42
long	123456789 1l -2L
float	0.99 -1.23e-100f 3.14F
double	1234567.89012 1.23456e300d 1.23456e-300d 1e1D
bool	true false
string	"John Doe" 'John Doe'

Collections


RDL uses the following collections: lists, sets, maps, and tuples. They are the equivalent of the [complex data types](#) that you can use in the schema of a data source.

In RDL, the collection called map is the equivalent of a [list](#) created under **Lists** . Hence all collection operators can be used on them.

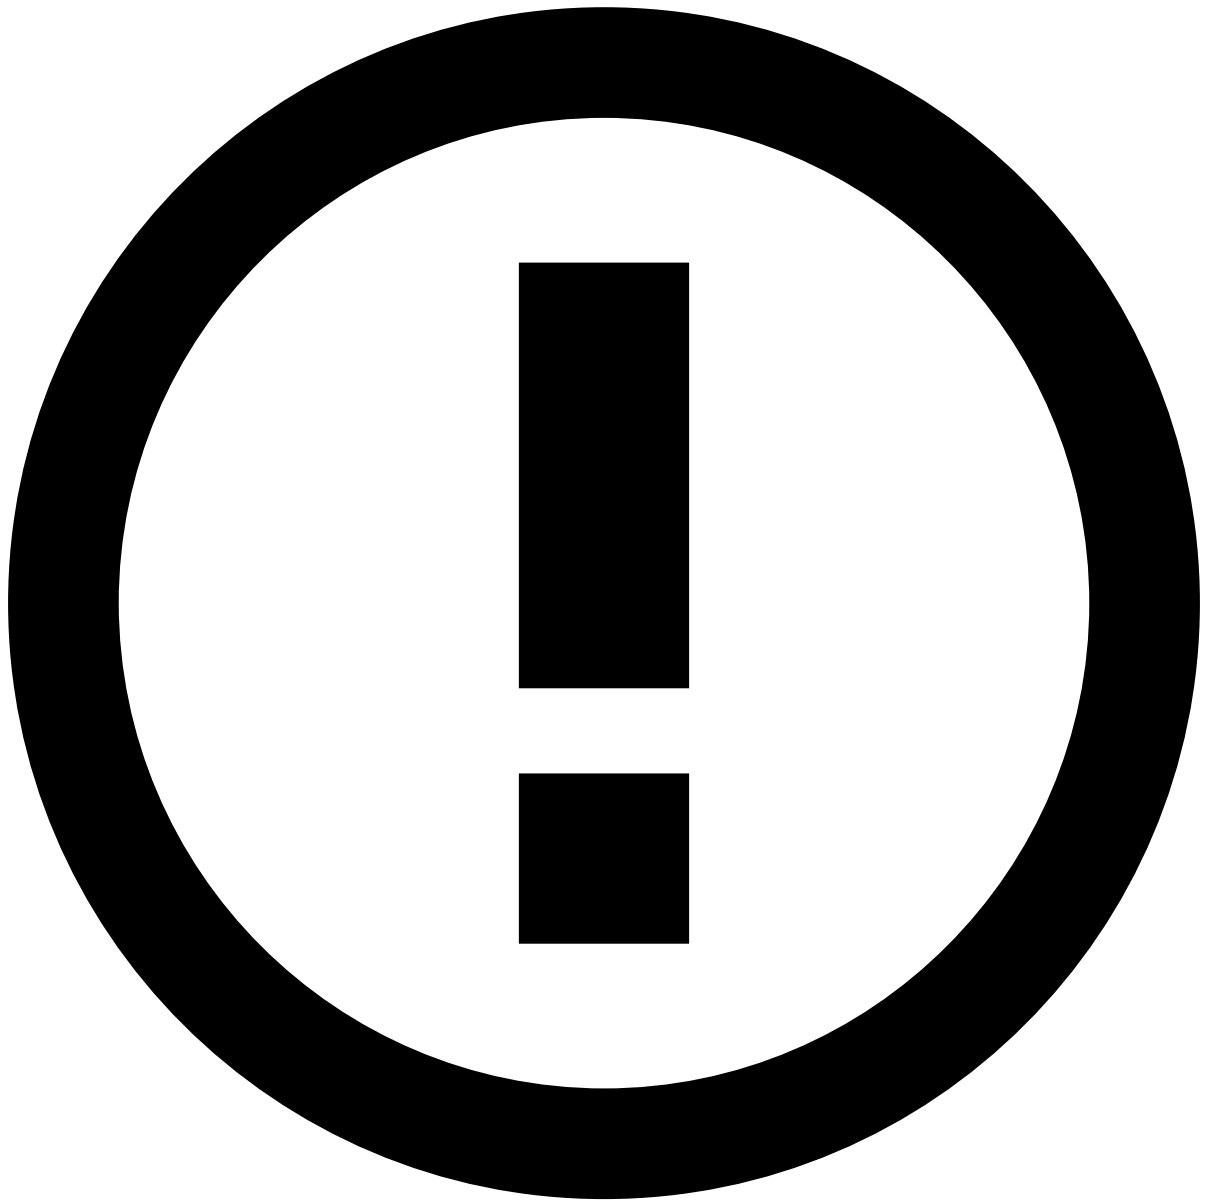

Best practice

Although it is possible to define collections directly in the rule using RDL, **the recommended method is to create a [list](#) outside of the rule, under Lists** . This way you can maintain the rules more easily, since a change in the list items does not imply the change and deployment of the whole rule.

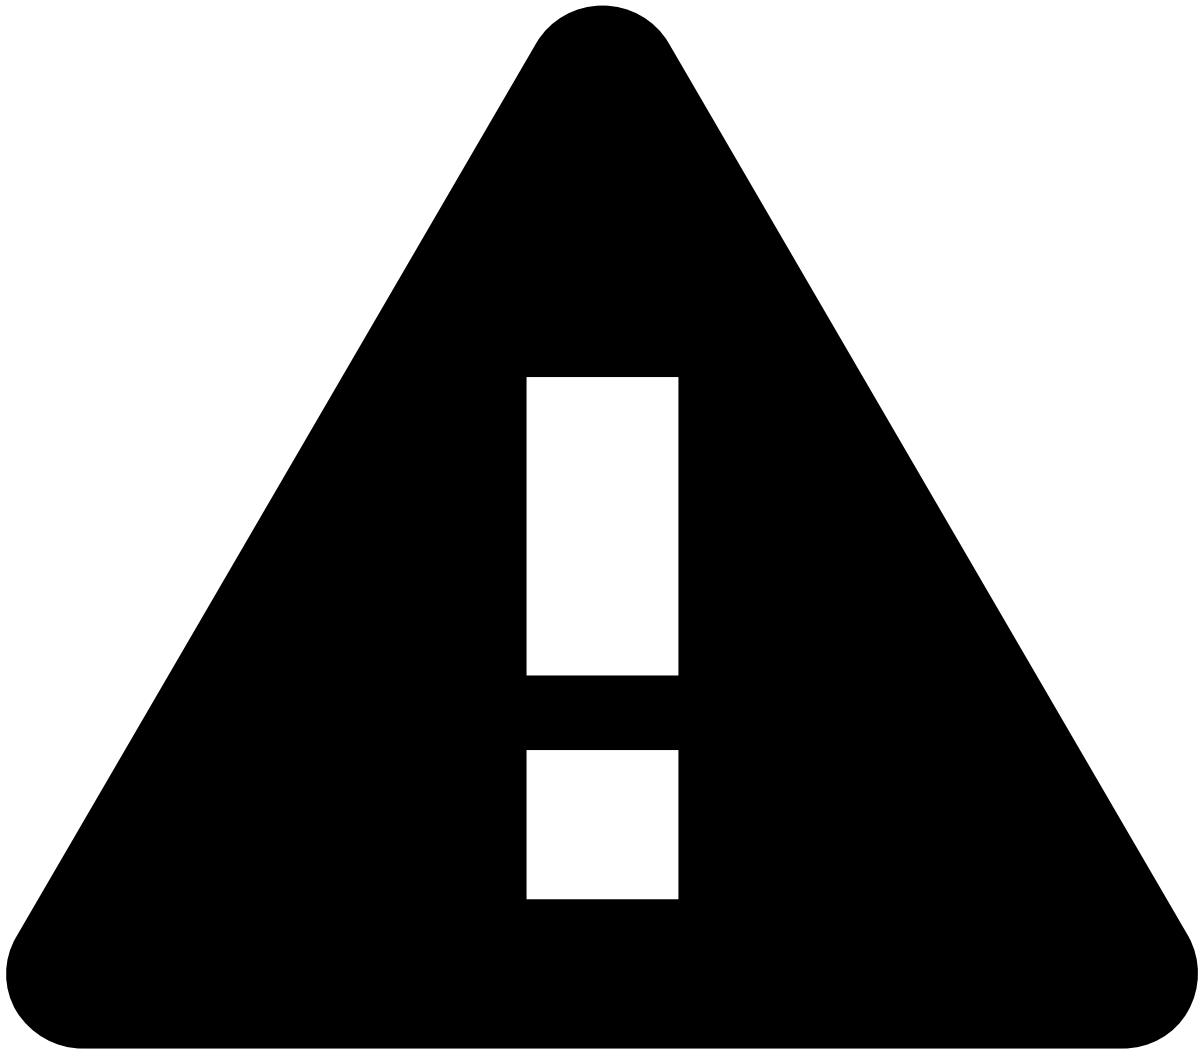

Explicitly iterating over lists is not recommended

It is not recommended to iterate explicitly over Pulse lists (e.g., using `filter`, `all`, etc), as this is highly inefficient. Pulse lists are optimized for `contains`/`lookup` operations.