


•

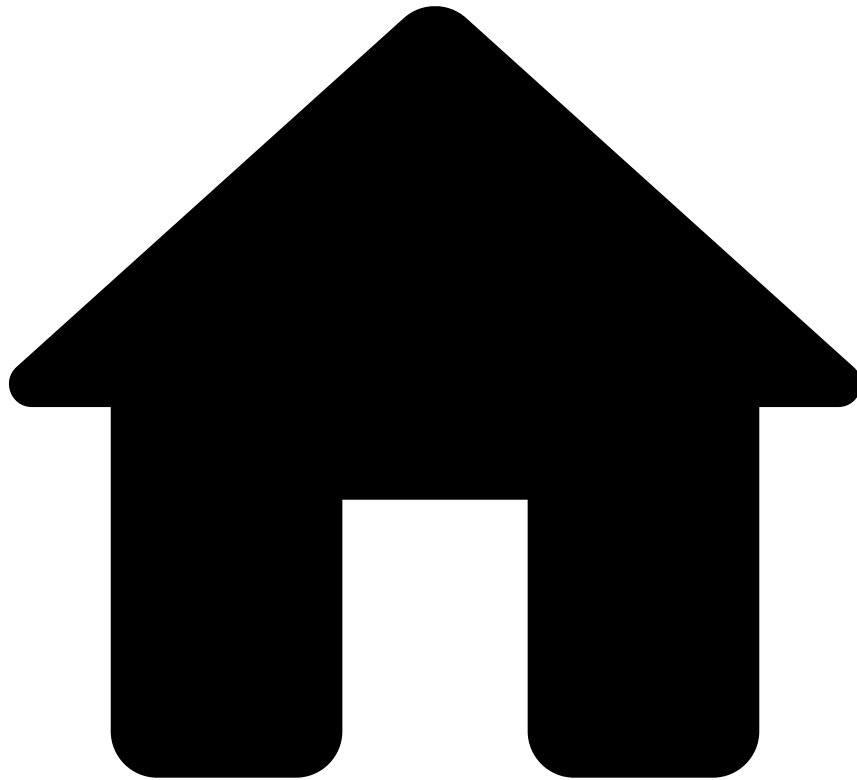

- [Operational Work](#)
- [Integration Engineer](#)
- [Integration Guide](#)
- [Rule Testing](#)
- Test Scenario Example with Postman Collection

On this page

Test Scenario Example with Postman Collection

This section contains an example on how to design test cases for rules. Different data and details are evaluated in order to create a scenario that will lead to the rule being triggered upon the specified conditions.

The test specification example was designed to test the rule `Failed-3DS-Count-Rate-FR1`. This section contains the test description and the test data to be injected into the system for the given merchant monitoring rule. Only the set of fields that contribute to the metric calculation and rule conditions evaluation are indicated. For other fields, default values can be used.

Rule details

Rule name

Failed-3DS-Count-Rate-FR1 : Failed 3ds count rate, over the last month, is equal to or above a set threshold.

Rule properties

Property	Description	Value
Rule Alerting Frequency	The frequency at which the rule will be evaluated and alerts generated for this rule	Everyday
Historical Period	Historical period that applies to the Rule being tested	N/A
Lookback Period	Look-back period that applied to the Rule being tested	1 month

Client risk rating parameters

Parameter	Default Value
count_3ds_limit_1m	0.6
min_avg_amount	1
min_trx_count	1

Test specification example for Failed-3DS-Count-Rate-FR1

Test scenario

The fraud rule Failed-3DS-Count-Rate-FR1 verifies that the failed 3ds payments over the total number of payments, over the last month, is equal to or above a set threshold.

To trigger this rule, the following requests are needed with the same merchant_id :

- 1 payment request
- 1 info request with payment_3ds_status_code : F
- 1 merchant monitoring request

Payment workflow data

Timestamp	Merchant Id	Request
T+0	merchant_id_fr1	payment
T+1	merchant_id_fr1	info
T+2	dummy_event*	payment
T+3	dummy_event*	merchant monitoring
T+4	merchant_id_fr1	merchant monitoring

Dummy events are used to move workflow clocks forward.

Postman Collection

Feedzai offers an out-of-the-box postman collection that enables you to test the Failed-3DS-Count-Rate-FR1 rule.

For more details on the rules scope, check the official documentation provided by Feedzai in [Rules Projects](#).

The postman collection is available for download [here](#).

General description^â

Postman Execution Order	Description
0 - Setup	Load postman collection
1 - Inject payments	Run requests 1 and 2
2 - Move clocks	Run requests 3 and 4 with dummy data
3 - Run SMJs	Triggers the Scheduled Metric Job that calculates the metrics using the injected transactions and customers/accounts
4 - Run merchant monitoring	Run request 5 with the merchant monitoring request
5 - Verify data in CM	Run request 5 with the merchant monitoring request

Detailed description^â

1. Setup

- Load both the collection (`RMPSP_MM_Test_Guide.postman_collection.json`) and the environment (`Local_RMPSP.postman_environment.json`) in your Postman instance.

2. Inject payments

- Inject payment transactions (requests 1 and 2).

3. Move workflow clocks

- Inject dummy payment and merchant monitoring transactions. These transactions are used to advance the workflow clock to the desired timestamp to be used by the Scheduled Metric Job to calculate the metrics' windows from (requests 3 and 4).

4. Run SMJs

- Log into Pulse.
- Go to `/pulseviews/management/#apps/mm/jobs`.
- Run both Scheduled Metrics Jobs from the Registered Jobs section.
- Wait for the Scheduled Metrics Jobs to finish.

5. Inject merchant monitoring

- Inject merchant monitoring transactions (request 5).

6. Verify rules triggered in Case Manager

- Open the merchant monitoring event in Case Manager, where the `Failed-3DS-Count-Rate-FR1` rule will appear in the Rules Triggered widget.