

•



- [API Resources](#)
- [Additional Resources](#)
- Responses

On this page

Responses

Successful response[ⓘ]

Successful calls to Feedzai's API result in a response with HTTP 200 code. Please check each endpoint's documentation to see the structure of a successful response.

Warning response[ⓘ]

A warning response is a subtype of a successful response which is sent with the HTTP 200 code. The transaction is also processed; however, the response returns the `status` field "warning" and the `warnings` field explaining the reasons for this outcome.

Error response🔗📄

When a call to Feedzai's API results in an error, the response object returned always has the same fields. In particular, the `status` field is shared with the successful response objects of all endpoints. The **Error Response** object is defined as follows:

Name	Field Type	Description
<code>code</code>	String	An indicative code for the error. See possible values below.
<code>errors</code>	Array of strings	A list of free text explanations for the error.
<code>status</code>	String	Always with value <code>error</code> .

Generic Error codes - Possible Values🔗📄

Error code	Description	HTTP Code
<code>authenticationError</code>	The request could not be authenticated.	401
<code>authorizationError</code>	The authenticated user does not have permission to access the endpoint.	403
<code>parseError</code>	The request could not be parsed.	400
<code>invalidParameterError</code>	The URL parameter provided is invalid.	400
<code>invalidTimestampError</code>	The timestamp provided in the request is invalid.	400
<code>nonexistentEndpoint</code>	The endpoint being called does not exist.	404
<code>unsupportedMethod</code>	The HTTP method to call this endpoint is not supported.	405
<code>tooManyRequests</code>	The allowed request rate was exceeded.	429
<code>internalError</code>	Feedzai's system produced an internal error.	500
<code>timeoutError</code>	Feedzai's system failed to produce a timely response.	504

Please check each [endpoint's documentation](#) for specific error codes.

Responses for timestamps out of range🔗📄


This subsection describes responses for requests with timestamps that are out of the valid range.

Endpoint	Timestamp	Response HTTP code	Error or Warning	Is transaction processed?
Authorization	<code>event_occurred_at</code> in the past	400	Error	No
Authorization	<code>event_occurred_at</code> in the future	400	Error	No
Info, Clearing, Feedback	<code>event_occurred_at</code> in the past	200	Warning	Yes
Info, Clearing, Feedback	<code>event_occurred_at</code> in the future	400	Error	No

Error Response Example:

```
{
  "status": "error",
  "code": "invalidTimestampError",
  "errors": [
    "Event has timestamp in the future: <EVENT_OCCURRED_AT> | Now is: '2018-09-04T16:41:30.774Z'"
  ]
}
```

```
]
}
```

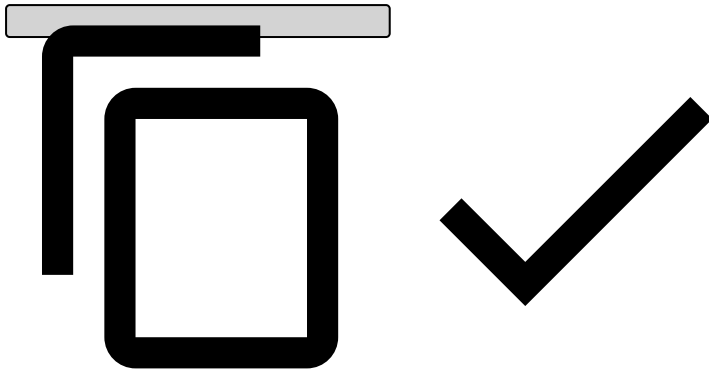

Warning response example:

```
{
  "lifecycle_id": <LIFECYCLE_ID>,
  "event_external_id": <EVENT_EXTERNAL_ID>,
  "warnings": [
    "Event has timestamp in the past: <EVENT_OCCURRED_AT> | Now is:
'2018-09-04T16:40:40.522Z'"
  ],
  "status": "warning"
}
```

