

On this page

Inbound Transfer Initiation Response Scenarios

Was this page helpful? 

This section presents several scenarios that might occur in the Inbound Transfer Initiation response, depending on the rules that are triggered in the Pulse workflow. Check the Inbound Payments' [Inbound Transfer Initiation Endpoint](#) for more information about detailed request and response examples.

When no rules are triggered, the following fields and default values are shown in the Inbound Payments' Inbound Transfer Initiation response:


- `"alert": false` This field is changed to 'true' when any rule with the action 'alert' is triggered. See examples of possible scenarios below.
- `"action_codes": []` This field is populated with the actions of the first triggered rule, other than the 'alert' action. Note that the 'alert' action is represented by the `alert` field.
- `"secondary_action_codes": []` This field is populated with all the non-'alert' actions of every triggered rule, except the first triggered rule.

When rules are triggered, they match the following scenarios:

Scenario 1

- **The first triggered rule:**
 - Action field - Alert
- **Excerpt from the Inbound Transfer Initiation response:**

```
{
  "alert": true,
  "action_codes" = [],
  "secondary_action_codes" = []
}
```

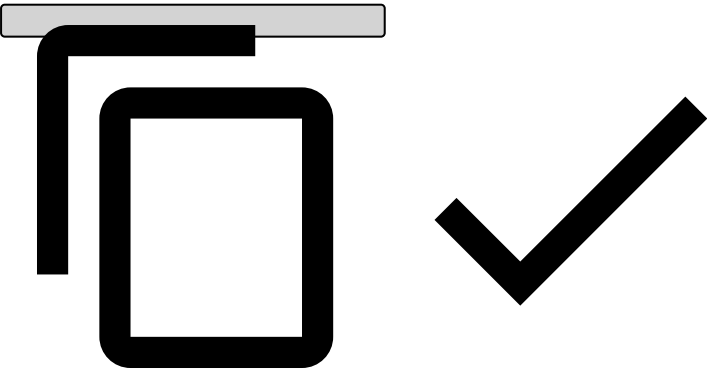


Scenario 2

- **The first triggered rule:**
 - Action field - Alert + Action 1 + Action 2 + Action 3
- **Excerpt from the Inbound Transfer Initiation response:**

```
{
  "alert": true,
```


```
"action_codes" = ["Action 1", "Action 2", "Action 3"],  
"secondary_action_codes" = []  
}
```

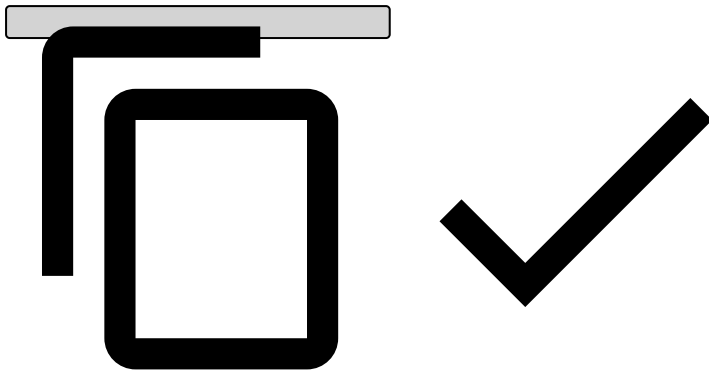

Scenario 3

- The first triggered rule:
 - Action field - Alert
- The second triggered rule:
 - Action field - Alert + Action 1 + Action 2 + Action 3
- Excerpt from the Inbound Transfer Initiation response:


```
{  
  "alert": true,  
  "action_codes" = [],  
  "secondary_action_codes" = ["Action 1", "Action 2", "Action 3"]  
}
```

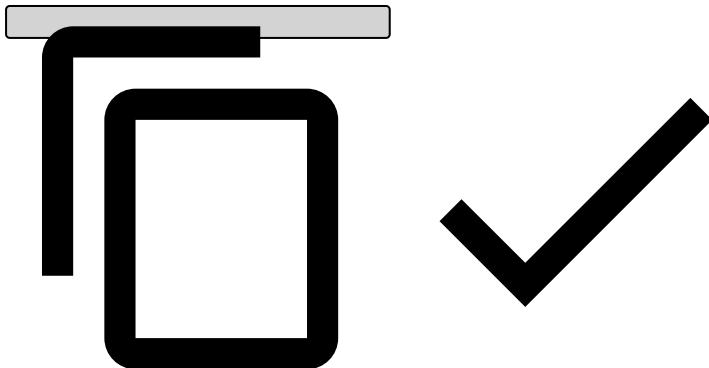

Scenario 4

- The first triggered rule:
 - Action field - Alert + Action 1 + Action 2 + Action 3
- The second triggered rule:
 - Action field - Alert + Action 1 + Action 2 + Action 3
- Excerpt from the Inbound Transfer Initiation response:


```
{  
  "alert": true,  
  "action_codes" = ["Action 1", "Action 2", "Action 3"],  
  "secondary_action_codes" = ["Action 1", "Action 2", "Action 3"]  
}
```

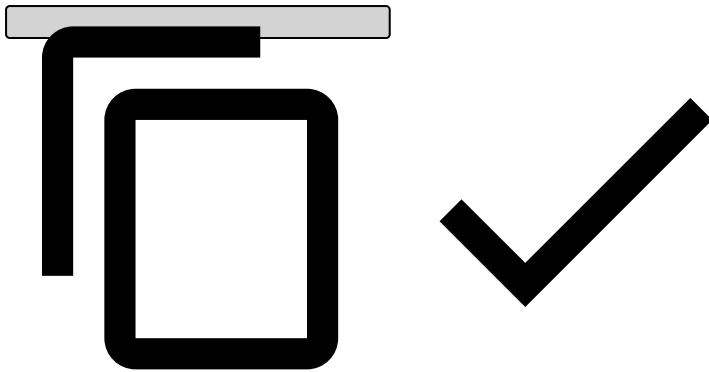

Scenario 5

- **The first triggered rule:**
 - Action field - Alert + Action 1 + Action 2 + Action 3
- **The second triggered rule:**
 - Action field - Alert + Action 1 + Action 2 + Action 3
- **The third triggered rule:**
 - Action field - Alert + Action 1 + Action 2 + Action 4
- **Excerpt from the Inbound Transfer Initiation response:**

```
{  
  "alert": true,  
  "action_codes" = ["Action 1", "Action 2", "Action 3"],  
  "secondary_action_codes" = ["Action 1", "Action 2", "Action 3", "Action 4"]  
}
```

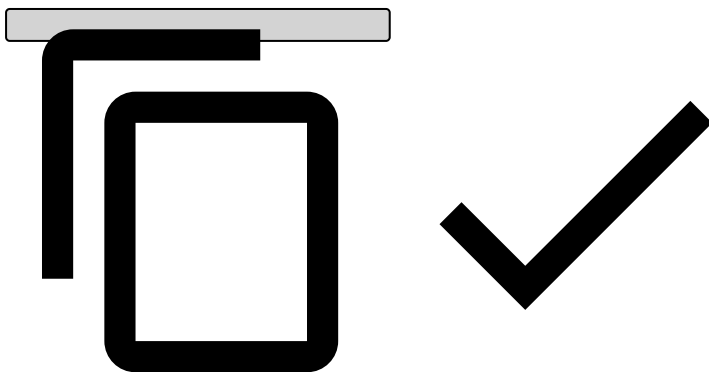

Scenario 6

- **The first triggered rule:**
 - This rule doesn't have actions.
- **The second triggered rule:**
 - Action field - Alert + Action 1 + Action 2 + Action 3
- **Excerpt from the Inbound Transfer Initiation response:**

```
{  
  "alert": true,  
  "action_codes" = [],  
  "secondary_action_codes" = ["Action 1", "Action 2", "Action 3"]  
}
```

