


•

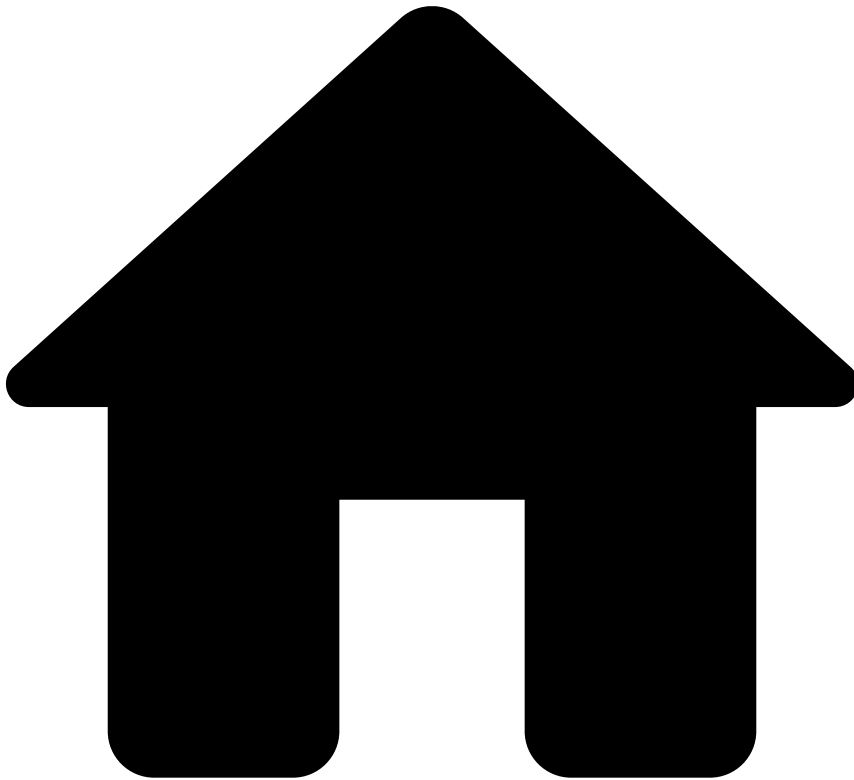

- [API Resources](#)
- [Additional Resources](#)
- Responses and Errors

On this page

Responses and Errors

Was this page helpful? 

Successful response

Successful calls to Feedzai's API result in a response with HTTP 200 code. Please check each endpoint's documentation to see the structure of a successful response.

Warning response

A warning response is a subtype of a successful response which is sent with the HTTP 200 code. The transaction is also processed; however, the response returns the `status` field "warning" and the `warnings` field explaining the reasons for this outcome.

Error response

When a call to Feedzai's API results in an error, the response object returned always has the same fields. In particular, the `status` field is shared with the successful response objects of all endpoints. The **Error Response** object is defined as follows:

Name	Field Type	Description
<code>code</code>	String	An indicative code for the error. See possible values below.
<code>errors</code>	Array of strings	A list of free text explanations for the error.
<code>status</code>	String	Always with value <code>error</code> .

Generic Error codes - Possible Values

Error code	Description	HTTP Code
<code>authenticationError</code>	The request could not be authenticated.	401
<code>authorizationError</code>	The authenticated user does not have permission to access the endpoint.	403
<code>parseError</code>	The request could not be parsed.	400
<code>invalidParameterError</code>	The URL parameter provided is invalid.	400
<code>invalidTimestampError</code>	The timestamp provided in the request is invalid.	400
<code>nonexistentEndpoint</code>	The endpoint being called does not exist.	404
<code>unsupportedMethod</code>	The HTTP method to call this endpoint is not supported.	405
<code>tooManyRequests</code>	The allowed request rate was exceeded.	429
<code>internalError</code>	Feedzai's system produced an internal error.	500
<code>timeoutError</code>	Feedzai's system failed to produce a timely response.	504

Please check each endpoint's documentation for specific error codes.


Responses for timestamps out of range

This subsection describes responses for requests with timestamps that are out of the valid range.

Endpoint	Timestamp	Response HTTP code	Error or Warning	Is transaction processed?
Authorization	<code>event_occurred_at</code> in the past	400	Error	No
Authorization	<code>event_occurred_at</code> in the future	400	Error	No
Info, Clearing, Feedback	<code>event_occurred_at</code> in the past	200	Warning	Yes
Info, Clearing, Feedback	<code>event_occurred_at</code> in the future	400	Error	No

Error Response Example:

```
{
  "status": "error",
  "code": "invalidTimestampError",
  "errors": [
    "Event has timestamp in the future: <EVENT_OCCURRED_AT> | Now is:
'2018-09-04T16:41:30.774Z'"
  ]
}
```

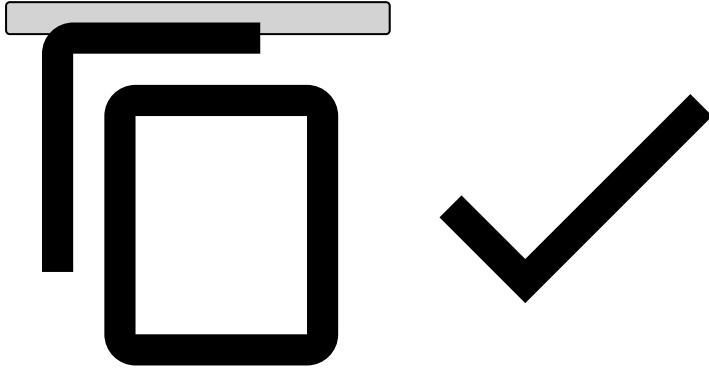

Warning response example:

```
{
  "lifecycle_id": <LIFECYCLE_ID>,
  "event_external_id": <EVENT_EXTERNAL_ID>,
  "warnings": [
    "Event has timestamp in the past: <EVENT_OCCURRED_AT> | Now is:
'2018-09-04T16:40:40.522Z'"
  ],
  "status": "warning"
}
```

