

•



- [About TFB](#)
- [Event Life Cycles](#)
- [Cards](#)
- Authorization Endpoint

On this page

## Authorization Endpoint

Was this page helpful? 

An authorization is often the initial message on your payment process chain, corresponding to x1xx or x2xx ISO 8583 messages. The request sent to the Authorization endpoint is processed by Feedzai's risk engine using a combination of machine learning models and rules. Feedzai produces a response that includes:

- **A score:** Represents the fraud probability.
- **A decision:** Represents the Feedzai recommendation to approve or decline a transaction.

Based on the response of this endpoint, you can decide on whether or not to accept the transaction. It also helps you to take further actions, such as contacting a client to confirm the authenticity of the transaction (check the [Out of Band Authorization](#) section to learn more about this scenario).

The following figure illustrates the transaction life cycle for an Authorization message:


The numbers in the figure are described below:

1. Cardholder makes a purchase or withdrawal.
2. Merchant or ATM receives cardholder information.
3. Authorization message (ISO 8583 or network proprietary message).
4. ISO 8583 authorization (1xx) or presentment (2xx) message request.
5. Internal validations (Client, Account, Card, etc).
6. Authorization request - ISO 8583 authorization (1xx) or presentment (2xx) message.



reference data enrichment

The event may become enriched with data fetched from the [Reference Data Storage](#) if any of the event's entities (e.g. Card, Customer, or Account) have a match in the Reference Data Storage.

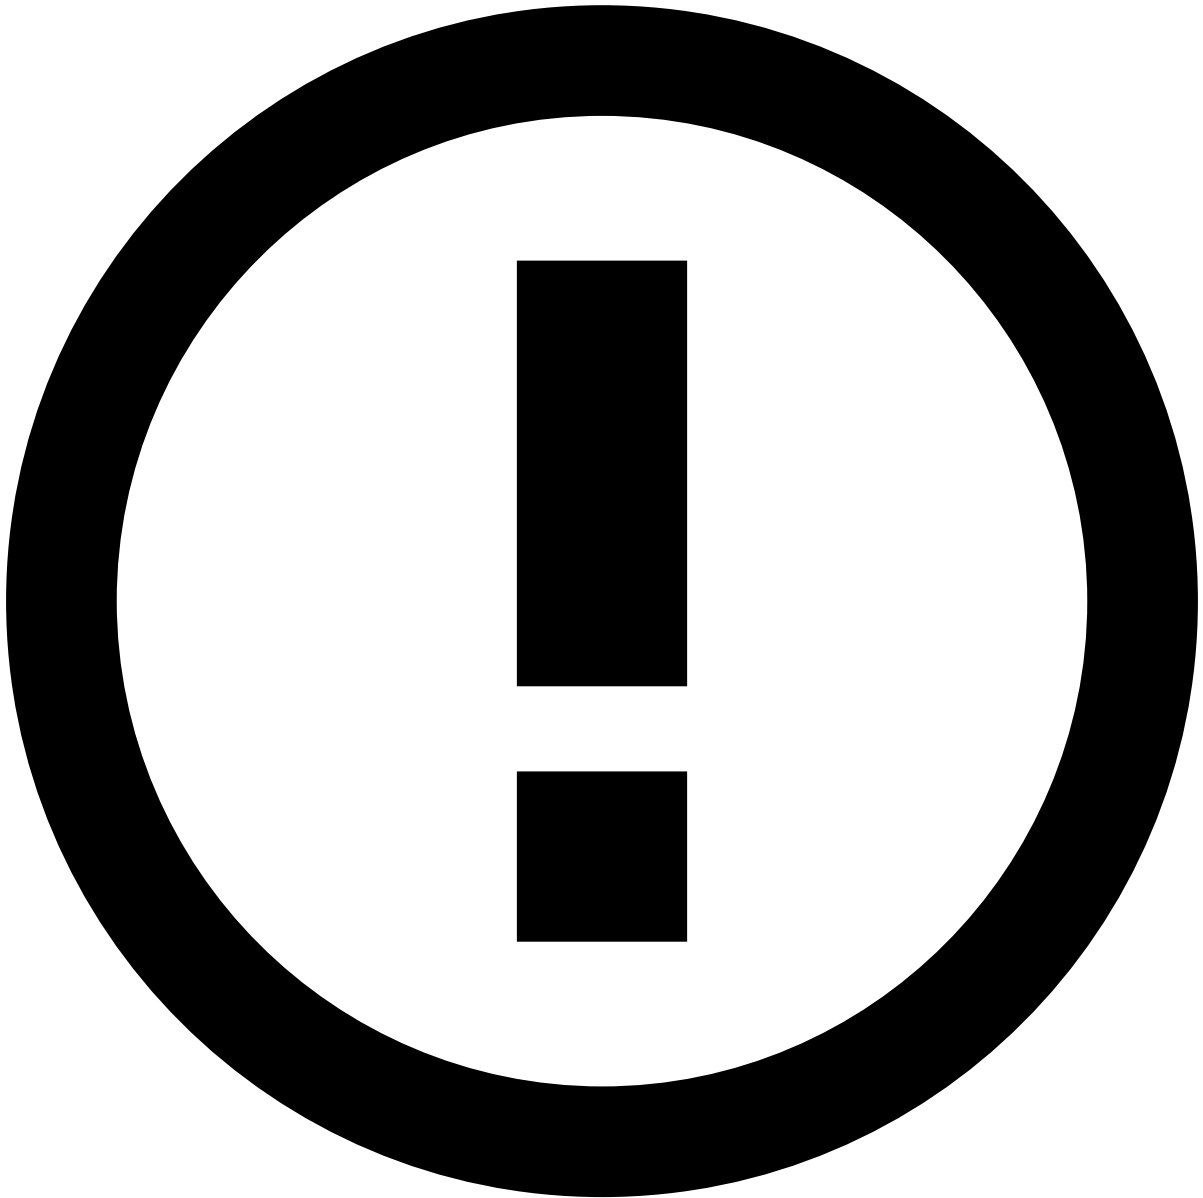

info

Note that any new data from card authorization events (e.g. new `card_category` ) will take precedence over what's in the Reference Data Storage. Read the [Reference Data Life Cycle](#) page to understand the logic behind reference data's entity-based enrichment.

1. Pulse scores and sets a decision recommendation: **decline** or **approve** transaction.
2. Case Manager is provided with the field values that are sent via the Authorization endpoint.
3. Authorization response: score, decision (**decline** or **approve**), actions and alert.
4. The issuer may honor or not the decision recommendation: **reject** or **accept** transaction (with a reason code).
5. ISO 8583 authorization (1xx) or presentment (2xx) message response.
6. Authorization message response (ISO 8583 or network proprietary message).
7. Payment is **rejected** or **accepted**.


### Recommendations on ATM withdrawals

To correctly map ATM withdrawals to card authorizations, and hence score ATM withdrawals, some fields need to be populated to identify ATM withdrawal events as follows:

```

{
  // Required fields
  "mti": "0110",
  "card_pan": "8955060600182663", // Which card was used
  "ttc": "001", // Type of transaction
  "currency_code": "EUR",
  "amount": 20,
  "cardholder_bill_amount": 20,
  "lifecycle_id": "1df7a7qg78vd7fs",
  "pos_card_read_method": "01",
  "event_occurred_at": 1684492270092,
  "card_bin": "123456",
  "account_iban": "482924bf58091603ed69c5bd1221ad67481bfca8",
  "customer_id": "87b2ee22cb0004722a7265fdbbf7be98c681a3bb",
}

```

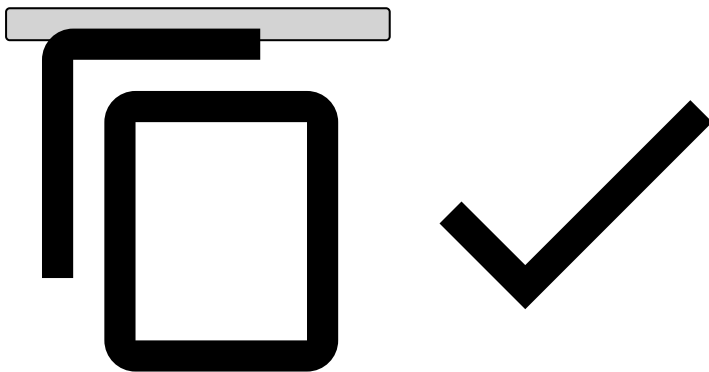

Read the [Authorization \[POST\]](#) documentation for more information on other fields you can use in the payload.

## Learn more

Learn more about the detailed life cycle of other endpoints:

- [Info](#)
- [Clearing](#)
- [Feedback](#)