


•

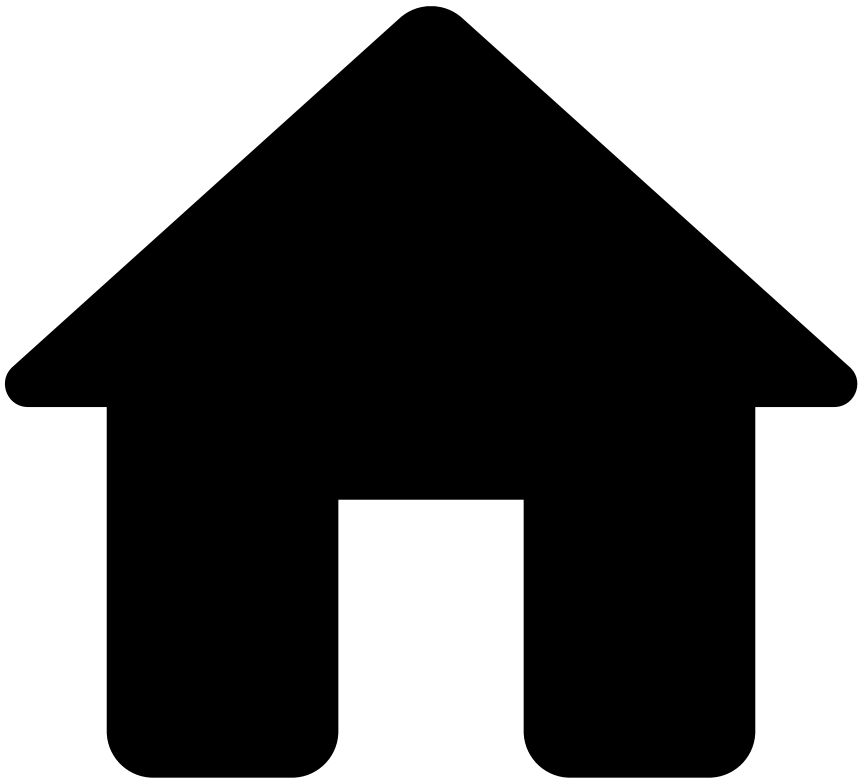

- [References](#)
- [Data Exporting Tool](#)
- Case Manager
- Case Manager Event - Base Schema

Case Manager Event - Base Schema

Was this page helpful? 

The **Case Manager Event - Base Schema** stores the basic information of Case Manager events.

All Case Manager Event schemas add to this base schema and will be available when extracting information for each specific channel (i.e. Cards, Transfers, Digital Activity or Payments).

Name	Type	Description	Example
timestamp	timestamp with time zone	The original timestamp of the object	2025-09-30 10:25:59.100 +0100
identifier	string	The original ID of the object	605e7f99-820b-45b2-ab5e-a4420dae675a

Name	Type	Description	Example
notification_timestamp	timestamp with time zone	The timestamp of when this notification took place	2025-09-30 10:25:59.100 +0100
notification_type	string	The notification type. Is one of the following: • EVENT_ARRIVAL: Indicates this is an event arrival • EVENT_STATUS: Indicates this is a status change on the event • EVENT_USER: Indicates a user was assigned/unassigned to/from the event • EVENT_QUEUE: Indicates the event was added/removed to/from a queue • EVENT_NOTE: Indicates a note was added/removed to/from an event • EVENT_RELATED_TRANSACTIONS: Indicates that related transactions were added/removed to/from the event	
event_version_id	string	The unique ID for a specific version of an event, used to track updates or state changes.	4c168e62-48af-4cf3-8948-7e93b32a3f9c
event_version_timestamp	bigint	The timestamp of the specific event version.	1588700503112
event_tenant	string	The tenant of the event.	feedzai
is_alert	boolean	Indicates whether this event is an alert or not	
access_group_id	string	The ID for the group of users that can view the event, used to control data visibility.	europe_analysts
user_id	string	The Id of the user that made the change. This is only available for event arrival, event queue, event status and event user notification types.	
user_name	string	The Id of the user that made the change. This is only available for event note, event status and event user.	
queue_id	double	The id of the queue the event is in This is only available for event arrival, event queue, event status and event user.	
queue_name	string	The name of the queue the event was added to. This only exists for event queue.	
state	string	The event status. This only exists for event status.	
state_machine_id	string	The id of the state machine that changed. This only exists on event status.	
note	string	The note added to this event. This only exists on event note and event status.	
reasons	array<row>	The list of the status and their corresponding value. This only exists on event status.	
status_reason_id	string	The ID of the status reason provided for the status change	975c5ab6-bd2f-4567-8ae3-6026742f4036
status_reason_status_id	string	The status of this status change	fraud
status_reason_name	string	The human-readable name of the status reason provided for the status change	Confirmed Fraud

Name	Type	Description	Example
state_machines	map<string, string>	The map of state machines and their corresponding value. This only exists on event arrival, queue, status and user.	
related_transactions	json	The list of related transactions for the event. This only exists on EVENT_RELATED_TRANSACTIONS type.	{ "rule_001":[{"identifier":"txn_003", "channel":"payments", "timestamp":"2025-10-29 17:12:07.844000 UTC"}], "rule_002":[{"identifier":"txn_004", "channel":"payments", "timestamp":"2025-10-29 15:27:07.844000 UTC"}]}
_year	integer	Year of the export	2011
_month	integer	Month of the export	10
_day	integer	Day of the export	15
_hour	integer	Hour of the export	13