


•

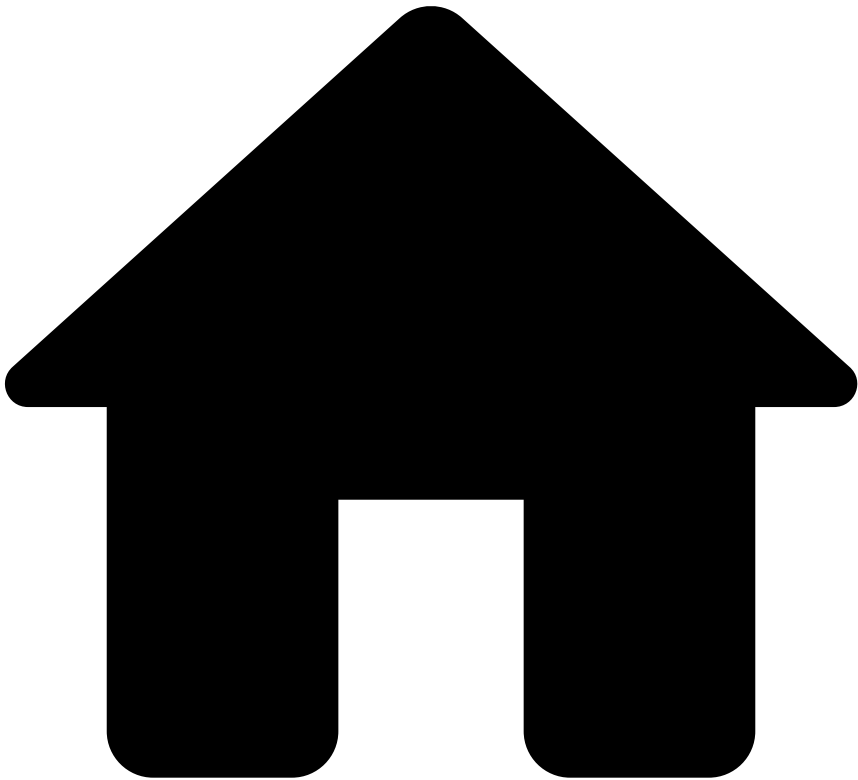

- [References](#)
- [Data Exporting Tool](#)
- Event Storage
- Event Storage - Cards

Event Storage - Cards

Was this page helpful?

The **Event Storage - Cards** entity stores card related events, such as authorizations, information and clearings.

A new record becomes available for this entity for every card transaction processed by the risk engine.

↩ ↗

Name	Type	Description	Example
account_associated_cards	array<string>	List of the PANs (hashed or tokenized) associated with the account.	["PAN1", "PAN2", ..., "PAN N"]
account_limits	array<row>	The account limits.	

Name	Type	Description	Example
event_type	string	The type of events associated with this limit.	
day_amount	bigint	Total amount on the account day period	123
daily_amount	bigint	Total daily amount	100
night_amount	bigint	Total amount on the account night period	123
single_day_amount	bigint	Single transaction amount limit on the day period.	333
single_night_amount	bigint	Single transaction amount limit on the night period.	222
start_day_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
start_night_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
amount_fees	array<row>	Fees associated with this transaction. This is a constructed data element comprising up to six sets of 36-digit values. ISO 8583, DE 46: Amount fees	
fee_type	string	Fee type associated to the transaction	
fee_amount	bigint	Fee amount (in cents)	
fee_conversion_rate	double	Fee conversion rate	
fee_reconciliation_amount	bigint	The original amount of the fee expressed in the reconciliation currency (in cents)	
customer_accounts	array<row>	Set of tuples with information on all customer accounts.	
account_id	string	A bank's internal account number. This field is optional and cannot be used as a replacement for account_iban . Feedzai	
account_iban	string	International Bank Account Number (IBAN) in ISO 13616:2020 format or any bank account unique identifier. This field should be sent as a token or hash. Example: 482924bf58091603ed69c5bd1221ad67481bfca8	
	string		

Name	Type	Description	Example
account_bic		Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code. Example: DABAIE2D	
account_open_date	bigint	Opening date of the account (in milliseconds since the Unix epoch).	
account_balance	bigint	Current account balance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_credit_limit	bigint	Account credit limit (in cents or equivalent). Not relevant for debit. For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_open_to_buy_limit	bigint	Account open-to-buy limit: the available amount between the account balance and unused credit limit (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_available_credit	bigint	Available credit within the credit limit provided by the bank (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_debt_balance	bigint	Account's debt balance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_cash_advance_balance	bigint	Debt amount in an account due to cash advance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_status	string	The status of the account. Possible values: <code>open</code> , <code>blocked</code> .	
account_last_activity	bigint	Identifies the timestamp of the last activity registered at this account (in milliseconds since the Unix epoch).	
account_number_of_cards	integer	The number of cards associated with this account.	
account_tc1	string	Account type code 1. Optional code that identifies the type of account to be updated for debits and inquiries ("from" account). Used in conjunction with transaction type code (ttc). For example, 10 = Savings account - default. ISO 8583	
account_tc2	string	Account type code 2. Optional code that identifies the type of account to be updated for credits ("to" account). Used in conjunction with transaction type code (ttc). For example, 50 = Investment account - default. ISO 8583	
account_l	bigint		

Name	Type	Description	Example
ast_payment_date		Date when the customer pays off the balance on the account (in milliseconds since the Unix epoch).	
account_last_payment_amount	bigint	Amount of the last payment made on the account (in cents).	
account_type	string	Type of account (e.g. credit, debit, investment).	
account_currency	string	Currency of the account (ISO 4217 code).	
account_password_change_flag	boolean	For deployments that do not include Digital Activity, you can use this field to detect if the customer changed the password on the account. This refers to whether the password is changed over the last day or within a single session. Feedzai	
account_rewards_used_count	integer	The number of times that the customer used the rewards.	
account_debt_payment_method	string	Payment method of outstanding balance on the account. Example: Visa	
customer_cards	array<row>	Set of tuples with information on customer cards.	
card_pan	string	'The primary account number (PAN), or simply a card number, is the card identifier found in payment cards, such as credit cards and debit cards. This field can be sent in the multiple formats (from most to least secure): - token - hash - encrypted - clear text. For PCI compliance, follow the security guidelines to protect the data: 1) When data is sent as clear text or encrypted, then it's mandatory to use Feedzai Tokenizer. 2) When data is sent as hash, then Feedzai Tokenizer is recommended (if not used, it will be disabled). 3) When data is sent as token, then Feedzai Tokenizer is not necessary and will be disabled. ISO 8583, DE 2: Primary Account Number'	
card_bin	string	Card's bank identification number. A card BIN comprises the first 4 to 8 digits of a card PAN. Feedzai Example: 123456	
card_effective_date	string	Year and month in which the card becomes effective (YYYYMM). Example: 211901	
card_expiry	string		

Name	Type	Description	Example
expiration_date		Specifies the expiration date of the card (YYMM). ISO 8583, DE 9: Conversion rate reconciliation	
card_type	string	Specifies whether the card is debit, credit.	
card_brand	string	Card brand. Example: Visa	
card_last4	string	Last four digits of the card PAN.	
card_id	string	Persistent unique card ID (even after operations that might lead to an ID change, such as card re-issuing). Feedzai	
card_category	string	Specifies whether the card is 'business' or 'consumer'. Feedzai Example: consumer	
card_program	string	Specifies whether the card is black, platinum, etc.	
card_country_code	string	Represents the country (in accordance with ISO 3166, Alpha-2) where the card was issued. Feedzai	
card_format	string	The card format. The possible values are: virtual, physical, and other.	
card_status	string	The status of the card (e.g. active, blocked, expired).	
card_available_balance	bigint	The available balance on the card (in cents or equivalent).	
card_transaction_amount_limit	bigint	Maximum transaction amount allowed on the card (in cents or equivalent).	
cardholder_name	string	The full name of the cardholder.	
card_issued_date	bigint	Date when the card was issued (in milliseconds since the Unix epoch). Feedzai	
card_first_activation_date	bigint	Date of the first activation of this card (in milliseconds since the Unix epoch). Feedzai	
original_amount_data	row		
currency	string		EUR

Name	Type	Description	Example
		The amount of data elements from the original transaction. ISO 8583 , DE 30: Amounts original (Field 1)	
amount_currency_unit	integer	The reconciliation amount of data elements from the original transaction. ISO 8583, DE 30: Amounts original (Field 2)	2
amount	bigint	Original receiver amount	314
original_rec_amount_data	row	The amount of data elements from the original transaction. ISO 8583	
amount_currency	string	The amount of data elements from the original transaction. ISO 8583 , DE 30: Amounts original (Field 1)	EUR
amount_currency_unit	integer	The reconciliation amount of data elements from the original transaction. ISO 8583, DE 30: Amounts original (Field 2)	2
amount	bigint	Original receiver amount	314
rules_explanations	string	Explanation of rules triggered in text format.	Rule X triggered because X amount surpasses the Y limit.
rules_ids	string	Identifier of the rules.	
action_names	string		
decision	string	Output decision from the system.	approve
fdz_partition_index	integer	Partition index.	79
fdz_tenant_key	string	Tenant key from Feedzai perspective.	sample_value
fdz_timestamp	bigint	Unix timestamp.	1756463007000
fdz_uuid	string	UUID from Feedzai perspective.	d392378a-f4b2-49b5-8814-e3ea65543420
is_alert	string	Identifies whether the event is an alert.	True
acceptor_additional_contact_info	string	'Card acceptor additional contact information. ISO 8583, DE 43: Card acceptor name/location (Field 10)'	3248371648
acceptor_certificate_number	string	'Value assigned to a card acceptor certificate issued by the acquirer's certificate authority. ISO 8583, DE 34: Electronic commerce data (Field 7)'	680a503b53268a615b7b2d8b81a61e2c5e38c68a
acceptor_city	string	'Card acceptor city. ISO 8583, DE 43: Card acceptor name/location (Field 4)'	Andersonbury
acceptor_country_code	string	'Card acceptor country code (in accordance with ISO 3166, Alpha-2). ISO 8583, DE 43: Card acceptor name/location (Field 7)'	US
acceptor_customer_service_phone	string	'Card acceptor customer service phone number. ISO 8583, DE 43: Card acceptor name/location (Field 9)'	42340072319124
acceptor_dba_name	string	'"Merchant Does Business As" name. Feedzai'	Hunt, Harris and Ruiz
	string		

Name	Type	Description	Example
acceptor_email		'Card acceptor email address. ISO 8583, DE 43: Card acceptor name/location (Field 12)'	
acceptor_id	string	'Code used to uniquely identify the card acceptor originating a transaction; this code is also referred to as Merchant Identifier, or "MID". ISO 8583, DE 42: Card acceptor identification code'	c7a2c7c5850fc9625a015ea0c2ea1d61635763d6
acceptor_latitude	double	Latitude of the acceptor. This location derives from GPS coordinates. Feedzai	
acceptor_longitude	double	Longitude of the acceptor. This location derives from GPS coordinates. Feedzai	
acceptor_mastercard_risk	integer	Risk level of the acceptor determined by Mastercard. Ranges from 0 to 999. Feedzai	
acceptor_name	string	'Name of the card acceptor as known to the cardholder. ISO 8583, DE 43: Card acceptor name/location (Field 2)'	Hunt, Harris and Ruiz
acceptor_open_date	integer	Represents the date from which the acceptor is active (in milliseconds since the Unix epoch). Feedzai	
acceptor_phone	string	'Card acceptor phone number. ISO 8583, DE 43: Card acceptor name/location (Field 8)'	3240396761
acceptor_phone_val_code	string	Acceptor phone validation code indicates whether the acceptor phone number is valid. Feedzai	A
acceptor_region	string	'Card acceptor region code. ISO 8583, DE 43: Card acceptor name/location (Field 5)'	CA
acceptor_risk	integer	Represents the risk level of the acceptor determined by the issuing bank. Ranges from 0 to 5. Feedzai	
acceptor_risky_flag	boolean	Indicator on whether the acceptor is considered to be risky or not. Feedzai	
acceptor_street_addr	string	'Card acceptor street address. ISO 8583, DE 43: Card acceptor name/location (Field 3)'	6316 Christopher Ramp Suite 987
acceptor_tax_number	string	Merchant's tax number. Feedzai	91-83714
acceptor_url	string	'Card acceptor internet URL. ISO 8583, DE 43: Card acceptor name/location (Field 11)'	huntharrisruiz.com
acceptor_visa_risk	integer	Risk level of the acceptor determined by Visa. Ranges from 0 to 99. Feedzai	
acceptor_zip	string	'This data element is used to convey the ZIP code or postal code of the merchant's or card acceptor's registered location. ISO 8583, DE 43: Card acceptor name/location (Field 6)'	64465
account_available_credit	integer	Available credit within the credit limit provided by the bank (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
account_balance	integer	Current account balance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	

Name	Type	Description	Example
account_bic	string	Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code. Feedzai	DABAIE2D
account_cash_advance_balance	integer	Debt amount in an account due to cash advance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
account_credit_limit	integer	Account credit limit (in cents or equivalent). Not relevant for debit. For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
account_currency	string	Currency associated with the account. Refers to accounts' balances and credit limit. Feedzai	USD
account_debt_balance	integer	Account's debt balance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
account_debt_payment_method	string	Payment method of outstanding balance on the account. Feedzai	Visa
account_digital_signature	string	'A digital signature created by the private part of the private/public key pair supplied by a card issuer to a cardholder and linked to the cardholder's account on which the card is issued. ISO 8583, DE 34: Electronic commerce data (Field 2)'	b1367b34bfe36c56fa1e1e53a9326105ba59be1d
account_iban	string	International Bank Account Number (IBAN) in ISO 13616:2020 format or any bank account unique identifier. This field should be sent as a token or hash. Feedzai	482924bf58091603ed69c5bd1221ad67481bfca8
account_id	string	A bank's internal account number. This field is optional and cannot be used as a replacement for account_iban . Feedzai	c0e68e4e-215f-47cb-b3cd-0d67a9ad881f
account_last_activity	integer	Identifies the timestamp of the last activity registered at the account (in milliseconds since the Unix epoch). Feedzai	
account_last_payment_amount	integer	Amount of the last payment made on the account (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
account_last_payment_date	integer	Date when the customer pays off the balance on the account (in milliseconds since the Unix epoch). Feedzai	
account_number_of_cards	integer	Number of cards associated with the account. Feedzai	
account_open_date	integer	Opening date of the account (in milliseconds since the Unix epoch). Feedzai	
account_otb_limit	integer	Account open-to buy-limit is the available amount between the account balance and unused credit limit (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
	boolean		

Name	Type	Description	Example
account_pw_change_flag		For deployments that do not include Digital Activity, you can use this field to detect if the customer changed the password on the account. This refers to if the password is changed over the last day or within a single session. Feedzai	
account_rewards_used_count	integer	The number of times that the customer used the rewards. Feedzai	
account_status	string	'Status of the account. Possible values: open , blocked , closed , waiting_for_kyc . Feedzai'	open
account_type	string	Type of the account. For example, savings or main account. Feedzai	savings
acquirer_id	string	'Identifies the acquiring institution. ISO 8583, DE 32: Acquiring institution identification code'	18493716481
acquirer_number	string	'Identifies the acquirer"s merchant. ISO 8583, DE 31: Acquirer reference number (Field 2)'	789342
acquirer_sequence_number	string	'Data supplied by the acquirer. ISO 8583, DE 31: Acquirer reference number (Field 4)'	18472819401
action_code	string	'The result code returned to indicate whether the transaction is approved or declined. ISO 8583, DE 39: Action code / Result code'	0000
amount	integer	'Transaction amount in the original currency as specified by the currency_code field, in cents or equivalent (e.g. 1000 to represent \$10.00). ISO 8583, DE 4: Amount transaction (Field 3)'	
application_transaction_counter	integer	The 4-character numeric (binary) Application Transaction Counter contains the counter value maintained by the chip card. The chip card increments this value for each transaction (including failed transactions)	
approval_code	string	'Code used when the transaction is approved. ISO 8583, DE 38: Approval Code'	019201
atc1	string	'Account type code 1. Optional code that identifies the type of account to be updated for debits and inquiries ("from" account). Used in conjunction with transaction type code (ttc). For example, 10 = Savings account - default. ISO 8583, DE 3: Processing Code (Field 2)'	10
atc2	string	'Account type code 2. Optional code that identifies the type of account to be updated for credits ("to" account). Used in conjunction with transaction type code (ttc). For example, 50 = Investment account - default. ISO 8583, DE 3: Processing Code (Field 3)'	50
auth_agent_id	string	'The authorizing agent institution identification code. ISO 8583, DE 58: Authorizing agent institution identification code.'	17281947362
auth_type	string	Authentication option used by the consumer during the payment process. Feedzai	fingerprint
avs_code	string		A

Name	Type	Description	Example
		'Defines the result of the address verification process. ISO 8583, DE 49: Verification Data (Field 2 - Response)'	
business_app_transfer_purpose	string	Contains information about the payment's purpose	AA
capture_date	string	'Month and day of the capture (MMDD). ISO 8583, DE 17: Date of capture'	0820
card_available_balance	integer	The card available balance (in cents or equivalent). For example, for debit cards, this could be the total account amount, which can include an overdraft facility. For credit cards, this is often limited to the card credit limit amount or remaining unspent credit amount. For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
card_bin	string	Card's bank identification number. A card BIN comprises the first 4 to 8 digits of a card pan. Feedzai	123456
card_brand	string	Card Brand. Feedzai	Visa
card_category	string	Specifies whether the card is 'business' or 'consumer'. Feedzai	consumer
card_country_code	string	Represents the country (in accordance with ISO 3166, Alpha-2) where the card was issued. Feedzai	US
card_credit_limit	integer	Card credit limit (in cents or equivalent, e.g.), as set by the institution according to the cardholder profile. For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
card_credit_score	integer	Credit Bureau (or similar institution) credit score of the cardholder. Useful for client onboarding, and as context on an individual in Case Manager. Feedzai	
card_effective_date	string	'Identifies the year and month in which the card becomes effective (YYYYMM). ISO 8583, DE 13: Date effective'	211901
card_expected_payments_frequency	string	'The frequency defined with the bank to repay the credit card debt. Possible values: monthly , weekly , bi_weekly .'	monthly
card_expiration_date	string	'Specifies the expiration date of the card (YYMM). ISO 8583, DE 9: Conversion rate reconciliation'	2405
card_first_activation_date	integer	Date of the first activation of this card (in milliseconds since the Unix epoch). Feedzai	
card_format	string	'The card format. The possible values are: virtual, physical and other'	physical
card_id	string	Persistent unique card ID (even after operations that might lead to an ID change, such as card re-issuing). Feedzai	eb7a757cc59081a84fe7f827b649e9c6c7b12338
	integer		

Name	Type	Description	Example
card_issued_date		Date when the card was issued (in milliseconds since the Unix epoch). Feedzai	
card_issuer	string	Identifies the issuing institution. Feedzai	Issuer Bank
card_last4	string	Card's last 4 digits. Feedzai	1234
card_number_of_cardholders	integer	Number of cardholders associated with the card. For example, in the case of joint accounts, it is possible to have multiple cardholders associated with a card. Feedzai	
card_pan	string	'The primary account number (PAN), or simply a card number, is the card identifier found in payment cards, such as credit cards and debit cards. This field can be sent in the multiple formats (from most to least secure): - token - hash - encrypted - clear text. For PCI compliance, follow the security guidelines to protect the data: 1) When data is sent as clear text or encrypted, then it's mandatory to use Feedzai Tokenizer. 2) When data is sent as hash, then Feedzai Tokenizer is recommended (if not used, it will be disabled). 3) When data is sent as token, then Feedzai Tokenizer is not necessary and will be disabled. ISO 8583, DE 2: Primary Account Number'	8955060600182663
card_presence_flag	boolean	'Flag indicating whether the card was present during the transaction. ISO 8583, DE 61: Point of Service (POS) Data (Field 5)'	
card_program	string	Specifies whether the card is black, platinum, gold , silver, etc. Feedzai	silver
card_seq_number	string	'Used to distinguish between separate cards with the same primary account number. ISO 8583, DE 23: Card sequence number'	001
card_status	string	Status of the card (active, blocked, under validation, etc.). Feedzai	active
card_transaction_amount_limit	integer	Card's amount limit that can be spent per transaction (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
card_type	string	Specifies whether the card is debit, credit, pre-paid, etc. Useful for tuning risk strategy thresholds based on the type of card. Feedzai	credit
card_verification_data	string	'Number that is only printed on the card which is not included in any other technology e.g. magnetic stripe or ICC. ISO 8583, DE 49: Verification Data (Field 2)'	0129
cardholder_additional_id	string	'Identification number on the additional identification document. ISO 8583, DE 49: Verification Data (Field 7)'	bb066a51bcfa18b42ac7c646ce012fce5b394c88
cardholder_additional_id_type	string	'Represents additional identification offered by the cardholder. ISO 8583, DE 49: Verification Data (Field 6)'	passport
cardholder_authentication_verification_value	string	'CAVV Results Code. Contains a one-character code that indicates the following: - The classification of the transaction, i.e. either an authentication transaction, where the Issuer	2

Name	Type	Description	Example
		ACS has created the CAVV, or an <code>attempts</code> transaction, where the Visa Attempts Server has created the CAVV - For an authentication transaction, where the Issuer ACS has created the CAVV - For an <code>attempts</code> transaction, where the Visa Attempts Server has created the CAVV'	
<code>cardholder_bill_amount</code>	integer	'Amount billed to the cardholder in the issuing bank's currency, exclusive of cardholder billing fees, as specified by the <code>cardholder_bill_currency_code</code> field, in cents or equivalent (e.g. 1000 to represent \$10.00). It should be consistent across all transactions as this value is used to calculate profiles in a unified currency. ISO 8583, DE 6: Amount, cardholder billing'	
<code>cardholder_bill_conv_rate</code>	double	'Factor used in the conversion from transaction to cardholder billing amount. ISO 8583, DE 10: Conversion rate, cardholder billing'	
<code>cardholder_bill_currency_code</code>	string	'Code defining the currency of <code>cardholder_bill_amount</code> , usually where the account is based (in accordance with ISO 4217, Alpha-3). ISO 8583, DE 51: Currency code, cardholder billing'	USD
<code>cardholder_bill_street_address</code>	string	'Cardholder billing street address. ISO 8583, DE 49: Verification Data (Field 3)'	707 Valerie Corners
<code>cardholder_bill_zip</code>	string	'ZIP of the cardholder billing address. ISO 8583, DE 49: Verification Data (Field 4)'	70783
<code>cardholder_certificate_number</code>	string	'Value assigned to a cardholder certificate issued by the card issuer's certificate authority. ISO 8583, DE 34: Electronic commerce data (Field 6)'	13e3acec30b1dd45689afbd914d2074af222195b
<code>cardholder_compress_bill_addr</code>	string	'Represents only the numeric and postcode elements of the cardholder billing address. ISO 8583, DE 49: Verification Data (Field 5)'	707 70783
<code>cardholder_name</code>	string	Cardholder name. Feedzai	John Doe
<code>cardholder_presence_indicator</code>	string	'Indicator informing about the presence of the cardholder. ISO 8583, DE 61: Point of Service (POS) Data (Field 4)'	1
<code>cardholder_verification_rule</code>	string	'A Cardholder Verification Rule (CVR) consists of 2 bytes: the first indicates the type of Cardholder Verification Method (CVM) to be used, while the second specifies in which condition this CVM will be applied'	
<code>company_id</code>	string	Company ID. Feedzai	c3ae6b7f-1605-4c38-a7dc-e67819559a82
<code>currency_code</code>	string	'This code specifies the original currency in which transactions are conducted in, and consequently defines the currency for the <code>amount</code> field (in accordance with ISO 4217, Alpha-3). ISO 8583, DE 4: Amount transaction (Field 1)'	EUR
<code>currency_unit</code>	integer	'Indicates the number of places that the decimal point of the <code>amount</code> field is moved to the left, starting from the rightmost numeric digit. For	

Name	Type	Description	Example
		example, if the currency is US dollar and the amount is 1000, a currency_unit: 2 represents \$10.00. ISO 8583, DE 4: Amount transaction (Field 2)'	
customer_citizen_id_number	string	Identification number defined in the citizen identity document associated with the customer's home country. Feedzai	42611351
customer_city	string	Customer city. Feedzai	South Leahfort
customer_country_code	string	Customer country code (in accordance with ISO 3166, Alpha-2). Feedzai	US
customer_country_code_change_flag	boolean	Whether the customer is performing the first payment after changing country. This is a reference data field. Feedzai	
customer_currency	string	Currency associated with the customer. Refers to customers' total balance and credit limit. Feedzai	USD
customer_dob	string	Customer date of birth (YYYYMMDD). Feedzai	20871211
customer_driver_license	string	Customer driver's license. Feedzai	F4540525
customer_email	string	Customer email. Feedzai	
customer_email_change_flag	boolean	For deployments that do not include Digital Activity, you can use this field to detect if the customer is performing the first payment after changing email. This refers to if the email is changed over the last day or within a single session. This is a reference data field. Feedzai	
customer_id	string	'A unique transaction identifier that should remain consistent across multiple events (auth, info, clearing) associated with the same transaction. ISO 8583, DE 21: Transaction life cycle identification data (Field 2)'	87b2ee22cb0004722a7265fdbbf7be98c681a3bb
customer_kyc_lvl	string	Know Your Customer (KYC) level. This is a reference data field. Feedzai	A
customer_name	string	Customer name. Feedzai	John Doe
customer_number_of_accounts	integer	Number of accounts associated with the customer. Feedzai	
customer_number_of_cards	integer	Number of cards associated with the customer. Feedzai	
customer_occupation	string	Customer's main professional activity. Feedzai	actor
customer_occupation_status	string	Customer's current occupation status. Feedzai	employee
customer_passport_number	string	Customer passport number. Feedzai	640635130
customer_phone	string	Customer phone number. Feedzai	217823554

Name	Type	Description	Example
customer_phone_change_flag	boolean	For deployments that do not include Digital Activity, you can use this field to detect if the customer is performing the first payment after changing phone number. This refers to if the phone number is changed over the last day or within a single session. This is a reference data field. Feedzai	
customer_phone_val_code	string	Indicates whether the customer phone number is valid. Feedzai	partially valid
customer_region	string	Customer region code. Feedzai	WA
customer_registration_date	integer	Customer registration date (in milliseconds since the Unix epoch). Feedzai	
customer_risk_rating	string	Customer's risk rating. Feedzai	A
customer_segment	string	Customer's segment within the banks' segmentation. Feedzai	retail
customer_ssn	string	Customer social security number. Feedzai	204541535
customer_street_addr	string	Customer street address. Feedzai	2087 Laura Courts Suite 109
customer_tax_number	string	Customer tax number. Feedzai	951755612
customer_total_balance	integer	Sum of the balances on all customer's accounts (in cents or equivalent). This is a reference data field and can be used to calculate overall balance (debit and credit) to compare against an individual transaction. For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
customer_total_credit_limit	integer	Sum of the credit limit on all customer's accounts (in cents or equivalent). This is a reference data field. For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Feedzai	
customer_zip	string	The customer's registered ZIP code, i.e. the postal code from the customer's residential address registered with the bank. This is a reference data field. Feedzai	62986
cvv2_presence_indicator	string	Code provided by the merchant to indicate whether the CVV2 value is on the card	0
cvv_val_code	string	CVV validation code. Feedzai	1432
destination_id	string	'Identification code of the destination which is maintained throughout the life of the transaction. ISO 8583, DE 93: Transaction destination identification code'	18391847582
device_fingerprint	string	Information collected about the software and hardware of the device used to perform the transaction. Could be encrypted information used for device enrichment. Feedzai	0400YbjucgPeDpqN9ZBLUITS+9VZ4/+YT+qYutCN/R8/6uxqb6W7w==
device_id	string	Unique identification number assigned to a device and should be consistent across all transactions. This could come from a computer's	JRO03C

Name	Type	Description	Example
		CPU serial number, MAC address or browser fingerprint. Using the IP address is not recommended. If you use Digital Trust, then this field is optional. Feedzai	
device_ip	string	The IP of the device used to perform the transaction. Feedzai	13.8.170.179
device_ip_country_code	string	The country code derived from the device's IP (in accordance with ISO 3166, Alpha-2). Feedzai	US
device_ip_latitude	double	Device IP latitude. This location derives from the web connection. Feedzai	
device_ip_longitude	double	Device IP longitude. This location derives from the web connection. Feedzai	
device_language	string	Device language code. Feedzai	US
digital_wallet_token	string	Contains the token information of tokenized transactions	
digital_wallet_token_assurance_level	string	Contains the token assurance level value information of tokenized transactions	00
digital_wallet_token_requester	string	Contains the token requester ID information of tokenized transactions	40010030273
digital_wallet_token_type	string	Contains the token type information of tokenized transactions	Q
digital_wallet_tokenized_transaction	boolean	Identifies transactions that are tokenized (PANs replaced with a VISA/Mastercard provided cloud-based token)	
dispute_end_date	integer	Timestamp corresponding to the moment when the dispute was closed (in milliseconds since the Unix epoch). Labeling	
dispute_feedback_notes	string	Notes related to the dispute feedback event. Labeling	The client has called to open a dispute on a transaction that was not made by him.
dispute_notes	string	Contextual information left by the analyst at the time of the dispute opening. Dispute	
dispute_reason	string	Why the dispute was opened. Possible reasons: - duplicate - Cardholder claims multiple charges for the same product or service; - fraudulent - Cardholder claims an unauthorized payment. This can happen if the card was lost or stolen and used to make a fraudulent purchase. It can also happen if the cardholder does not recognize the payment as it appears on the billing statement sent by the card issuer; - subscription_canceled - Cardholder claims continuous charges after the subscription being canceled; - product_unacceptable - Cardholder claims that a received product or service is defective, damaged, or not as described; - product_not_received - Cardholder claims an unreceived purchased of products or services; - unrecognized - Cardholder claims an unrecognized payment	

Name	Type	Description	Example
		appearing on the card statement; - <code>credit_not_processed</code> - Cardholder claims that the purchased product was returned or the transaction was otherwise canceled, but the merchant has not yet provided a refund or credit; - <code>general</code> - Uncategorized dispute. Dispute'	
<code>dispute_refunded</code>	string	'Whether the funds were refunded to the cardholder. Possible values: <code>no_refund</code> , <code>partial_refund</code> , <code>total_refund</code> . Labeling'	partial_refund
<code>dispute_start_date</code>	integer	Timestamp that corresponds to the time when the dispute was opened (in milliseconds since the Unix epoch). Dispute	
<code>dispute_submitted_by</code>	string	'Who submitted the dispute. Possible values: <code>issuer</code> or <code>acquirer</code> . Dispute'	
<code>event_external_id</code>	string	Unique identifier, on the customer's platform, of this event. Feedzai	4048611b295e993d1b561d9030c53424bbf2b95e
<code>event_occurred_at</code>	integer	Timestamp corresponding to the moment when the current event occurred (i.e. is not the original event in the case of Info and Clearing events, with the exception of the Pre-decided Info events; in milliseconds since the Unix epoch). Feedzai	
<code>feedback_type</code>	string	'It identifies the different types of feedback. Supported values: - <code>out_of_band</code> for conclusions of out-of-band communication - <code>chargeback</code> for closing disputes. If <code>feedback_type</code> equals <code>out_of_band</code> , the required fields are <code>oob_response_type</code> and <code>oob_end_date</code> . If <code>feedback_type</code> equals <code>chargeback</code> , the required fields are <code>dispute_refunded</code> and <code>dispute_end_date</code> . Labeling'	out_of_band
<code>feedback_value</code>	boolean	This field only applies to the Feedback endpoint and refers to value that should be associated with the <code>feedback_label</code> . For example, if the label is <code>fraud</code> , the value <code>true</code> labels the transaction as fraudulent and the value <code>false</code> labels as non-fraudulent. Labeling	
<code>file_transfer_ack_code</code>	string	'Indicates whether the sender requires an acknowledgement from the receiver. When this sub-element indicates <code>acknowledgement required</code> , the sender shall not transmit any other notification or instruction message before receiving a notification acknowledgement or instruction acknowledgement message. ISO 8583, DE 68: Batch/file transfer message control (Field 1)'	7
<code>file_transfer_seq_number</code>	string	'Provides the unique sequence number assigned to the message within the batch. ISO 8583, DE 68: Batch/file transfer message control (Field 2)'	00000001
<code>first_recurring_payment</code>	boolean	Whether the payment is the first occurrence of a series of recurring payments set up by the customer with the same amount and with the same payee. Feedzai	
	string		19382917391

Name	Type	Description	Example
forwarding_institution_id		'Code identifying the forwarding institution. Not used when the acquirer and the card issuer can communicate directly. ISO 8583, DE 33: Forwarding institution identification code'	
function_code	string	'Purpose of a message within its message class. It adds granularity about the message type, e.g. type of authorization or verification transaction, type of financial presentment. ISO 8583, DE 24: Function code'	841
info_type	string	'It indicates the sub-type of the info event and helps to determine why the event is being sent. Supported values: - dispute - not_honor - additional_info - pre_decided . In case of dispute , not_honor or additional_info , this field updates an existing transactional event. When it's pre_decided , this field creates a new transactional event that has already been decided by the source system, i.e. the bank. Feedzai'	dispute
julian_processing_date	string	'Date that the acquirer processed the original transaction, e.g. first presentment. ISO 8583, DE 31: Acquirer reference number (Field 3)'	8241
last_sca_at	integer	Timestamp corresponding to the last time that the consumer performed Strong Customer Authentication (SCA). Feedzai	
lifecycle_id	string	'Unique transaction identifier. ISO 8583, DE 21: Transaction life cycle identification data (Field 2)'	1df7a7qg78vd7fs
lifecycle_indicator	string	'Indicates the point in the transaction life cycle at which the life cycle trace identifier is assigned. ISO 8583, DE 21: Transaction life cycle identification data (Field 1)'	1
lifecycle_seq_number	string	'Used with the life cycle trace identifier to uniquely identify when multiple financial presentments are generated from a single authorization transaction. ISO 8583, DE 21: Transaction life cycle identification data (Field 3)'	01
lifecycle_token	string	'Represents a code calculated using an algorithm against key transaction data elements that are common to both authorization messages and financial presentment messages. ISO 8583, DE 21: Transaction cycle identification data (Field 4)'	2718
local_datetime	string	'Identifies the local year, month, day, and time in which the transaction takes place at the location of the card acceptor in Authorization and Financial Presentment messages (YYYYMMDDhhmmss). ISO 8583, DE 12: Date and time local transaction'	20181201012233
login_session_id	string	Deprecated - Use 'session_id' instead.	fb2e77d
luhn_check_digit	integer	'Check sum on the previous 22 digits of acquirer reference number calculated in accordance with ISO 7812-1. ISO 8583, DE 31: Acquirer reference number (Field 5)'	
malware_flag	boolean		

Name	Type	Description	Example
		Indicates whether the device is infected with malware. Feedzai	
mc_fraud_score	integer	Master card fraud score	
mcc	string	'The merchant category code (MCC) classifies the type of business being done by the card acceptor for this transaction (in accordance with ISO 18245). ISO 8583, DE 26: Merchant category code (MCC)'	4722
merchant_initiated	boolean	Whether the transaction was initiated by a merchant / acceptor, e.g. a recurring payment. Feedzai	
mti	string	'The Message Type Indicator (MTI) is a four-digit numeric field which indicates the overall function of the message. A message type indicator includes the ISO 8583 version, the Message Class, the Message Function, and the Message Origin. For example, 0110 indicates an authorization. ISO 8583 '	0110
oob_comm_type	string	'The type of communication made with the client. Possible values: sms , call , email . Out of Band'	
oob_end_date	integer	Timestamp corresponding to the moment when the client responded to the out-of-band communication (in milliseconds since the Unix epoch). Labeling	
oob_feedback_notes	string	Notes related to the out-of-band feedback event. Labeling	The client has confirmed that he didn't make the transaction.
oob_notes	string	Notes related to the out-of-band communication. Out of Band	
oob_response_type	string	'The type of out-of-band response made by the client. For example, possible values are: call , sms , email , branch , or any other value deemed necessary by the client. Note that this field is required if the feedback_type field has the value out_of_band . Labeling'	call
oob_start_date	integer	Timestamp that corresponds to the moment when the client was contacted (in milliseconds since the Unix epoch). Out of Band	
originator_id	string	'Identification code of the originator which is maintained throughout the life of the transaction. ISO 8583, DE 94: Transaction originator identification code'	18493049285
pos_acceptor_disp_data_len	integer	'Represents the number of characters of data from a card issuer that can be displayed on the POS for the cardholder. ISO 8583, DE 27: Point of service capability (Field 7)'	
pos_acceptor_rec_data_len	integer	'Represents the number of characters of data from a card issuer that can be printed on a POS receipt for the card acceptor. ISO 8583, DE 27: Point of service capability (Field 5)'	
pos_approval_code_len	integer	'Represents the maximum length of the approval code which the acquirer may accommodate. The	

Name	Type	Description	Example
		card issuer or agent shall limit the approval code to this length. ISO 8583, DE 27: Point of service capability (Field 3)'	
pos_card_capture_cap	string	'Indicates if the card can be captured. ISO 8583, DE 27: Point of service capability (Field 10)'	N
pos_card_read_method	string	'Series of code values indicating the card reading capabilities employed during the transaction, such as magnetic swipe, EMV, or manual entry. Each issuer can define their own code values to specify the POS entry mode for Card Present transactions. For example: 01 - manual entry; 02 - magnetic stripe; 91 - contactless card; 95 - smart card. ISO 8583, DE 22: Point-of-Service data code (Field 7)'	01
pos_cardholder_disp_data_len	integer	'Identifies the card issuer data to be displayed on the POS for the cardholder. ISO 8583, DE 27: Point of service capability (Field 6)'	
pos_cardholder_rec_data_len	integer	'Represents the number of characters of data from a card issuer that can be printed on a POS receipt for the cardholder. ISO 8583, DE 27: Point of service capability (Field 4)'	
pos_cardholder_ver_cap	string	'Series of code values that indicate the POS capabilities available to identify the cardholder. ISO 8583, DE 27: Point of service capability (Field 2)'	8080
pos_cardholder_ver_method	string	'Series of code values that indicate the cardholder verification method (CVM) used by the POS to identify the cardholder. Each issuer can define their codes. For example: 0 - Fail CVM processing; 1 - Plaintext PIN verification performed by ICC (Integrated Circuit Card); 2 - Enciphered PIN verified on-line; 3 - Plaintext PIN AND Signature-Paper; 4 - Enciphered PIN by ICC; 5 - Enciphered PIN by ICC AND Signature-Paper; 30 - Signature-Paper; 31 - No CVM required ISO 8583, DE 22: Point-of-Service data code (Field 8)'	31
pos_environment	string	'Series of code values that indicate if the card acceptor was present. Typically, this field takes the values CP (for Card Present) or CNP (for Card Not Present). If more granularity is required, use pos_card_read_method to specify the POS entry mode for Card Present. If not present, you can use this field to also indicate the type of environment in which the transaction took place. Card Not Present transactions could be, for example, MOTO (from mail order/Telephone order) or WEB. This field may be relevant as a machine learning model feature. ISO 8583, DE 22: Point-of-Service data code (Field 4)'	CP
pos_icc_data_len	integer	'Number of characters of data from a card issuer that can be returned to the ICC at the POS. ISO 8583, DE 27: Point of service capability (Field 8)'	
pos_pin_len_cap	integer	'Number of PIN digits that the point of service device can accept. ISO 8583, DE 27: Point of service capability (Field 11)'	

Name	Type	Description	Example
pos_read_cap	string	'Series of code values that indicate the card reading capabilities of the POS. ISO 8583, DE 27: Point of service capability (Field 1)'	8080
pos_security_characteristics	string	'Series of codes that indicate the security characteristics applicable to a transaction. This field may be relevant as a machine learning model feature. ISO 8583, DE 22: Point-of-Service data code (Field 2)'	0001
pos_track1_data	string	'Information encoded on the track 1 of the magnetic stripe 2 including field separators and excluding the start sentinel, end sentinel and longitudinal redundancy check ("LRC") characters. ISO 8583, DE 45: Track 1 data'	6239184a00000120768=08021010912346567?4
pos_track2_data	string	'Information encoded on track 2 of the magnetic stripe as specified in ISO 7813, excluding beginning and ending sentinels and longitudinal redundancy check characters as defined therein. ISO 8583, DE 35: Track 2 data'	6759184500000120768=08051010912346567?4
pos_track3_data	string	'Information encoded on track 3 of the magnetic stripe as specified in ISO 4909, including field separators, but excluding beginning and ending sentinels and longitudinal redundancy check characters as defined therein. ISO 8583, DE 36: Track 3 data'	6333000012345679=08051010912345078901?7
pos_track3_rw	string	'Indicates if the POS can rewrite Track 3. ISO 8583, DE 27: Point of service capability (Field 9)'	Y
proxy_flag	boolean	Whether the device IP is a proxy. Feedzai	
reason_code	string	'Provides the receiver of a request, advice or notification message with the reason, or purpose of that message. For original authorizations and financial presentments, it identifies why the type of message was sent, e.g. why an advice versus a request. For other messages it identifies states why this action was taken. ISO 8583, DE 25: Message Reason Code'	8002
receiving_institution_id	string	'Code identifying the receiving institution. Not used when the acquirer and the card issuer can communicate directly. ISO 8583, DE 100: Receiving institution identification code'	18493059382
reconciliation_amount	integer	'Reconciliation amount in the currency specified by the reconciliation_currency_code field, in cents or equivalent (e.g. 1000 to represent \$10.00). ISO 8583, DE 5: Amount Reconciliation (Field 3)'	
reconciliation_conv_rate	double	'Factor used in the conversion from transaction to cardholder billing amount. ISO 8583, DE 9: Conversion rate reconciliation'	
reconciliation_currency_code	string	'Code defining the currency of the reconciliation_amount (in accordance with ISO 4217, Alpha-3). ISO 8583, DE 5: Amount Reconciliation (Field 1)'	EUR
reconciliation_currency_unit	integer	'Indicates the number of places that the decimal point of the reconciliation_amount field is moved to the left, starting from the rightmost numeric digit. For example, if the reconciliation	

Name	Type	Description	Example
		currency is US dollar and the reconciliation amount is 1000, a reconciliation_currency_unit: 2 represents \$10.00. ISO 8583, DE 5: Amount Reconciliation (Field 2)'	
reconciliation_date	string	'The year, month and day for which financial totals are reconciled between the acquirer and the card issuer (YYYYMMDD). ISO 8583, DE 28: Date reconciliation'	20180829
reconciliation_indicator	string	'A value used to allow reconciliation of time periods within a reconciliation date. The value is subject to bilateral agreement. ISO 8583, DE 29: Reconciliation indicator'	223
recurring_payment	boolean	Whether the payment is part of a series of recurring payments set up by the customer with the same amount and with the same payee. Feedzai	
reference_fraud_rate	double	Fraud rate for card payments. Calculated as the total value of unauthorized or fraudulent remote transactions, divided by the total value of all remote card transactions, in the previous calendar quarter (i.e. three-month window). Feedzai	
retrieval_reference_number	string	'Reference supplied by the system retaining the original source information and used to assist in locating that information or a copy thereof. ISO 8583, DE 37: Retrieval reference number'	129829381948
return_amount	integer	'New actual amount (in cents) necessary to perform a partial or full reversal of a financial transaction or a partial completion amount. ISO 8583, DE 95: Replacement Amounts (Field 1).'	
secure_3d_indicator	string	'Identifies the authentication method used by the Issuerâ€™s ACS to authenticate the cardholder (e.g. risk-based authentication, OTP, etc.) '	2
secure_3d_protocol_version	string	Authentication data. Includes the 3-D Secure Protocol version number	2.x.x
secure_3d_validation_code	string	3D secure validation code. Feedzai	558251
secure_3d_validation_status	string	3D secure validation status. Possible values are failed , passed , and disabled . Feedzai (PSD2)	passed
service_code	string	'Identifies the geographic/service availability (in accordance with ISO 7813). ISO 8583, DE 40: Service code'	001
session_id	string	Id of the session that the user logged into. This should be consistent across all events within the same banking session, including payment initiations as it will be used to associate events to a session. Feedzai	9be65da3-ec5d-45c0-93c0-03afc5f7633b
sic	string	Standard industrial classification merchant category code. Feedzai	2000
stan	string	'System trace audit number. This field is assigned by a transaction originator to assist in uniquely identifying a transaction. The trace	103405661402

Name	Type	Description	Example
		number remains unchanged for all messages within a two-message exchange, e.g. request/repeat and response. ISO 8583, DE 11: Systems trace audit number (STAN)'	
tenant_id	string	"	
terminal_city	string	Terminal city. Feedzai	Yvetteville
terminal_country_code	string	Terminal country code (in accordance with ISO 3166, Alpha-2). Feedzai	US
terminal_id	string	'Applicable to Card Present transactions. This field represents the card acceptor terminal identification number. ISO 8583, DE 41: Card acceptor terminal identification'	44b77c377266be3ca36ee2b5bcedde09222d346a
terminal_ip	string	IP of the terminal address. Feedzai	13.59.108.243
terminal_ip_city	string	Estimated city of the terminal based on IP. Feedzai	Yvetteville
terminal_ip_country_code	string	Estimated country code (in accordance with ISO 3166, Alpha-2) of the terminal based on IP. Feedzai	US
terminal_ip_latitude	double	Estimated latitude of the terminal based on IP. This location derives from the web connection. Feedzai	
terminal_ip_longitude	double	Estimated longitude of the terminal based on IP. This location derives from the web connection. Feedzai	
terminal_ip_region	string	Estimated region of the terminal based on IP. Feedzai	CA
terminal_ip_zip	string	Estimated ZIP of the terminal based on IP. Feedzai	73412
terminal_latitude	double	Latitude coordinate of the terminal. This location derives from GPS coordinates. Feedzai	
terminal_longitude	double	Longitude coordinate of the terminal. This location derives from GPS coordinates. Feedzai	
terminal_poc_flag	boolean	Whether the terminal was previously a point of compromise (POC). Feedzai	
terminal_region	string	Terminal region code. Feedzai	CA
terminal_street_addr	string	Street address where the terminal is located. Feedzai	66192 Stephen Bridge Suite 829
terminal_timezone	string	Time zone in which the terminal is located expressed as +/- hh:mm format (using UTC as reference). Feedzai	+01:00
terminal_zip	string	Terminal ZIP. Feedzai	73412
transaction_category_code	string	'Data object defined by MasterCard which indicates the type of transaction being performed, and which may be used in card risk management. ISO 8583, DE 55: TransactionCategoryCode_9F53 (EMV Tag)'	A
	integer	'Counter maintained by the terminal that is incremented by one for each transaction. ISO	

Name	Type	Description	Example
transaction_seq_counter		8583, DE 55: TransactionSequenceCounter_9F41 (EMV Tag)'	
transaction_status	string	'Indicates the different status of the transaction. Updates the same life cycle ID with an additional event entry. Possible values: - accepted - rejected - cancelled - reversed - refunded . Feedzai'	accepted
transaction_status_reason	string	'Explains the transaction status. Possible values are: - account_closed - The bank account has been closed; - account_frozen - The bank account has been frozen; - account_restricted - The bank account has restrictions on either the type, or the number, of payments allowed. This normally indicates that the bank account is a savings or other non-checking account; - account_ownership_changed - The bank account is no longer valid because its branch has changed ownership; - could_not_process - The bank could not process this payment; - debit_not_authorized - Debit transactions are not permitted on the account; - rejected - The bank has rejected this payment; - insufficient_funds - The user account has insufficient funds to cover the payout; - invalid_account_number - The account number is invalid; - incorrect_account_holder_name - The account holder name on file is incorrect; - invalid_currency - The bank was unable to process this payout because of its currency. This is probably because the bank account cannot accept payments in that currency; - no_account - No bank account could be located with these details; - unsupported_card - The bank no longer supports payouts to this card; - accepted - The bank processed the payment; - feedzai_unavailable - Feedzai was unavailable to score the transaction on the Authorization endpoint and it had to be sent to the Info endpoint, as a pre-decided transaction. Feedzai'	account_closed
transmission_datetime	string	'Specifies the date and time when the message initiator sends the message. This field is expressed in the Coordinated Universal Time (UTC) (in accordance with ISO 8601), in the format MMDDhhmmss. ISO 8583, DE 7: Date and time transmission'	1201112233
transstain	string	'A hash value calculated by applying a secure hash algorithm to the XID and card secret (a secret defined value known only to the cardholder and issuer of the cardholder certificate). ISO 8583, DE 34: Electronic commerce data (Field 9)'	e528318831716fa8a878e4f3c0e1fe5eeecbc292
trusted_acceptor	boolean	Whether the acceptor is included in the cardholder's list of trusted acceptors. Feedzai	
trx_to_rec_conv_date	string	'Month and day the conversion rate is effective to convert the transaction amount from the original to reconciliation currency (MMDD). ISO 8583, DE 9: Conversion rate reconciliation'	0829

Name	Type	Description	Example
ttc	string	'The Transaction Type Code (TTC) specifies the type of transaction. For example, 01 means Cash(ATM). ISO 8583, DE 3: Processing Code (Field 1)'	01
tvr	string	'Terminal verification result. ISO 8583, DE 55: TerminalVerificationResults_95 (EMV Tag)'	8080
user_format_id	string	'Identifier applied by the acquirer based on bilateral agreements. ISO 8583, DE 31: Acquirer reference number (Field 1)'	1
visa_fraud_score	integer	Visa fraud score	
xid	string	'Value assigned to a transaction as a unique transaction identifier. ISO 8583, DE 34: Electronic commerce data (Field 8)'	dca8c172f2d02402be16ab906b8db1024824b271
_year	integer	Year of the export	2011
_month	integer	Month of the export	10
_day	integer	Day of the export	15
_hour	integer	Hour of the export	13