


•

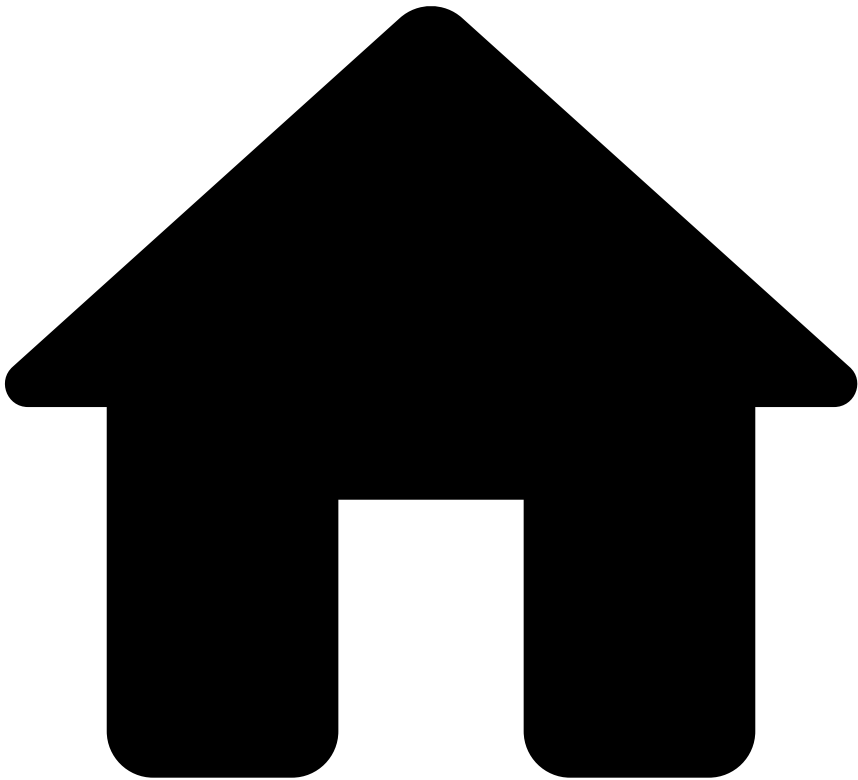

- [References](#)
- [Data Exporting Tool](#)
- Event Storage
- Event Storage - Digital Activity

Event Storage - Digital Activity

Was this page helpful?

The **Event Storage - Digital Activity** entity stores digital activity related events, such as authentication and alias.

A new record becomes available for this entity for every digital activity event processed by the risk engine.



Name	Type	Description	Example
account_active	string	Whether the account is active.	True
account_atc1	string		atc1

Name	Type	Description	Example
		Describes the account type affected for debits and inquiries and the "from" account for transfers.	
account_atc2	string	Describes the account type affected for credits and the "to" account for transfers.	Atc2
account_cards	array<string>	The cards associated with the account. Each value in the array corresponds to a persistent unique card ID (even after operations that might lead to an ID change such as card re-issuing).	['3135166684','3866457590']
account_currency	string	Currency associated with the account. Refers to accounts' balances and credit limit.	
account_customers	array<string>	The customers associated with the account. Each value in the array corresponds to a customer ID generated by the issuing bank.	['6618859991','7271539065']
card_credit_limit	bigint	Card credit limit (in cents, e.g.). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
card_credit_score	integer	Credit Bureau (or similar institution) credit score of the card.	40
card_expected_payments_frequency	string	New payment method of outstanding balance on the account.	card
card_first_activation_date	bigint	Date of the first activation of this card (in milliseconds since the Unix epoch).	30
card_format	string	The card format. The possible values are: virtual, physical and other.	physical
card_issued_date	bigint	Date when the card was issued (in milliseconds since the Unix epoch).	
card_last4	string	Card's last 4 digits.	1234
card_number_of_cardholders	integer	Number of cardholders associated with the card. For example, in the case of joint accounts it is possible to have multiple cardholders associated with a card.	
card_seq_number	string	Used to distinguish between separate cards with the same primary account number. ISO 8583, DE 23: Card sequence number	1
card_transaction_amount_limit	bigint	Card's amount limit that can be spent per transaction (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	
card_type	string	Whether the card is debit, credit, pre-paid, etc.	credit
card_verification_data	string	Number that is only printed on the card which is not included in any other technology (e.g. magnetic stripe or ICC). ISO 8583, DE 49: Verification Data (Field 2)	129
customer_accounts	array<row>	Set of tuples with information on all customer accounts.	
account_id	string	A bank's internal account number. This field is optional and cannot be used as a replacement for account_iban . Feedzai	

Name	Type	Description	Example
account_iban	string	International Bank Account Number (IBAN) in ISO 13616:2020 format or any bank account unique identifier. This field should be sent as a token or hash. Example: 482924bf58091603ed69c5bd1221ad67481bfca8	
account_bic	string	Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code. Example: DABAIE2D	
account_open_date	bigint	Opening date of the account (in milliseconds since the Unix epoch).	
account_balance	bigint	Current account balance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_credit_limit	bigint	Account credit limit (in cents or equivalent). Not relevant for debit. For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_open_to_buy_limit	bigint	Account open-to-buy limit: the available amount between the account balance and unused credit limit (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_available_credit	bigint	Available credit within the credit limit provided by the bank (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_debt_balance	bigint	Account's debt balance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_cash_advance_balance	bigint	Debt amount in an account due to cash advance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency).	
account_status	string	The status of the account. Possible values: <code>open</code> , <code>blocked</code> .	
account_last_activity	bigint	Identifies the timestamp of the last activity registered at this account (in milliseconds since the Unix epoch).	
account_number_of_cards	integer	The number of cards associated with this account.	
account_type_code_1	string	Account type code 1. Optional code that identifies the type of account to be updated for debits and inquiries ("from" account). Used in conjunction with transaction type code (ttc). For example, 10 = Savings account - default. ISO 8583	
	string	Account type code 2. Optional code that identifies the type of account to be updated for	

Name	Type	Description	Example
account_ttc2		credits ("to" account). Used in conjunction with transaction type code (ttc). For example, 50 = Investment account - default. ISO 8583	
account_last_payment_date	bigint	Date when the customer pays off the balance on the account (in milliseconds since the Unix epoch).	
account_last_payment_amount	bigint	Amount of the last payment made on the account (in cents).	
account_type	string	Type of account (e.g. credit, debit, investment).	
account_currency	string	Currency of the account (ISO 4217 code).	
account_password_change_flag	boolean	For deployments that do not include Digital Activity, you can use this field to detect if the customer changed the password on the account. This refers to whether the password is changed over the last day or within a single session. Feedzai	
account_rewards_used_count	integer	The number of times that the customer used the rewards.	
account_debt_payment_method	string	Payment method of outstanding balance on the account. Example: Visa	
customer_cards	array<row>	Set of tuples with information on customer cards.	
card_pan	string	'The primary account number (PAN), or simply a card number, is the card identifier found in payment cards, such as credit cards and debit cards. This field can be sent in the multiple formats (from most to least secure): - token - hash - encrypted - clear text. For PCI compliance, follow the security guidelines to protect the data: 1) When data is sent as clear text or encrypted, then it's mandatory to use Feedzai Tokenizer. 2) When data is sent as hash, then Feedzai Tokenizer is recommended (if not used, it will be disabled). 3) When data is sent as token, then Feedzai Tokenizer is not necessary and will be disabled. ISO 8583, DE 2: Primary Account Number'	
card_bin	string	Card's bank identification number. A card BIN comprises the first 4 to 8 digits of a card PAN. Feedzai Example: 123456	
card_effective	string	Year and month in which the card becomes effective (YYYYMM). Example: 211901	

Name	Type	Description	Example
active_date			
card_expiration_date	string	Specifies the expiration date of the card (YYMM). ISO 8583, DE 9: Conversion rate reconciliation	
card_type	string	Specifies whether the card is debit, credit.	
card_brand	string	Card brand. Example: Visa	
card_last4	string	Last four digits of the card PAN.	
card_id	string	Persistent unique card ID (even after operations that might lead to an ID change, such as card re-issuing). Feedzai	
card_category	string	Specifies whether the card is 'business' or 'consumer'. Feedzai Example: consumer	
card_program	string	Specifies whether the card is black, platinum, etc.	
card_country_code	string	Represents the country (in accordance with ISO 3166, Alpha-2) where the card was issued. Feedzai	
card_format	string	The card format. The possible values are: virtual, physical, and other.	
card_status	string	The status of the card (e.g. active, blocked, expired).	
card_available_balance	bigint	The available balance on the card (in cents or equivalent).	
card_transaction_amount_limit	bigint	Maximum transaction amount allowed on the card (in cents or equivalent).	
cardholder_name	string	The full name of the cardholder.	
card_issued_date	bigint	Date when the card was issued (in milliseconds since the Unix epoch). Feedzai	
card_first_activation_date	bigint	Date of the first activation of this card (in milliseconds since the Unix epoch). Feedzai	
	string	New whether the account is active.	"true"

Name	Type	Description	Example
new_account_active			
new_account_atc1	string	New account type affected for debits and inquiries and the "from" account for transfers.	atc1
new_account_atc2	string	New account type affected for credits and the "to" account for transfers.	atc2
new_account_available_credit	bigint	New available credit within the credit limit provided by the bank (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
new_account_balance	bigint	New current account balance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
new_account_bic	string	New Bank Identifier Code (BIC) - in SWIFT format or any other bank unique identifier code - of the account linked to this alias.	NWBK
new_account_cards	array<string>	New set of cards associated with the account. Each value in the array corresponds to a persistent unique card ID (even after operations that might lead to an ID change such as card re-issuing).	['3135166684', '3866457590']
new_account_cash_advance_balance	bigint	New debt amount in an account due to cash advance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
new_account_credit_limit	bigint	The new account credit limit (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	
new_account_currency	string	Currency associated with the new account. Refers to accounts' balances and credit limit. Feedzai	USD
new_account_customers	array<string>	New set of customers associated with the account. Each value in the array corresponds to a customer ID generated by the issuing bank.	['6618859991', '7271539065']
new_account_debt_balance	bigint	New account's debt balance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
new_account_debt_payment_method	string	New payment method of outstanding balance on the account.	card
new_account_last_activity	bigint	New timestamp of the last activity registered at the account (in milliseconds since the Unix epoch).	30
new_account_last_payment_amount	bigint	New amount of the last payment made on the account (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
new_account_last_payment_date	bigint	New date when the customer pays off the balance on the account (in milliseconds since the Unix epoch).	30
	integer	New number of cards associated with the account.	40

Name	Type	Description	Example
new_account_number_of_cards			
new_account_open_date	bigint	New opening date of the account (in milliseconds since the Unix epoch).	1625148450432
new_account_otb_limit	bigint	New account open to buy limit is the available amount between the account balance and unused credit limit (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
new_account_pw_change_flag	boolean	New whether the customer changed the password on the account.	True
new_account_rewards_used_count	integer	New number of times that the customer used the rewards.	40
new_account_status	string	New status of the account. Possible values: open, blocked, closed, waiting_for_kyc.	open
new_account_status_last_update_at	bigint	Timestamp of last update made to the customer's new account status (in milliseconds since the Unix epoch).	
new_account_type	string	Type of the account. For example, savings or main account. Feedzai	savings
new_account_limits	array<row>		
new_account_limit_event_type	string	The type of events associated with this limit.	
new_account_limit_day_amount	bigint	Total amount on the account day period	123
new_account_limit_daily_amount	bigint	Total daily amount	100
new_account_limit_night_amount	bigint	Total amount on the account night period	123
new_account_limit_single_day_amount	bigint	Single transaction amount limit on the day period.	333
new_account_limit_single_night_amount	bigint	Single transaction amount limit on the night period.	222
new_account_limit_start_day_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
new_account_limit_start_night_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
	bigint		

Name	Type	Description	Example
new_card_available_balance		The new card available balance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	
new_card_bin	string	Card's bank identification number.	123456
new_card_brand	string	Card brand.	Visa
new_card_category	string	Specifies whether the card is physical, virtual or digital.	physical
new_card_country_code	string	Represents the country (in accordance with ISO 3166, Alpha-2) where the card was issued.	US
new_card_credit_limit	bigint	The new card credit limit (in cents).	
new_card_credit_score	integer	The new card credit score.	
new_card_effective_date	string	Year and month in which the card becomes effective (CCYYMM).	201701
new_card_expected_payments_frequency	string	New payment method of outstanding balance on the account.	card
new_card_expiration_date	string	New specification of the expiration date of the card.	2001
new_card_first_activation_date	bigint	New date of the first activation of this card (in milliseconds since the Unix epoch).	30
new_card_format	string	The card format. The possible values are: virtual, physical and other.	physical
new_card_issued_date	bigint	Date when the card was issued (in milliseconds since the Unix epoch).	
new_card_issuer	string	Identifies the issuing institution.	
new_card_last4	string	Card's last 4 digits.	
new_card_number_of_cardholders	integer	Number of cardholders associated with the card. For example, in the case of joint accounts, it is possible to have multiple cardholders associated with a card.	
new_card_program	string	New specification whether the card is black, platinum, gold, silver, etc.	silver
new_card_sequence_number	string	New number used to distinguish between separate cards with the same primary account number.	
new_card_status	string	New status of the card (active, blocked, under validation, etc.).	
new_card_transaction_amount_limit	bigint	New card's amount limit that can be spent per transaction (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency and a currency unit of 2).	20
new_card_type	string	New specification whether the card is debit, credit, pre-paid, etc.	credit
	string		129

Name	Type	Description	Example
new_card_ver_data		New number that is only printed on the card which is not included in any other technology e.g. magnetic stripe or ICC.	
new_card_pan	string	The primary account number (PAN), or simply a card number, is the card identifier found in payment cards, such as credit cards and debit cards. This field can be sent in the multiple formats (from most to least secure): - token - hash - encrypted - clear text. For PCI compliance, follow the security guidelines to protect the data: 1) When data is sent as clear text or encrypted, then it's mandatory to use Feedzai Tokenizer. 2) When data is sent as hash, then Feedzai Tokenizer is recommended (if not used, it will be disabled). 3) When data is sent as token, then Feedzai Tokenizer is not necessary and will be disabled. ISO 8583, DE 2: Primary Account Number	8955060600182663
rules_explanations	string	Explanation of rules triggered in text format.	Rule X triggered because X amount surpasses the Y limit.
rules_ids	string	Identifier of the rules.	
action_names	string		
decision	string	Output decision from the system.	approve
fdz_partition_index	integer	Partition index.	79
fdz_tenant_key	string	Tenant key from Feedzai perspective.	sample_value
fdz_timestamp	bigint	Unix timestamp.	1756463007000
fdz_uuid	string	UUID from Feedzai perspective.	d392378a-f4b2-49b5-8814-e3ea65543420
is_alert	string	Identifies whether the event is an alert.	True
account_age	integer	The account age (i.e. the number of days since the opening of the bank account)	
account_id	string	The account Id used to log in	2802717d-82dc-4060-9e97-0157989ec55d
account_last_login_attempt_at	integer	Timestamp of last login attempt (in milliseconds since the Unix epoch)	
account_last_successful_login_at	integer	Timestamp of last successful login (in milliseconds since the Unix epoch)	
account_login_first_seen	integer	Timestamp of the account's first login (in milliseconds since the Unix epoch)	
account_open_date	integer	Account opening's timestamp (in milliseconds since the Unix epoch)	
account_status_last_update_at	integer	Timestamp of last update made to the customer account status (in milliseconds since the Unix epoch)	
alias_bank_account_bic	string	Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code linked to this alias	NWBK
	string	Number of the account linked to this alias	0000 0700 9312 3456 78

Name	Type	Description	Example
alias_bank_account_number			
alias_bank_account_sort_code	string	Sort code of the account linked to this alias	09-01-31
alias_last_added_at	integer	Timestamp of the last time an alias was added to this account number (in milliseconds since the Unix epoch)	
alias_registration_date	integer	Alias registration timestamp (in milliseconds since the Unix epoch)	
alias_type	string	'Alias type. Possible values are: phone, email, business_number, customer_id, qr_code, random_code, other'	email
alias_value	string	Alias value	
auth_level	string	'Level of authentication: 1fa, mfa'	mfa
auth_password_pasted_flag	boolean	Validates if the password was pasted by the user during the authentication	
auth_type	string	'Method used to authenticate. Possible values are: password, biometric, pin, other'	password
auth_username_pasted_flag	boolean	Validates if the username was pasted by the user during the authentication	
card_available_balance	integer	The card available balance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2).	
card_bin	string	Card's bank identification number.	123456
card_brand	string	Card Brand.	Visa
card_country_code	string	Represents the country (in accordance with ISO 3166, Alpha-2) where the card was issued.	US
card_id	string	Persistent unique card ID (even after operations that might lead to an ID change such as card re-issuing). Feedzai	eb7a757cc59081a84fe7f827b649e9c6c7b12338
card_issuer	string	Identifies the issuing institution.	Issuer Bank
card_status	string	Status of the card (active, blocked, under validation, etc.)	active
cardholder_name	string	Cardholder name.	John Doe
challenge_requested	boolean	Whether a second update (challenge) was performed for the current event	
challenge_status	string	'Challenge status. Possible values are: success, fail, pending, cancelled, unknown'	pending
challenge_status_fail_reason	string	'Reason why the challenge failed. Possible values are: cancelled, timeout, error, unknown'	cancelled
challenge_type	string	The method used by the customer to complete the challenge (e.g. PIN, 2FA, 3DS, ONE_TIME_CODE)	PIN

Name	Type	Description	Example
channel_type	string	'Bank channel the customer is accessing. Examples: web/online, mobile, branch, telephone and other'	web
credentials_attempts_remaining	integer	The remaining number of credential retrieval attempts	
credentials_exp_date	integer	Credentials' expiration timestamp (in milliseconds since the Unix epoch)	
credentials_last_update_at	integer	Timestamp of credentials' last changes (in milliseconds since the Unix epoch)	
customer_account_fraud_30d	integer	Number of account's confirmed frauds on the last 30 days	
customer_account_fraud_3d	integer	Number of account's confirmed frauds on the last 3 days	
customer_account_fraud_6m	integer	Number of account's confirmed frauds on the last 6 months	
customer_account_rejected_30d	integer	Number of account's rejected transactions on the last 30 days	
customer_account_rejected_3d	integer	Number of account's rejected transactions on the last 3 days	
customer_account_rejected_6m	integer	Number of account's rejected transactions on the last 6 months	
customer_account_rep_fraud_30d	integer	Number of account's reported frauds on the last 30 days	
customer_account_rep_fraud_3d	integer	Number of account's reported frauds on the last 3 days	
customer_account_rep_fraud_6m	integer	Number of account's reported frauds on the last 6 months	
customer_account_settle_30d	integer	Number of account's settlements on the last 30 days	
customer_account_settle_3d	integer	Number of account's settlements on the last 3 days	
customer_account_settle_6m	integer	Number of account's settlements on the last 6 months	
customer_active	boolean	Whether the customer is active.	
customer_activity_status	string	'Customer activity status. Possible values are: employed, unemployed, other'	employed

Name	Type	Description	Example
customer_address_last_updated_at	integer	Timestamp of last update made to the customer address (in milliseconds since the Unix epoch)	
customer_address	string	Customer address	757 Corner Street
customer_address_validated	boolean	Whether the customer address is validated.	
customer_alias	string	Customer's alias value. This field only applies when the payment is made with an alias, such as using email or phone number as the key to transfer the funds. An alias is mostly used in instant payments.	
customer_alias_dict_registry_date	integer	Date of registry - milliseconds - on DICT (Diretório de Identificadores de Contas Transacionais)	
customer_alias_fraud_30d	integer	Number of alias' confirmed frauds on the last 30 days	
customer_alias_fraud_3d	integer	Number of alias' confirmed frauds on the last 3 days	
customer_alias_fraud_6m	integer	Number of alias' confirmed frauds on the last 6 months	
customer_alias_last_update_time	integer	Identifies the timestamp of the date the customer's alias is updated (in milliseconds since the Unix epoch).	
customer_alias_registration_time	integer	Identifies the timestamp of the date the customer's alias is registered (in milliseconds since the Unix epoch).	
customer_alias_rejected_30d	integer	Number of alias' rejected transactions on the last 30 days	
customer_alias_rejected_3d	integer	Number of alias' rejected transactions on the last 3 days	
customer_alias_rejected_6m	integer	Number of alias' rejected transactions on the last 6 months	
customer_alias_rep_fraud_30d	integer	Number of alias' reported frauds on the last 30 days	
customer_alias_rep_fraud_3d	integer	Number of alias' reported frauds on the last 3 days	
customer_alias_rep_fraud_6m	integer	Number of alias' reported frauds on the last 6 months	
customer_alias_settle_30d	integer	Number of alias' settlements on the last 30 days	
customer_alias_settle_3d	integer	Number of alias' settlements on the last 3 days	

Name	Type	Description	Example
customer_alias_settle_6m	integer	Number of alias' settlements on the last 6 months	
customer_alias_status	string	The status of the customer's alias. The possible values are <code>active</code> and <code>deleted</code> .	active
customer_alias_type	string	Customer's alias type. This field only applies when the payment is made with an alias.	email
customer_branch_id	string	Customer branch id	960e6560-450f-401e-805a-b565becb4a45
customer_citizen_id_number	string	Identification number defined in the citizen identity document associated with the customer's home country.	
customer_city	string	Customer city	Rome
customer_contactoptout	boolean	Whether the customer opted out of receiving communications.	
customer_country_code	string	Customer country code (in accordance with ISO 3166, Alpha-2)	US
customer_currency	string	Currency associated with the customer. Refers to customers' total balance and credit limit.	USD
customer_dob	string	Customer date of birth (YYYYMMDD)	19730312
customer_driver_license	string	Customer driver's license.	F4540525
customer_email	string	Customer email	
customer_email_last_update_at	integer	Timestamp of last update made to the customer email address (in milliseconds since the Unix epoch)	
customer_email_validated	boolean	Whether the customer email is validated.	
customer_fraud_30d	integer	Number of customer's confirmed frauds on the last 30 days	
customer_fraud_3d	integer	Number of customer's confirmed frauds on the last 3 days	
customer_fraud_6m	integer	Number of customer's confirmed frauds on the last 6 months	
customer_gender	string	Customer gender.	female
customer_id	string	Customer's unique identifier	453b9489-6c57-4b87-b1e5-8468faf07b26
customer_kyc_lvl	string	Know your customer (KYC) level.	A
customer_mothersname	string	Customer mother's name.	Jane Doe
customer_name	string	Customer name	Keneth Boyle
customer_number_of_accounts	integer	Number of accounts associated with the customer.	
	integer	Number of cards associated with the customer.	

Name	Type	Description	Example
customer_number_of_cards			
customer_occupation	string	Customer occupation	actor
customer_passport_number	string	Customer passport number.	640635130
customer_phone_last_update_at	integer	Timestamp of last update made to the customer phone number (in milliseconds since the Unix epoch)	
customer_phone_number	string	Customer phone number	3240396761
customer_phone_val_code	string	Indicates whether the customer phone number is valid.	partially valid
customer_preferred_language	string	Customer preferred language	en-US
customer_pwd	string	Customer's person with disability status.	visual impairment
customer_region	string	Customer region	CA
customer_registration_date	integer	Customer registration date (in milliseconds since the Unix epoch).	
customer_rejected_30d	integer	Number of customer's rejected transactions on the last 30 days	
customer_rejected_3d	integer	Number of customer's rejected transactions on the last 3 days	
customer_rejected_6m	integer	Number of customer's rejected transactions on the last 6 months	
customer_report_fraud_30d	integer	Number of customer's reported frauds on the last 30 days	
customer_report_fraud_3d	integer	Number of customer's reported frauds on the last 3 days	
customer_report_fraud_6m	integer	Number of customer's reported frauds on the last 6 months	
customer_reported_income	integer	Amount of annual income reported by the customer.	5000
customer_risk_rating	string	Customer's risk rating.	A
customer_segment	string	Specifies the segment of the payment channel (e.g. retail_banking, business_banking, commercial_banking)	retail_banking
customer_settle_30d	integer	Number of customer's settlements on the last 30 days	
customer_settle_3d	integer	Number of customer's settlements on the last 3 days	
customer_settle_6m	integer	Number of customer's settlements on the last 6 months	
customer_ssn	string	Customer social security number.	204541535
	string	Customer tax number.	951755612

Name	Type	Description	Example
customer_tax_number			
customer_total_balance	integer	Sum of the balances on all customer's accounts (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2).	
customer_total_credit_limit	integer	Sum of the credit limit on all customer's accounts (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2).	
customer_type	string	Customer type.	individual
customer_username	string	Customer username.	johnDoe
customer_zip_area_code	string	Customer ZIP area code	77334
customer_zip_code	string	Customer ZIP code	77334-3501
daily_amount_limit	integer	Maximum daily amount that can be spent for this account	
device_account_id	string	Unique device identification of a device/account combination	a85044ba0c1d45dbb64fedde94c16923
device_android_id	string	The device Android ID	723dc71eec6ccb31
device_app_version	string	App version	1.0
device_bot	boolean	Indicates the presence of BOT-like behavior during the use of the digital channel	
device_brand	string	The user's visible brand name, and whose product/hardware will be associated with, if any	Samsung
device_browser	string	The browser used by the device	Chrome
device_browser_language	string	The device's browser language code	en-US
device_browser_no_tracking	boolean	Whether the device browser has no tracking enabled	
device_browser_private_mode	boolean	Whether the device browser has private mode enabled	
device_browser_version	string	The browser version this device is using	89.0.4389.72
device_cbf	string	The device CBF	723dc71eec6ccb31
device_city	string	Device city	London
device_cookies_enabled	boolean	Whether cookies are enabled on this device's browser	
device_country_code	string	Device country code (in accordance with ISO 3166, Alpha-2)	US
	string	Email associated with the device.	

Name	Type	Description	Example
device_email_addr			
device_emulator	boolean	Indicates that the digital channel is being used via an emulated device	
device_fingerprint	string	Information collected about the software and hardware of the device used to perform the transaction. Could be encrypted information used for device enrichment. Feedzai	0400YbjucgPeDpqN9ZBLUITS+9VZ4/+YT+qYutCN/R8/6uxqb6W7w==
device_first_seen	integer	Timestamp of the first time a device Id was seen (in milliseconds since the Unix epoch)	
device_flash_enabled	boolean	Whether Flash is enabled on this device	
device_flash_version	string	The Flash code this device is using	32.0.0.465
device_id	string	Device from which the event was initiated	6a340affb04e4c3a97754828d6c6b550
device_imei	string	IMEI, required if the request originated from a mobile device	49015420323751
device_ip_address	string	Device IP address	13.59.108.243
device_ip_address_location	string	Address location of the device. Device information	Manchester
device_ip_botnet_intensity	integer	A measurement of the frequency of suspected botnet activity associated with the IP address. This is a ranking between 0-10 where 0 indicates minimal botnet activity and 10 is a very high frequency of botnet activity.	
device_ip_city	string	The device IP's city	London
device_ip_country_code	string	The device IP's country	US
device_ip_first_seen	integer	Timestamp of the first time a device IP was seen (in milliseconds since the Unix epoch)	
device_ip_latitude	double	Latitude corresponding to the location where the device IP is at.	25.582727
device_ip_longitude	double	Longitude corresponding to the location where the device IP is at	-17.295952
device_ip_proxy	boolean	Whether the device IP corresponds to a proxy	
device_ip_proxy_type	string	Type of proxy used (e.g. Anonymous, Hidden)	Hidden
device_ip_region	string	The device IP's region	CA
device_is_new	boolean	Whether the device has never been seen before.	
device_isp	string	The Internet Service Provider used by the device	Verizon
device_isp_country_code	string	The country code of the Internet Service Provider used by the device (in accordance with ISO 3166, Alpha-2)	US

Name	Type	Description	Example
device_isp_region	string	'The region of the Internet Service Provider used by the device '	CA
device_javascript_enabled	boolean	Whether JavaScript is enabled on this device	
device_language	string	The device language settings	en-US
device_last_update_at	integer	Timestamp of device's last registration, change or deletion in this account (in milliseconds since the Unix epoch)	
device_latitude	double	Latitude corresponding to the location where the device is at	12.343423
device_longitude	double	Longitude corresponding to the location where the device is at	29.234232
device_mac_address	string	The device Mac Address	20:f4:78:dd:33:9b
device_malware	boolean	Indicates the presence of malware in the customer's device during the use of the digital channel	
device_mobile_system_root_detection_disabled	boolean	Whether the user has attempted to hide detection of rooting or jailbreaking.	
device_mobile_system_simulator	boolean	Whether the transaction was initiated from a simulator.	
device_model	string	The end user's device model name (empty for desktop)	iPhone6
device_network_type	string	The device network type	STD
device_os	string	Device operating system	WINDOWS NT 6.3
device_os_language	string	The device's operating system language code	en-us
device_os_version	string	The device's operating system version	10.10.3
device_phishing	boolean	Whether a phishing flag was detected	
device_phone_number	string	Device phone number	4378630800
device_rat	boolean	Indicates the presence of remote access to the customer's device during the use of the digital channel	
device_region	string	Device region	CA
device_registered	boolean	Whether the device has been registered	false
device_registration_date	integer	Device registration's timestamp (in milliseconds since the Unix epoch)	
	string		low

Name	Type	Description	Example
device_risk_rating		Risk mapped according to the enricher policy score (low, medium, high)	
device_risk_reason	string	Risk mapped according to the enricher policy score	Device_Negative_History
device_risk_score	integer	Risk mapped according to the enricher policy score (0-999)	
device_rooted	boolean	Indicates that the device in use has been jailbroken/rooted	
device_screen_height	integer	The device screen's total height in pixels	
device_screen_width	integer	The device screen's total width in pixels	
device_serial_id	string	The device serial ID	12345678
device_session_duration	integer	The device session duration in milliseconds	
device_timezone	string	Device timezone	+01:00
device_tor	boolean	Whether the request is coming from a TOR-enabled network	
device_type	string	Type of device from which the event was initiated	web browser
device_user_agent	string	User Agent string from browser. Required if the request originated from a web browser	Mozilla/5.0 (Linux; Android 8.0.0; SM-G960F Build/R16NW) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/62.0.3202.84 Mobile Safari/537.36
device_username	string	Device hostname	Daisey's phone
event_external_id	string	Event's unique identifier on the customer's platform	4048611b295e993d1b561d9030c53424bbf2b95e
event_occurred_at	integer	Timestamp of the current event occurred in the client's system (in milliseconds since the Unix epoch)	
event_status	string	'Status of the update attempt. The possible values are: success, fail'	success
event_status_fail_reason	string	'Reason why the update fails. The possible values are: invalid_credentials, device_verification_failed, captcha_failed, challenge_failed, other'	invalid_credentials
event_sub_type	string	'Event sub-type. Possible values: new_device, change_device, delete_device'	new_device
fake_location	string	Includes information when the geolocation is fake	Geolocation is fake
fuzzy_device_id	string	'Device"s unique fingerprint. It identifies the device even if cookies/persistent objects have been deleted or if a user has invoked "Private Browsing Mode"'	19473c81b27f47fb90a077b6da3587b7
lifecycle_id	string	Unique identifier update	ce8e8f0e-a0da-4d26-a0a0-6e71b33a13c1
max_daily_amount_limit	integer	The upper limit for the maximum daily amount that can be spent for this account	

Name	Type	Description	Example
network_bssid	string	'Basic Server Set Identifier '	router
network_ssid	string	Service Set Identifier - the wifi network name	network_name
new_alias_bank_account_bic	string	New Bank Identifier Code (BIC) - in SWIFT format or any other bank unique identifier code - of the account linked to this alias	NWBK
new_alias_bank_account_number	string	New number of the account linked to this alias	0000 0700 9312 3456 78
new_alias_bank_account_sort_code	string	New sort code of the account linked to this alias	53-44-31
new_alias_last_added_at	integer	Timestamp of the last time an alias was added to this account number (in milliseconds since the Unix epoch)	
new_alias_registration_date	integer	New alias registration timestamp (in milliseconds since the Unix epoch)	
new_alias_type	string	'New alias type. Possible values are: phone, email, business_number, customer_id, qr_code, random_code, other'	email
new_alias_value	string	New alias value	
new_credentials_attempts_remaining	integer	The new remaining number of credential retrieval attempts	
new_credentials_exp_date	integer	New credentials' expiration timestamp (in milliseconds since the Unix epoch)	
new_credentials_last_updated_at	integer	Timestamp of the last changes made to new credentials (in milliseconds since the Unix epoch)	
new_customer_addr_last_updated_at	integer	Timestamp of last update made to the new customer's address (in milliseconds since the Unix epoch)	
new_customer_address	string	New address associated with this account	
new_customer_email_addr	string	New email address associated with this account	
new_customer_email_last_updated_at	integer	Timestamp of last update made to the new customer's email address (in milliseconds since the Unix epoch)	
new_customer_phone_last_updated_at	integer	Timestamp of last update made to the new customer's phone number (in milliseconds since the Unix epoch)	
new_customer_phone_number	string	New phone number associated with this account	1-970-664-2654
new_customer_username	string	New username associated with this account	amos.luetngen
new_daily_amount_limit	integer	New maximum daily amount that can be spent for this account	

Name	Type	Description	Example
new_device_account_id	string	Unique device identification of a device/account combination	a85044ba0c1d45dbb64fedde94c16923
new_device_android_id	string	The device Android ID	723dc71eec6ccb31
new_device_app_version	string	App version	1.0
new_device_bot	boolean	Indicates the presence of BOT-like behavior during the use of the digital channel	
new_device_brand	string	The user's visible brand name, and whose product/hardware will be associated with, if any	Samsung
new_device_browser	string	Browser of the new device associated with this account	Chrome
new_device_browser_language	string	Browser language of the new device associated with this account	en-US
new_device_browser_no_tracking	boolean	Whether the device browser has no tracking enabled	
new_device_browser_private_mode	boolean	Whether the device browser has private mode enabled	
new_device_browser_version	string	Browser version of the new device associated with this account	89.0.4389.72
new_device_cbf	string	The device CBF	723dc71eec6ccb31
new_device_city	string	City of the new device associated with this account	Arronbury
new_device_cookies_enabled	boolean	Whether cookies are enabled on this device's browser	
new_device_country_code	string	Country of the new device associated with this account	US
new_device_email	string	Email address of the new device associated with this account	
new_device_emulator	boolean	Indicates that the digital channel is being used via an emulated device	
new_device_first_seen	integer	Timestamp of the first time a device Id was seen (in milliseconds since the Unix epoch)	
new_device_flash_enabled	boolean	Whether Flash is enabled on this device	
new_device_flash_version	string	The Flash code this device is using	32.0.0.465
new_device_id	string	Id of the new device that is being associated with this account	6a340affb04e4c3a97754828d6c6b550
new_device_imei	string	IMEI, required if the request originated from a mobile device	49015420323751
new_device_ip_address	string	Device IP address	13.59.108.243

Name	Type	Description	Example
new_device_ip_city	string	The device IP's city	London
new_device_ip_country_code	string	The device IP's country	US
new_device_ip_first_seen	integer	Timestamp of the first time a device IP was seen (in milliseconds since the Unix epoch)	
new_device_ip_latitude	double	Latitude corresponding to the location where the device IP is at.	25.582727
new_device_ip_longitude	double	Longitude corresponding to the location where the device IP is at	-17.295952
new_device_ip_proxy	boolean	Whether the device IP corresponds to a proxy	
new_device_ip_proxy_type	string	Type of proxy used (e.g. Anonymous, Hidden)	Hidden
new_device_ip_region	string	The device IP's region	CA
new_device_ipsp	string	The Internet Service Provider used by the device	Verizon
new_device_ipsp_country_code	string	The country code of the Internet Service Provider used by the device (in accordance with ISO 3166, Alpha-2)	US
new_device_ipsp_region	string	'The region of the Internet Service Provider used by the device '	CA
new_device_javascript_enabled	boolean	Whether JavaScript is enabled on this device	
new_device_language	string	Language of the new device associated with this account	en-US
new_device_latitude	double	Latitude corresponding to the location where the device is at	12.343423
new_device_longitude	double	Longitude corresponding to the location where the device is at	29.234232
new_device_mac_address	string	The device Mac Address	20:f4:78:dd:33:9b
new_device_malware	boolean	Indicates the presence of malware in the customer's device during the use of the digital channel	
new_device_model	string	Model of the new device associated with this account	iPhone6
new_device_network_type	string	The device network type	STD
new_device_os	string	Device operating system	WINDOWS NT 6.3
new_device_os_language	string	The device's operating system language code	en-us
new_device_os_version	string	The device's operating system version	10.10.3
	boolean	Whether a phishing flag was detected	

Name	Type	Description	Example
new_device_phishing			
new_device_phone_number	string	Phone number of the new device associated with this account	893-631-5041
new_device_remote_access	boolean	Indicates the presence of remote access to the customer's device during the use of the digital channel	
new_device_region	string	Device region	CA
new_device_registered	boolean	Whether the device has been registered	false
new_device_registration_date	integer	Device registration's timestamp (in milliseconds since the Unix epoch)	
new_device_risk_rating	string	Risk mapped according to the enricher policy score (low, medium, high)	low
new_device_risk_reason	string	Risk mapped according to the enricher policy score	Device_Negative_History
new_device_risk_score	integer	Risk mapped according to the enricher policy score (0-999)	
new_device_rooted	boolean	Indicates that the device in use has been jailbroken/rooted	
new_device_screen_height	integer	The device screen's total height in pixels	
new_device_screen_width	integer	The device screen's total width in pixels	
new_device_serial_id	string	The device serial ID	12345678
new_device_session_duration	integer	The device session duration in milliseconds	
new_device_timezone	string	Timezone of the new device associated with this account	+01:00
new_device_tor	boolean	Whether the request is coming from a TOR-enabled network	
new_device_type	string	Type of device from which the event was initiated	web browser
new_device_user_agent	string	User Agent string from browser. Required if the request originated from a web browser	Mozilla/5.0 (Linux; Android 8.0.0; SM-G960F Build/R16NW) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/62.0.3202.84 Mobile Safari/537.36
new_device_user_name	string	Device hostname	Daisey's phone
new_fuzzy_device_id	string	'Device's unique fingerprint. It identifies the device even if cookies/persistent objects have been deleted or if a user has invoked 'Private Browsing Mode'	19473c81b27f47fb90a077b6da3587b7
new_payee_account_type	string	Account type of the new payee (business, personal, savings)	
new_payee_alias_type	string		email

Name	Type	Description	Example
		'New payee alias type. Possible values: phone, email, business_number, customer_id, qr_code, random_code, other'	
new_payee_alias_value	string	New payee alias	
new_payee_bank_account_bic	string	New payee's Bank Identifier Code (BIC) - in SWIFT format or any other bank unique identifier code - added to this account	NWBK
new_payee_bank_account_number	string	Bank account number of the new payee	0000 0700 9312 3456 78
new_payee_bank_account_sort_code	string	Sort code of the new payee that is being added to this account	09-01-31
new_payee_last_added_at	integer	Timestamp of last time a new payee was added to the account (in milliseconds since the Unix epoch)	
new_payee_name	string	First name of the new payee	Bea Smith
previous_auth_result	string	'Result of previous authentication attempt. Possible values are: success, fail'	success
session_id	string	The session Id used to log in. This should be consistent across all events within the same banking session, including payment initiations, as it will be used to associate events with a session	b6afe37d-2b05-4104-98be-1cbf25327e95
session_register_date	integer	Session first seen timestamp, (in milliseconds since the Unix epoch)	
tenant_id	string	"	
_year	integer	Year of the export	2011
_month	integer	Month of the export	10
_day	integer	Day of the export	15
_hour	integer	Hour of the export	13