


•

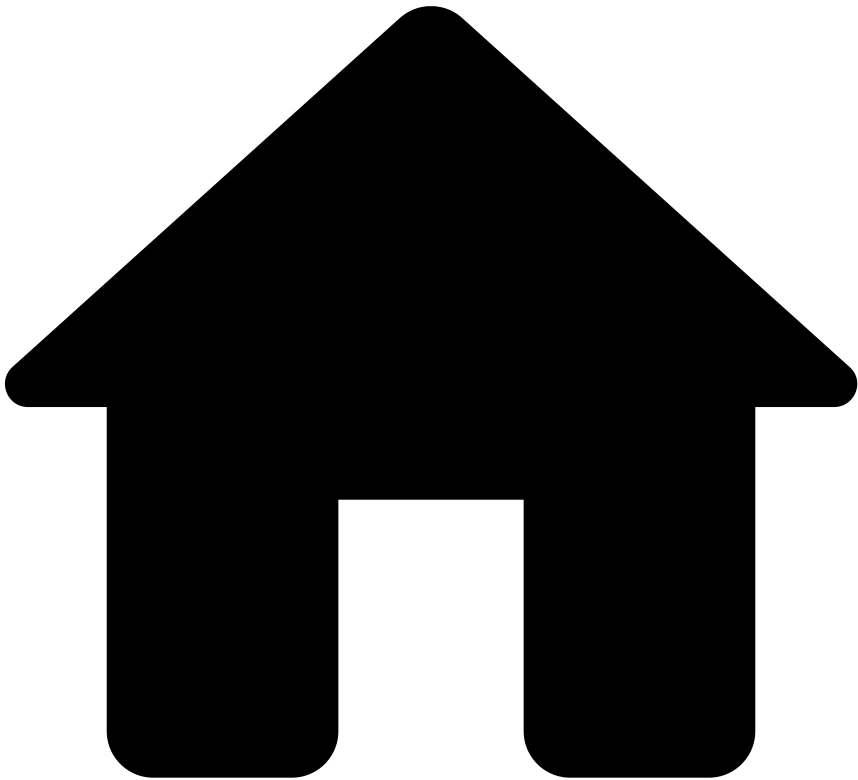

- [References](#)
- [Data Exporting Tool](#)
- Event Storage
- Event Storage - Transfers

Event Storage - Transfers

Was this page helpful?

The **Event Storage - Transfers** entity stores transfer related events, such as transfer initiations, information and settlements.

A new record becomes available for this entity for every transfer processed by the risk engine.



Name	Type	Description	Example
receiver_accoun t_limits	array<row>	The receiver account limits.	
	string		

Name	Type	Description	Example
account_event_type		The type of events associated with this limit.	
account_day_amount	bigint	Total amount on the account day period	123
account_daily_amount	bigint	Total daily amount	100
account_night_amount	bigint	Total amount on the account night period	123
account_single_day_amount	bigint	Single transaction amount limit on the day period.	333
account_single_night_amount	bigint	Single transaction amount limit on the night period.	222
account_start_day_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
account_start_night_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
sender_account_limits	array<row>	The sender account limits.	
event_type	string	The type of events associated with this limit.	
day_amount	bigint	Total amount on the account day period	123
daily_amount	bigint	Total daily amount	100
night_amount	bigint	Total amount on the account night period	123
single_day_amount	bigint	Single transaction amount limit on the day period.	333
single_night_amount	bigint	Single transaction amount limit on the night period.	222
start_day_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
start_night_hour	bigint	Used to compare the event date and the period transaction limit specified for the client.	
external_fraud_service	row	External fraud service score.	
external_score	string		

Name	Type	Description	Example
external_score_reason	string		
external_score_recommendation	string		
sender_fraud_date	bigint		
sender_fraud_involvement	string		
sender_fraud_reason_code	string		
sender_fraud_reason_desc	string		
sender_fraud_source	string		
sender_fraud_channel	string		
sender_fraud_product	string		
sender_fraud_flag	boolean		
receiver_fraud_date	bigint		
receiver_fraud_involvement	string		
receiver_fraud_reason_code	string		
receiver_fraud_reason_desc	string		
	string		

Name	Type	Description	Example
ââââ receiver_fraud_source			
ââââ receiver_fraud_channel	string		
ââââ receiver_fraud_product	string		
ââââ receiver_fraud_flag	boolean		
rules_explanations	string	Explanation of rules triggered in text format.	Rule X triggered because X amount surpasses the Y limit.
rules_ids	string	Identifier of the rules.	
uuid	string	UUID.	2bf75ff1-0b6f-48fd-bdf2-cf458243eaf2
direction	string	Payment direction flow. Possible values are incoming (or outgoing in legacy systems)	incoming
decision	string	Output decision from the system.	approve
action_names	string		
fdz_partition_index	integer	Partition index.	79
fdz_tenant_key	string	Tenant key from Feedzai perspective.	sample_value
fdz_timestamp	bigint	Unix timestamp.	1756463007000
fdz_uuid	string	UUID from Feedzai perspective.	d392378a-f4b2-49b5-8814-e3ea65543420
is_alert	string	Identifies whether the event is an alert.	True
approval_current_number	integer	Number of current approvals. Approval information	
approval_final_approval	boolean	Identifies whether the final approval has been reached so that the transfer can continue according with its life cycle. Approval information	
approval_primary_admin	boolean	Identifies whether the transaction contains the approval of the primary administrator or not. Approval information	
approval_signatures_applied	integer	Number of physical signatures applied to this transaction. Approval information	
approval_status	string	Approval status of the transaction. The values of this field depend on the approval_type field. Approval information	pending
approval_submitted_at	integer	Date at which the approval was submitted (in milliseconds since the Unix epoch). Approval information	

Name	Type	Description	Example
approval_total_approves	integer	Total number of necessary approvals for the payment to be completed. Approval information	
approval_type	string	Each institution might have a different combination of approvals and an associated nomenclature. This field enables the institutions to explicitly qualify the group of approvals present on this transaction. Approval information	type 1
approver_customer_id	string	Unique customer ID. Approver information	29298w9askajakjsk
approver_login_id	string	Customer internet banking ID. Approver information	2l209wms209029w
approver_type	string	Each institution might have a different combination of approvals and an associated nomenclature. This field enables the institutions to explicitly qualify the group of approvals present on this transaction. This field is related to approval_type and approval_status fields. Approver information	type 1
auth_type	string	Authentication option used by the consumer during the payment process. Transfer information	fingerprint
bulk_id	string	Unique reference ID that refers to the bulk transaction. This can be used by banks for internal control. Transfer information	b398a9e1-3900-4753-ad45-8310ea583724
challenge_risk_flag	boolean	Identifies whether the transfer has an authentication challenge or not. Authentication information	
challenge_risk_score	integer	Quantifies the risk associated with automatic challenges sent to the clients to allow authentication. Authentication information	
channel_type	string	Channel through which the transaction occurred. For example, possible values are branch, telephone, atm, online/web, mobile and other. Transfer information	branch
created_at	integer	Timestamp corresponding to the moment when the payment is created (in milliseconds since the Unix epoch). Note that the payment can be created, saved and then sent later. Transfer information	
cutoff_at	integer	Specified cut-off date and time for the payment consent (in milliseconds since the Unix epoch). Transfer information	
dd_mandate_name	string	The name of the direct debit mandate initiator. Transfer information	Mandate name
dd_mandate_number	string	The direct debit mandate identification number. Transfer information	Mandate number 123
	string	The device Android ID	723dc71eec6ccb31

Name	Type	Description	Example
device_android_id			
device_app_version	string	App version of the device. This field is only requested if the transfer is originated from a mobile app. Device information	2.10.1
device_browser	string	The browser used by the device	Chrome
device_browser_language	string	The device browser language	es-ES
device_browser_no_tracking	boolean	Whether the device browser has no tracking enabled	
device_browser_private_mode	boolean	Whether the device browser has private mode enabled	
device_browser_version	string	The browser version this device is using	89.0.4389.72
device_cbf	string	The device CBF	723dc71eec6ccb31
device_cookies	boolean	Whether the cookies are enabled on the web browser. Sending this information is optional because it's not always available to the Feedzai's client. Device information	
device_fingerprint	string	Information collected about the software and hardware of the device used to perform the transaction. Could be encrypted information used for device enrichment. Feedzai	0400YbjucgPeDpqN9ZBLUITS+9VZ4/+YT+qYutCN/R8/6uxqb6W7w==
device_first_seen	integer	Timestamp corresponding to the first time the device is used for the transaction (in milliseconds since the Unix epoch). Device information	
device_id	string	Unique identifier of the device. Device information	d5e8c80119a87f4c
device_imei_number	string	International Mobile Equipment Identity (IMEI). This field is only requested if the transfer is originated from a mobile device. Device information	447292738273482
device_ip_address	string	IP address of the device used to conduct the transaction. Device information	219.6.112.233
device_ip_address_location	string	Address location derived from the device's IP address. Device information	Manchester
device_ip_country_code	string	The country code derived from the device's IP (in accordance with ISO 3166, Alpha-2). Transfer information	US
device_ip_region	string	The device IP's region	CA
device_is_new	boolean	Whether the device has never been seen before.	
device_isp	string	The Internet Service Provider used by the device	Verizon

Name	Type	Description	Example
device_language	string	Device language code. Transfer information	US
device_latitude	string	Geographic latitude of the device where the transfer originated. Device information	53.48
device_longitude	string	Geographic longitude of the device where the transfer originated. Device information	-2.24
device_mac_address	string	The device Mac Address	20:f4:78:dd:33:9b
device_model	string	The end user's device model name (empty for desktop)	iPhone6
device_network_type	string	The device network type	STD
device_operating_system	string	'Device"s operating system. Examples include: MacOS , Windows 10 , Linux . Device information'	MacOS
device_os_version	string	The device's operating system version	10.10.3
device_registration_date	integer	Device registration's timestamp (in milliseconds since the Unix epoch)	
device_screen_height	integer	The device screen's total height in pixels	
device_screen_width	integer	The device screen's total width in pixels	
device_serial_id	string	The device serial ID	12345678
device_session_duration	integer	The device session duration in milliseconds	
device_tor_mode	boolean	Whether the request is coming from a TOR enabled network. Sending this information is optional because it's not always available to the Feedzai's client. Device information	
device_type	string	'Examples include: Android , IOS , Windows Mobile . Device information'	android
device_user_agent	string	The user agent string from the browser used to initiate the transfer. This field is only requested if the transfer is originated from a web browser. Device information	Mozilla/5.0 (Linux; Android 8.0.0; SM-G960F Build/R16NW) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/62.0.3202.84 Mobile Safari/537.36
dispute_end_date	integer	Timestamp corresponding to the moment when the dispute was closed (in milliseconds since the Unix epoch). Transfer information	
dispute_feedback_notes	string	Contextual information associated with the dispute communication. Transfer information	The account holder opened a dispute about a recent transaction.
dispute_notes	string		The device information seems suspicious.

Name	Type	Description	Example
		Contextual information left by the analyst at the time of the dispute opening. Transfer information	
dispute_reason	string	Why the dispute was opened. Transfer information	The payroll shows an unauthorized transaction.
dispute_refunded	string	'Whether the funds were refunded to the cardholder. Possible values: no_refund , partial_refund , total_refund . Transfer information'	partial_refund
dispute_start_date	integer	Timestamp that corresponds to the time when the dispute was opened (in milliseconds since the Unix epoch). Transfer information	
dispute_submitted_by	string	Who submitted the dispute. Transfer information	Joe Dow
end_to_end_identification	string	Unique reference to unambiguously refer to the payment transaction across systems. This can be used by banks for internal control. Transfer information	a2d311ac-c9c3-4ea7-9537-1db8dea0534c
event_external_id	string	Unique identifier on the client's side, typically used for the client to cross-reference it back into their own systems. For example, you can copy this field from Case Manager and look for it in another CRM used by your organization. Transfer information	4048611b295e993d1b561d9030c53424bbf2b95e
event_occurred_at	integer	Timestamp corresponding to the moment when the current event occurred (in milliseconds since the Unix epoch).	
execution_at	integer	Timestamp corresponding to the moment when the payment is settled (in milliseconds since the Unix epoch). This can be in the past or in the future. Transfer information	
fake_location	string	Includes information when the geolocation is fake	Geolocation is fake
feedback_type	string	'Identifies the different types of feedback. Possible values: out_of_band and for conclusions of out-of-band communication and chargeback for closing disputes. Note that, in TFB, for the feedback endpoint, if feedback_type , if equals out_of_band , the required fields are oob_response_type , oob_end_date, and oob_feedback_notes`. Transfer information'	out_of_band
feedback_value	boolean	This field only applies to the Feedback endpoint. The value that should be associated with the feedback_label . E.g. if the label is fraud , the value true labels the transaction as fraudulent and the value false labels as non-fraudulent. Transfer information	

Name	Type	Description	Example
<code>first_recurring_payment</code>	boolean	Whether the payment is the first occurrence of a series of recurring payments with the same amount and with the same payee. Transfer information	
<code>frequency</code>	string	Recurrent scheduled transfer. Expected values include <code>weekly</code> , <code>each 15 days</code> , <code>monthly</code> , <code>quarter</code> , <code>bi-annual</code> , <code>annual</code> and <code>every two years</code> . Transfer information	<code>weekly</code>
<code>geographic_scope</code>	string	'Possible values are: <code>domestic</code> - Between the same country and the same currency. <code>one_leg_out</code> - Between the same country and different currency. <code>cross_border</code> - Between different countries and different currencies. Transfer information'	<code>domestic</code>
<code>info_type</code>	string	'Indicates the type of the info event. Possible values: <code>dispute</code> , <code>out_of_band</code> , <code>pre_decided</code> , <code>not_honor</code> and <code>additional_info</code> . Note that, in TFB, for the info endpoint, if <code>info_type</code> equals <code>out_of_band</code> , the required fields are <code>oob_comm_type</code> and <code>oob_start_date</code> . Transfer information'	<code>out_of_band</code>
<code>instant_transfer_processing_method</code>	string	Method used to process the instant transfer between the sender and the receiver as defined by their profiles both in the instant transfer and in the initiation payment methods (e.g. App vs Home banking). Possible values are <code>account_to_account</code> , <code>account_to_card</code> , <code>card_to_account</code> and <code>card_to_card</code> . Transfer information	<code>account_to_account</code>
<code>instant_transfer_type</code>	string	Type of instant transfer. Possible values are <code>purchase</code> , <code>purchase_with_change</code> , <code>withdrawal</code> . Transfer information	<code>purchase</code>
<code>is_domestic</code>	boolean	Indicates if the current transaction is domestic.	
<code>last_sca_at</code>	integer	Timestamp, in milliseconds since the Unix epoch, corresponding to the last time that the customer performed Strong Customer Authentication (SCA) when SCA is enabled (mandatory within the European Union; optional outside the EU). Transfer information	
<code>lifecycle_id</code>	string	Identifier of the transfer sent to Feedzai. Each new Info or Settlement request share the same life cycle ID as the original transfer. Transfer information	<code>1df7a7qg78vd7fs</code>
<code>login_session_id</code>	string	Deprecated - Use 'session_id' instead.	<code>fb2e77d</code>
<code>malware_flag</code>	boolean		

Name	Type	Description	Example
		Indicates whether the device is infected with malware. Transfer information	
max_number_of_authentications	integer	Number of max attempts authentications allowed for this client. Authentication information	
network_bssid	string	'Basic Server Set Identifier '	router
network_ssid	string	Service Set Identifier - the wifi network name	network_name
number_of_authentications	integer	Number of attempts to authenticate. Authentication information	
number_of_payments	integer	Specifies the number of payments from the same order. Transfer information	
oob_comm_type	string	'The type of communication made with the client. Possible values: sms , call , email . Transfer information'	sms
oob_end_date	integer	Timestamp corresponding to the moment when the client responded to the out-of-band communication (in milliseconds since the Unix epoch). Transfer information	
oob_feedback_notes	string	Contextual information associated with the out-of-band communication. Transfer information	The account holder denied the authenticity of the transaction.
oob_notes	string	Notes related to the out of band communication. Transfer information	The customer has been already called.
oob_response_type	string	'The type of out-of-band response made by the client. Possible values: call , sms , email , branch . Note that this field is required if the feedback_type field has the value out_of_band Transfer information'	call
oob_start_date	integer	Timestamp that corresponds to the moment when the client was contacted (in milliseconds since the Unix epoch). Transfer information	
pass_reset	boolean	If a password reset has been recently initiated by the sender. Authentication information	
payment_reference	string	Unique reference to unambiguously refer to the payment transaction. This can be used by banks for internal control. Transfer information	bb3fd51c-049e-4bfb-8a22-36e6143da4a8
payment_status	string	'Life cycle status of the transfer. The following stage status may occur with the associated values: 1st stage status - entered , approval pending , bank received . 2nd stage status - processing , accepted , rejected , return , recall , request for recall , waiting for recall , recall accepted , recall rejected . Transfer information'	entered

Name	Type	Description	Example
payment_sub_type	string	Specific service inside each payment type. Possible values are instant_transfer, direct_debit, direct_deposit, credit_transfer, internal_transfer and bill_payment. Transfer information	instant_transfer
payment_type	string	Payment type. Possible values are sepa, bacs, chaps, wire, swift, ach, fps, npp, bpay, pix, boleto, zelle, emt, rtp_tch, ted, tef, doc, internal, and other. Transfer information	sepa
product_code	string	The code of the product offered by the bank that was used to initiate the transfer. Transfer information	68002
proxy_flag	boolean	Whether the device IP is a proxy. Transfer information	
purchased_amount	integer	Purchase amount in cents (e.g. 1000 represents \$10.00). Transfer information	
receiver_account_atc1	string	Describes the account type affected for debits and inquiries and the "from" account for transfers. Receiver's account	atc1
receiver_account_atc2	string	Describes the account type affected for credits and the "to" account for transfers. Receiver's account	atc2
receiver_account_available_credit	integer	Available credit within the credit limit provided by the bank (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver's account	
receiver_account_balance	integer	Current account balance of the person receiving the request (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver's account	
receiver_account_bic	string	Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code. Receiver's account	PTCDG
receiver_account_cash_advance_balance	integer	Debt amount in an account due to cash advance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver's account	
receiver_account_credit_limit	integer	Account credit limit (in cents or equivalent). Not relevant for debit. For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	
receiver_account_currency	string	Currency associated to the receiver's account (in accordance with ISO 4217, Alpha-3). Receiver's account	GBP
	integer	Account's debt balance (in cents or equivalent). For example, 1000 to	

Name	Type	Description	Example
receiver_account_debt_balance		represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver's account	
receiver_account_debt_payment_method	string	Payment method of outstanding balance on the account. Receiver's account	card
receiver_account_fraud_30d	integer	Number of account's confirmed frauds on the last 30 days	
receiver_account_fraud_3d	integer	Number of account's confirmed frauds on the last 3 days	
receiver_account_fraud_6m	integer	Number of account's confirmed fraudson the last 6 months	
receiver_account_iban	string	International Bank Account Number (IBAN) in ISO 13616:2020 format or any bank account unique identifier. This field should be sent as a token or hash. Receiver's account	PT50 1234 5678 90
receiver_account_id	string	Banking App account id. This field should be sent as a token or hash. Receiver's account	26574591-19c5-4ad6-9d22-e966cbcf2df7
receiver_account_last_activity	integer	Identifies the timestamp of the last activity registered at the account (in milliseconds since the Unix epoch). Receiver's account	
receiver_account_last_payment_amount	integer	Amount of the last payment made on the account (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver's account	
receiver_account_last_payment_date	integer	Date when the receiver pays off the balance on the account (in milliseconds since the Unix epoch). Receiver's account	
receiver_account_number_of_cards	integer	Number of cards associated with the account. Receiver's account	
receiver_account_open_date	integer	Opening date of the account (in milliseconds since the Unix epoch). Receiver's account	
receiver_account_otb_limit	integer	Account open to buy limit is the available amount between the account balance and unused credit limit (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver's account	
receiver_account_pw_change_flag	boolean	Whether the receiver changed the password on the account. Receiver's account	
receiver_account_rejected_30d	integer	Number of account's rejected transactions on the last 30 days	
	integer		

Name	Type	Description	Example
receiver_account_rejected_3d		Number of account's rejected transactions on the last 3 days	
receiver_account_rejected_6m	integer	Number of account's rejected transactions on the last 6 months	
receiver_account_rep_fraud_30d	integer	Number of account's reported frauds on the last 30 days	
receiver_account_rep_fraud_3d	integer	Number of account's reported frauds on the last 3 days	
receiver_account_rep_fraud_6m	integer	Number of account's reported frauds on the last 6 months	
receiver_account_rewards_used_count	integer	The number of times that the receiver used the rewards. Receiver's account	
receiver_account_settle_30d	integer	Number of account's settlements on the last 30 days	
receiver_account_settle_3d	integer	Number of account's settlements on the last 3 days	
receiver_account_settle_6m	integer	Number of account's settlements on the last 6 months	
receiver_account_status	string	'Status of the account. Possible values: open , blocked , closed , waiting_for_kyc . Receiver's account'	open
receiver_account_type	string	Type of the account. For example, savings or main account. Receiver's account	credit
receiver_alias	string	Receiver's alias value. This field only applies when the payment is made with an alias, such as using email or phone number as the key to transfer the funds. An alias is mostly used in instant payments, such as PayPal or Venmo. Receiver general information	
receiver_alias_dict_reg_date	integer	Date of registry on DICT (Diretório de Identificadores de Contas Transacionais)	
receiver_alias_fraud_30d	integer	Number of alias' confirmed frauds on the last 30 days	
receiver_alias_fraud_3d	integer	Number of alias' confirmed frauds on the last 3 days	
receiver_alias_fraud_6m	integer	Number of alias' confirmed frauds on the last 6 months	
receiver_alias_last_update_time	integer	Identifies the timestamp of the date the receiver's alias is updated (in milliseconds since the Unix epoch). Receiver general information	
	integer		

Name	Type	Description	Example
receiver_alias_portab_date		Start date of the portability or ownership claim process	
receiver_alias_registration_time	integer	Identifies the timestamp of the date the receiver's alias is registered (in milliseconds since the Unix epoch). Receiver general information	
receiver_alias_rejected_30d	integer	Number of alias' rejected transactions on the last 30 days	
receiver_alias_rejected_3d	integer	Number of alias' rejected transactions on the last 3 days	
receiver_alias_rejected_6m	integer	Number of alias' rejected transactions on the last 6 months	
receiver_alias_rep_fraud_30d	integer	Number of alias' reported frauds on the last 30 days	
receiver_alias_rep_fraud_3d	integer	Number of alias' reported frauds on the last 3 days	
receiver_alias_rep_fraud_6m	integer	Number of alias' reported frauds on the last 6 months	
receiver_alias_settle_30d	integer	Number of alias' settlements on the last 30 days	
receiver_alias_settle_3d	integer	Number of alias' settlements on the last 3 days	
receiver_alias_settle_6m	integer	Number of alias' settlements on the last 6 months	
receiver_alias_status	string	The status of the receiver's alias. The possible values are active and deleted . Receiver general information	active
receiver_alias_type	string	Receiver's alias type. This field only applies when the payment is made with an alias. Receiver general information	email
receiver_bank_address	string	Address of the receiver's bank. Receiver's bank	Newton Avenue 77
receiver_bank_bic	string	Bank Identifier Code (BIC) in SWIFT format. Receiver's bank	HBUKGB4BXXX
receiver_bank_branch_id	string	Account bank branch id. Receiver's bank	12-20-99
receiver_bank_city	string	City in which the receiver's bank is located. Receiver's bank	Manchester
receiver_bank_country_code	string	The country code of where the receiver's bank is based (in accordance with ISO 3166, Alpha-2). Receiver's bank	US
receiver_bank_currency	string	Currency of the receiver's bank (in accordance with ISO 4217, Alpha-3). Receiver's bank	GBP
receiver_bank_fee_amount	integer	Fee that is applied to the receiver's bank included in the sender_transaction	

Name	Type	Description	Example
		n_amount field, in cents (e.g. 1000 to represent \$10.00). Receiver's bank	
receiver_bank_fee_currency	string	Defines the currency of the receiver_bank_fee_amount field (in accordance with ISO 4217, Alpha-3). Receiver's bank	GBP
receiver_bank_fee_type	string	'Defines the method that is used to handle the payment charges or payment fees. Expected values include: - OUR : The sender of the payment will bear all of the payment transaction fees. The recipient of the payment will not pay any payment fees. - SHA (SHARed): The sender of the payment will pay all fees charged by the sending bank. The recipient of the payment will pay all fees charged by the receiving bank. - BEN (BENeficiary): The recipient of the payment will incur all of the payment transaction fees. The sender of the payment will not pay any payment fees. NOTE: Fees can happen at any stage of the transaction, it will depend on the Bilateral or multilateral agreements. Receiver's bank'	SHA
receiver_bank_foreign_exchange_rate	double	Foreign exchange rate, defined by the sender and receiver currencies. Receiver's bank	
receiver_bank_name	string	Name of the receiver's bank. Receiver's bank	Receiver Bank
receiver_bank_postal_code	string	Postal code of the receiver's bank. Receiver's bank	WC7N 7EW
receiver_bank_routing_number	string	Account bank routing number. Receiver's bank	201-192-111
receiver_bank_sort_code	string	Account bank sort code. Receiver's bank	09-01-31
receiver_citizen_id_number	string	Identification number defined in the citizen identity document associated with the receiver's home country. Receiver general information	12345678901234
receiver_city	string	Receiver's city. Receiver general information	Manchester
receiver_company_id	string	Receiver company ID. Receiver general information	852814c8-a24f-4269-a566-a1d10364b3cb
receiver_correspondent_bank_address	string	Bank address. Receiver correspondent's bank	River Street 54
receiver_correspondent_bank_bic	string	Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code. Receiver correspondent's bank	0ed7c577-b503-448a-95c8-b92342e0051e
receiver_correspondent_bank_city	string	City in which the bank is located. Receiver correspondent's bank	London

Name	Type	Description	Example
receiver_correspondent_bank_country_code	string	The country code of the correspondent's bank (in accordance with ISO 3166, Alpha-2). Receiver correspondent's bank	US
receiver_correspondent_bank_currency	string	Currency used by the Bank (in accordance with ISO 4217, Alpha-3). Receiver correspondent's bank	GBP
receiver_correspondent_bank_fee_amount	integer	Fee that is applied to the sender's bank included in the sender_transaction_amount field, in cents (e.g. 1000 to represent \$10.00). Receiver correspondent's bank	
receiver_correspondent_bank_fee_currency	string	Defines the currency of the fee_amount field (in accordance with ISO 4217, Alpha-3). Receiver correspondent's bank	GBP
receiver_correspondent_bank_fee_type	string	'Defines the method that is used to handle the payment charges or payment fees. Expected values include: - OUR : The sender of the payment will bear all of the payment transaction fees. The recipient of the payment will not pay any payment fees. - SHA (SHAred): The sender of the payment will pay all fees charged by the sending bank. The recipient of the payment will pay all fees charged by the receiving bank. - BEN (BENeficiary): The recipient of the payment will incur all of the payment transaction fees. The sender of the payment will not pay any payment fees. NOTE: Fees can happen at any stage of the transaction, it will depend on the Bilateral or multilateral agreements. Receiver correspondent's bank'	SHA
receiver_correspondent_bank_foreign_exchange_rate	double	Foreign exchange rate defined by the sender and receiver currencies. Receiver correspondent's bank	
receiver_correspondent_bank_name	string	Bank name. Receiver correspondent's bank	Receiver's Correspondent Bank SA
receiver_correspondent_bank_postal_code	string	Postal code of the bank. Receiver correspondent's bank	AWB3 7Y3
receiver_country_code	string	The country code of the receiver / beneficiary (in accordance with ISO 3166, Alpha-2). Receiver general information	US
receiver_currency	string	Currency associated to the receiver. Refers to receivers' total balance and credit limit. Receiver general information	GBP
receiver_dob	string	Receiver's date of birth (YYYYMMDD). Receiver general information	19900101
	string		1234567

Name	Type	Description	Example
receiver_driver_license		Receiver driver's license. Receiver general information	
receiver_email	string	Receiver's main email contact. Receiver general information	
receiver_fraud_30d	integer	Number of customer's confirmed frauds on the last 30 days	
receiver_fraud_3d	integer	Number of customer's confirmed frauds on the last 3 days	
receiver_fraud_6m	integer	Number of customer's confirmed fraudson the last 6 months	
receiver_id	string	Receiver ID generated by the receiver's bank. Receiver general information	ADG13421
receiver_kyc_lvl	string	Know your receiver (KYC) level. Receiver general information	A
receiver_name	string	The name of the individual receiving the payment. Receiver general information	John Smith
receiver_number_of_accounts	integer	Number of accounts associated with the receiver. Receiver general information	
receiver_number_of_cards	integer	Number of cards associated with the receiver. Receiver general information	
receiver_occupation	string	Receiver's main professional activity. Receiver general information	engineer
receiver_occupation_status	string	Receiver's current occupation status. Receiver general information	employee
receiver_passport_number	string	Receiver passport number. Receiver general information	PT-019796bb-783c-4020-8110-780e2900515b
receiver_phone	string	Receiver's main telephone contact. Receiver general information	001122334455
receiver_phone_val_code	string	Indicates whether the receiver phone number is valid. Receiver general information	001122
receiver_region	string	Receiver's region. Receiver general information	Noth West
receiver_registration_date	integer	Receiver registration date (in milliseconds since the Unix epoch). Receiver general information	
receiver_rejected_30d	integer	Number of customer's rejected transactions on the last 30 days	
receiver_rejected_3d	integer	Number of customer's rejected transactions on the last 3 days	
receiver_rejected_6m	integer	Number of customer's rejected transactions on the last 6 months	
receiver_reported_fraud_30d	integer	Number of customer's reported frauds on the last 30 days	
receiver_reported_fraud_3d	integer	Number of customer's reported frauds on the last 3 days	
receiver_reported_fraud_6m	integer	Number of customer's reported fraudson the last 6 months	

Name	Type	Description	Example
<code>receiver_risk_rating</code>	string	Receiver's risk rating. Receiver general information	B
<code>receiver_segment</code>	string	Receiver's segment within the banks' segmentation. Receiver general information	retail
<code>receiver_settlement_30d</code>	integer	Number of customer's settlements on the last 30 days	
<code>receiver_settlement_3d</code>	integer	Number of customer's settlements on the last 3 days	
<code>receiver_settlement_6m</code>	integer	Number of customer's settlements on the last 6 months	
<code>receiver_settlement_at</code>	integer	States the settlement date for the transfer (in milliseconds since the Unix epoch). Receiver general information	
<code>receiver_ssn</code>	string	Receiver social security number. Receiver general information	123456789
<code>receiver_street_addr</code>	string	The address of the individual receiving the payment. Receiver general information	Lincoln Avenue 77
<code>receiver_tax_number</code>	string	Receiver tax number. Receiver general information	987654321
<code>receiver_total_balance</code>	integer	Sum of the balances on all receiver's accounts (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver general information	
<code>receiver_total_credit_limit</code>	integer	Sum of the credit limit on all receiver's accounts (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Receiver general information	
<code>receiver_transaction_amount</code>	integer	Transaction amount received by the receiver. Receiver transaction information	
<code>receiver_transaction_bank_account_number</code>	string	The bank account number of the receiver. Receiver transaction information	9a08f316-df1f-4096-9a2d-a904a82bb65e
<code>receiver_transaction_currency</code>	string	Defines the currency of the <code>receiver_transaction_amount</code> field (in accordance with ISO 4217, Alpha-3). Receiver transaction information	GBP
<code>receiver_transaction_fee_amount</code>	integer	Fee that is applied to the sender's bank included in the <code>sender_transaction_amount</code> field, in cents (e.g. 1000 to represent \$10.00). Receiver transaction information	
<code>receiver_transaction_fee_currency</code>	string	Defines the currency of the <code>receiver_bank_fee_currency</code> field (in accordance with ISO 4217, Alpha-3). Receiver transaction information	GBP

Name	Type	Description	Example
receiver_transaction_fee_type	string	'Defines the method that is used to handle the payment charges or payment fees. Expected values include: - OUR : The sender of the payment will bear all of the payment transaction fees. The recipient of the payment will not pay any payment fees. - SHA (SHARed): The sender of the payment will pay all fees charged by the sending bank. The recipient of the payment will pay all fees charged by the receiving bank. - BEN (BENeficiary): The recipient of the payment will incur all of the payment transaction fees. The sender of the payment will not pay any payment fees. NOTE: Fees can happen at any stage of the transaction, it will depend on the Bilateral or multilateral agreements. Receiver transaction information'	SHA
receiver_transaction_foreign_exchange_rate	double	Foreign exchange rate, defined by the sender and receiver currencies. Receiver transaction information	
receiver_transaction_notes	string	Notes added by the receiver. Receiver transaction information	The receiver notes.
receiver_transaction_original_amount	integer	Transaction amount on the receiver's end. This amount is in the receiver's account currency in cents (e.g. 1000 represents \$10.00), and includes fees. Receiver transaction information	
receiver_transaction_original_currency	string	Defines the currency of the receiver_transaction_original_amount field (in accordance with ISO 4217, Alpha-3). Receiver transaction information	GBP
receiver_zip	string	Receiver's postal code. Receiver general information	WC7N 7EW
recurring_payment	boolean	Whether the payment is part of a series of recurring payments with the same amount and with the same payee. Transfer information	
recurring_payment_day	integer	'Defines the concrete date of the recurring payment. For example: true the 15th day of each month, or on the on the 1st day of each month (i.e. value 15 or 1 in this example). Transfer information'	
recurring_payment_hour	integer	Defines the hour of the expected recurring day to initiate a transfer. Transfer information	
reference_fraud_rate	double	Fraud rate for transfers. Calculated as the total value of unauthorized or fraudulent remote transfers, divided by the total value of all remote transfers, in the previous calendar quarter (i.e. three-month window). Transfer information	

Name	Type	Description	Example
reference_number	string	Numeric representation of payment ID. Transfer information	Boleto ID
reference_number_entry_mode	string	The entry mode of the payment ID. Possible values are manual , barcode and qr_code . Transfer information	manual
requested_execution_at	integer	Date at which the initiating party requests the settlement agent to process the payment. The sender in this field will be able to specify the expected due date (in milliseconds since the Unix epoch). Transfer information	
sca_risk_flag	boolean	Identifies whether the transfer has strong customer authentication (SCA) or not. Authentication information	
sca_risk_score	integer	Quantifies the risk associated with automatic strong customer authentication (SCA) sent to the clients to allow authentication. Authentication information	
segment_channel_type	string	Specifies the transaction payment channel. Supported values are retail_banking , business_banking , commercial_banking , treasury , and cash_management . Transfer information	retail_banking
sender_account_atc1	string	Describes the account type affected for debits and inquiries and the "from" account for transfers. Sender's account	atc1
sender_account_atc2	string	Describes the account type affected for credits and the "to" account for transfers. Sender's account	atc2
sender_account_available_credit	integer	Available credit within the credit limit provided by the bank (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	
sender_account_balance	integer	Current account balance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	
sender_account_bic	string	Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code. Sender's account	NWBK
sender_account_cash_advance_balance	integer	Debt amount in an account due to cash advance (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	
sender_account_credit_limit	integer	Account credit limit (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	

Name	Type	Description	Example
sender_account_currency	string	Currency associated to the sender's account (in accordance with ISO 4217, Alpha-3). Sender's account	GBP
sender_account_debt_balance	integer	Account's debt balance (in cents or equivalent). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	
sender_account_debt_payment_method	string	Payment method of outstanding balance on the account. Sender's account	card
sender_account_iban	string	International Bank Account Number (IBAN) in ISO 13616:2020 format or any bank account unique identifier. This field should be sent as a token or hash. Sender's account	GB98 MIDL 0700 9312 3456 78
sender_account_id	string	Banking App account id. This field should be sent as a token or hash. Sender's account	6edd8107-f24f-4bdd-ba86-4baf21f27c1b
sender_account_last_activity	integer	Identifies the timestamp of the last activity registered at the account (in milliseconds since the Unix epoch). Sender's account	
sender_account_last_payment_amount	integer	Amount of the last payment made on the account (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	
sender_account_last_payment_date	integer	Date when the sender pays off the balance on the account (in milliseconds since the Unix epoch). Sender's account	
sender_account_number_of_cards	integer	Number of cards associated with the account. Sender's account	
sender_account_open_date	integer	Opening date of the account (in milliseconds since the Unix epoch). Sender's account	
sender_account_otb_limit	integer	Account open to buy limit is the available amount between the account balance and unused credit limit (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender's account	
sender_account_pw_change_flag	boolean	For deployments that do not include Digital Activity, you can use this field to detect if the customer changed the password on the account. This refers to if the password is changed over the last day or within a single session. Sender's account	
sender_account_rewards_used_count	integer	The number of times that the sender used the rewards. Sender's account	

Name	Type	Description	Example
sender_account_status	string	'Status of the account. Possible values: open , blocked , closed , waiting_for_kyc . Sender's account'	open
sender_account_type	string	Type of the account. For example, savings or main account. Sender's account	credit
sender_alias	string	Sender's alias value. This field only applies when the payment is made with an alias, such as using email or phone number as the key to transfer the funds. An alias is mostly used in instant payments, such as PayPal or Venmo. Sender general information	
sender_alias_last_update_time	integer	Identifies the timestamp of the date the sender's alias is updated (in milliseconds since the Unix epoch). Sender general information	
sender_alias_registration_time	integer	Identifies the timestamp of the date the sender's alias is registered (in milliseconds since the Unix epoch). Sender general information	
sender_alias_status	string	The status of the sender's alias. The possible values are active and deleted . Sender general information	active
sender_alias_type	string	Sender's alias type. This field only applies when the payment is made with an alias. Sender general information	email
sender_bank_address	string	Sender's bank address. Sender's bank	Diagon Alley 33
sender_bank_bic	string	Bank Identifier Code (BIC) in SWIFT format. Sender's bank	HBUKGB4BXXX
sender_bank_branch_id	string	Account bank branch id. Sender's bank	77-71-13
sender_bank_city	string	Sender's bank city. Sender's bank	London
sender_bank_country_code	string	The country code of where the sender's bank is based (in accordance with ISO 3166, Alpha-2). Sender's bank	UK
sender_bank_currency	string	Sender's bank currency (in accordance with ISO 4217, Alpha-3). Sender's bank	GBP
sender_bank_fee_amount	integer	Fee that is applied to the sender's bank included in the sender_transaction_amount field, in cents (e.g. 1000 to represent \$10.00). Sender's bank	
sender_bank_fee_currency	string	Defines the currency of the sender_bank_fee_amount field (in accordance with ISO 4217, Alpha-3). Sender's bank	GBP
sender_bank_fee_type	string	'Defines the method that is used to handle the payment charges or payment fees. Expected values include: - OUR : The sender of the payment will bear all of the payment transaction fees. The recipient of the payment will not pay any	SHA

Name	Type	Description	Example
		payment fees. - SHA (SHAred): The sender of the payment will pay all fees charged by the sending bank. The recipient of the payment will pay all fees charged by the receiving bank. - BEN (BENeficiary): The recipient of the payment will incur all of the payment transaction fees. The sender of the payment will not pay any payment fees. NOTE: Fees can happen at any stage of the transaction, it will depend on the Bilateral or multilateral agreements. Sender's bank'	
sender_bank_foreign_exchange_rate	double	Foreign exchange rate, defined by the sender and receiving currency. Sender's bank	
sender_bank_name	string	Sender's bank name. Sender's bank	Gringotts
sender_bank_postal_code	string	Sender's bank postal code. Sender's bank	WC2N 5DU
sender_bank_routing_number	string	Account bank routing number. Sender's bank	192-211-329
sender_bank_sort_code	string	Account bank sort code. Sender's bank	09-01-31
sender_citizen_id_number	string	Identification number defined in the citizen identity document associated with the sender's home country. Sender general information	12345678901234
sender_city	string	Sender's city. Sender general information	Edinburgh
sender_company_id	string	Sender company ID. Sender general information	1af402d5-ea3b-4f81-acae-80934a325daf
sender_correspondent_bank_address	string	Bank address. Sender correspondent's bank	River Street 55
sender_correspondent_bank_bic	string	Bank Identifier Code (BIC) in SWIFT format or any other bank unique identifier code. Sender correspondent's bank	0ed7c577-b503-448a-95c8-b92342e0051e
sender_correspondent_bank_city	string	City in which the bank is located. Sender correspondent's bank	London
sender_correspondent_bank_country_code	string	The country code of the correspondent's bank (in accordance with ISO 3166, Alpha-2). Sender correspondent's bank	US
sender_correspondent_bank_currency	string	Currency used by the Bank (in accordance with ISO 4217, Alpha-3). Sender correspondent's bank	GBP
sender_correspondent_bank_fee_amount	integer	Fee that is applied to the sender's bank included in the sender_transaction_amount field, in cents (e.g. 1000 to represent \$10.00). Sender correspondent's bank	

Name	Type	Description	Example
sender_correspondent_bank_fee_currency	string	Defines the currency of the fee_amount field (in accordance with ISO 4217, Alpha-3). Sender correspondent's bank	GBP
sender_correspondent_bank_fee_type	string	'Defines the method that is used to handle the payment charges or payment fees. Expected values include: - OUR : The sender of the payment will bear all of the payment transaction fees. The recipient of the payment will not pay any payment fees. - SHA (SHARed): The sender of the payment will pay all fees charged by the sending bank. The recipient of the payment will pay all fees charged by the receiving bank. - BEN (BENeficiary): The recipient of the payment will incur all of the payment transaction fees. The sender of the payment will not pay any payment fees. NOTE: Fees can happen at any stage of the transaction, it will depend on the Bilateral or multilateral agreements. Sender correspondent's bank'	SHA
sender_correspondent_bank_foreign_exchange_rate	double	Foreign exchange rate defined by the sender and receiver currencies. Sender correspondent's bank	
sender_correspondent_bank_name	string	Bank name. Sender correspondent's bank	Correspondent Bank SA
sender_correspondent_bank_postal_code	string	Postal code of the bank. Sender correspondent's bank	YEB3 UD3
sender_country_code	string	The country code of the sender / originator (in accordance with ISO 3166, Alpha-2). Sender general information	US
sender_country_code_change_flag	boolean	Whether the sender is performing the first payment after changing country in their address. Transfer information	
sender_currency	string	Currency associated to the sender. Refers to senders' total balance and credit limit. Sender general information	GBP
sender_dob	string	Sender's date of birth (YYYYMMDD). Sender general information	19900101
sender_driver_license	string	Sender driver's license. Sender general information	1234567
sender_email	string	Sender's main email contact. Sender general information	
sender_email_change_flag	boolean	Whether the sender is performing the first payment after changing email. Transfer information	
sender_id	string	Sender ID generated by the sender's bank. Transfer information	MSG12345
sender_initiated_at	integer	Time at which the sender makes the transfer (in milliseconds since the Unix epoch). This happens after the payment	

Name	Type	Description	Example
		creation. Both events can happen in sync or independently. Transfer information	
sender_kyc_level	string	Know your sender (KYC) level. Sender general information	A
sender_name	string	The name of the individual sending the payment. Sender general information	Joe Dow
sender_number_of_accounts	integer	Number of accounts associated with the sender. Sender general information	
sender_number_of_cards	integer	Number of cards associated with the sender. Sender general information	
sender_occupation	string	Sender's main professional activity. Sender general information	actor
sender_occupation_status	string	Sender's current occupation status. Sender general information	employee
sender_passport_number	string	Sender passport number. Sender general information	PT-019796bb-783c-4020-8110-780e2900515b
sender_phone	string	Sender phone number. Sender general information	001122334455
sender_phone_change_flag	boolean	Whether the sender is performing the first payment after changing phone number. Transfer information	
sender_phone_val_code	string	Indicates whether the sender phone number is valid. Sender general information	001122
sender_region	string	Sender's region. Sender general information	Edinburgh
sender_registration_date	integer	Sender registration date (in milliseconds since the Unix epoch). Sender general information	
sender_risk_rating	string	Sender's risk rating. Sender general information	B
sender_segment	string	Sender's segment within the banks' segmentation. Transfer information	retail
sender_ssn	string	Sender social security number. Sender general information	123456789
sender_street_addr	string	The address of the individual sending the payment. Sender general information	94 Morningside Rd, Edinburgh, EH10 4BY
sender_tax_number	string	Sender tax number. Sender general information	987654321
sender_total_balance	integer	Sum of the balances on all sender's accounts (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender general information	
sender_total_credit_limit	integer	Sum of the credit limit on all sender's accounts (in cents). For example, 1000 to represent \$10.00 (assuming the US dollar currency, and a currency unit of 2). Sender general information	

Name	Type	Description	Example
sender_transaction_amount	integer	Amount of the transaction performed by the sender. This amount is in the sender's account currency in cents or equivalent (e.g. 1000 represents \$10.00), and includes fees. It should be consistent across all transactions as this value is used to calculate profiles in a unified currency. Sender transaction information	
sender_transaction_bank_account_number	string	Sender's bank account number. Sender transaction information	5a800244-325a-4086-ab8a-23ecbb927be5
sender_transaction_category_purpose	string	Category of the purpose of the transaction (ISO 20022). Sender transaction information	cash_management
sender_transaction_currency	string	This field defines the currency of the sender_transaction_amount field (in accordance with ISO 4217, Alpha-3) and should be consistent across all transactions. This should also be the bank's official currency. Sender transaction information	GBP
sender_transaction_fee_amount	integer	Fee that is applied to the sender included in the sender_transaction_amount field, in cents (e.g. 1000 to represent \$10.00). Sender transaction information	
sender_transaction_fee_currency	string	Defines the currency of the sender_transaction_fee_amount field (in accordance with ISO 4217, Alpha-3). Sender transaction information	GBP
sender_transaction_fee_type	string	'Defines the method that is used to handle the payment charges or payment fees. Expected values include: - OUR : The sender of the payment will bear all of the payment transaction fees. The recipient of the payment will not pay any payment fees. - SHA (SHARed): The sender of the payment will pay all fees charged by the sending bank. The recipient of the payment will pay all fees charged by the receiving bank. - BEN (BENeficiary): The recipient of the payment will incur all of the payment transaction fees. The sender of the payment will not pay any payment fees. NOTE: Fees can happen at any stage of the transaction, it will depend on the Bilateral or multilateral agreements. Sender transaction information'	SHA
sender_transaction_foreign_exchange_rate	double	Foreign exchange rate, defined by the sender and receiving currencies. Sender transaction information	
sender_transaction_notes	string	Notes added by the sender, when performing the transfer, including note to self. Sender transaction information	my last rent installment
	integer		

Name	Type	Description	Example
sender_transaction_original_amount		Amount of the transaction performed by the sender, in the original currency, in cents or equivalent (e.g. 1000 to represent \$10.00). This amount includes the fees. Sender transaction information	
sender_transaction_original_currency	string	Defines the currency of the sender_transaction_original_amount field (in accordance with ISO 4217, Alpha-3). Sender transaction information	GBP
sender_transaction_purpose	string	Purpose of the transaction (ISO 20022). Sender transaction information	cash
sender_urgency	boolean	Identifies whether a transfer should be processed as urgent or not. Transfer information	
sender_zip	string	Sender's postal code. Sender general information	EH10 4BY
session_id	string	Id of the session that the user logged into. This should be consistent across all events within the same banking session, including payment initiations as it will be used to associate events to a session. Authentication information	9be65da3-ec5d-45c0-93c0-03afc5f7633b
session_register_date	integer	Session first seen timestamp, (in milliseconds since the Unix epoch)	
text_for_receiver	string	Free text message from the sender to the receiver. If the sender does not provide a message, this field is populated with the value NOTPROVIDED . Receiver transaction information	Transfer associated with the last rent installment. Please let me know once you receive the payment.
transaction_goal	string	Goal of the transfer. Each institution might have specific goals for certain types of transactions. These goals can be, for instance, the payment of taxes, bills or deposit. Transfer information	
transaction_method	string	Method of the transfer. Each institution might have specific payment methods for certain types of transactions. These methods can be, for instance, balance in the account or credit card. Transfer information	
trusted_receiver	boolean	Whether the receiver is included in the customer's list of trusted receivers. Transfer information	
ultimate_creditor_country_code	string	Ultimate Creditor's country code (in accordance with ISO 3166, Alpha-2). Sender general information	US
ultimate_creditor_dob	string	Ultimate creditor's date of birth (YYYYMMDD). Sender general information	19900101
ultimate_creditor_name	string	The transfer ultimate creditor name	John Doe
	string		US

Name	Type	Description	Example
ultimate_debtor_country_code		Ultimate Debtor's country code (in accordance with ISO 3166, Alpha-2). Sender general information	
ultimate_debtor_dob	string	Ultimate debtor's date of birth (YYYYMMDD). Sender general information	19900101
ultimate_debtor_name	string	The transfer ultimate debtor name	John Doe
user_email_address	string	Email associated with the bank's user. Authentication information	
user_id	string	The ID of the user that is working on a banking session on behalf of a main account, that could be joint or business and can be different from the customer ID.	3b74891a-04f2-43a0-9519-8e0c2d841986
user_name	string	The name of the user that is working on a banking session on behalf of a main account, that could be joint or business and can be different from the customer name.	John Doe
user_phone_number	string	Phone number associated with the bank user. Authentication information	447292738273482
user_phone_number_country_code	string	Country code associated with the bank user's phone number (in accordance with ISO 3166, Alpha-2). Authentication information	US
withdrawal_amount	integer	Withdrawal amount in cents (e.g. 1000 represents \$10.00). Transfer information	
_year	integer	Year of the export	2011
_month	integer	Month of the export	10
_day	integer	Day of the export	15
_hour	integer	Hour of the export	13